

NAVAL POSTGRADUATE SCHOOL Monterey, California



THESIS

NUMERICAL FIELD MODEL SIMULATION OF
FULL-SCALE FIRE TESTS IN A CLOSED
SPHERICAL/CYLINDRICAL VESSEL USING
ADVANCED COMPUTER GRAPHICS TECHNIQUES

by

Timothy G. McCarthy

SEPTEMBER 1991

Thesis Advisor:

M.D. Kelleher

Approved for public release: Distribution is unlimited

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No 0704-0188

a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS			
a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release: Distribution is unlimited			
b. DECLASSIFICATION/DOWNGRADING SCHEDULE						
c. PERFORMING ORGANIZATION REPORT NUMBER(S)			5. MONITORING ORGANIZATION REPORT NUMBER(S)			
a. NAME OF PERFORMING ORGANIZATION Naval Postgraduate School		6b. OFFICE SYMBOL (If applicable) ME	7a. NAME OF MONITORING ORGANIZATION Naval Postgraduate School			
c. ADDRESS (City, State and ZIP Code) Monterey, CA 93943-5000			7b. ADDRESS (City, State, and ZIP Code) Monterey, CA 93943-5000			
a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER			
c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBER			
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.
1. TITLE (Include Security Classification) NUMERICAL FIELD MODEL SIMULATION OF FULL-SCALE FIRE TESTS IN A CLOSED SPHERICAL/CYLINDRICAL VESSEL USING ADVANCED COMPUTER GRAPHICS TECHNIQUES						
2. PERSONAL AUTHORS TIMOTHY G. McCARTHY						
3a. TYPE OF REPORT Master's Thesis		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day) SEPTEMBER 1991		15. PAGE COUNT 157
6. SUPPLEMENTARY NOTATION The views expressed are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government						
7. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block numbers)			
FIELD	GROUP	SUB-GROUP	field model, fire simulation, fire modeling, numerical fire model, fires in enclosed vessels, enclosed fires			
9. ABSTRACT (Continue on reverse if necessary and identify by block numbers) Personnel and equipment casualties, caused by shipboard fires have adversely affected overall readiness of the U.S. Navy for centuries. Understanding the phenomena of fire in enclosed spaces, such as those found on surface ships and submarines, will greatly enhance the Navy's ability to combat or prevent them. This computer model was developed for use in conjunction with Fire-1, an experimental fire chamber test facility at the Naval Research Laboratory in Washington, D.C. It is a three-dimensional finite difference model which includes the phenomena of conduction, turbulence, global pressure correction, surface radiation and strong buoyancy flows. Given specific data on heat release, it predicts velocities, temperatures, pressures, densities and viscosities throughout its geometry. It has been reasonably validated by comparison with experiments in Fire-1. Advanced graphics techniques, such as color contouring and three-dimensional vector field plotting, have been applied to make output data more informative. This model, if easily modified to more specific geometries, may become a useful tool for naval architects in the design of the fire safe ship.						
10. DISTRIBUTION/AVAILABILITY OF ABSTRACT XX UNCLASSIFIED/UNLIMITED _ SAME AS RPT _ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION unclassified			
2a. NAME OF RESPONSIBLE INDIVIDUAL M.D. Kelleher			22b. TELEPHONE (Include Area Code) (408) 646-2530		22c. OFFICE SYMBOL ME/Kk	

Approved for public release: Distribution is unlimited

Numerical Field Model Simulation of Full-Scale Fire Tests
in a Closed Spherical/Cylindrical Vessel
Using Advanced Computer Graphics Techniques

by

Timothy G. McCarthy
Lieutenant, United States Navy
B.S.M.E., University of Rochester, Rochester, N.Y., 1984

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE
IN MECHANICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL

SEPTEMBER 1991



ABSTRACT

Personnel and equipment casualties, caused by shipboard fires have adversely affected overall readiness of the U.S. Navy for centuries. Understanding the phenomena of fire in enclosed spaces, such as those found on surface ships and submarines, will greatly enhance the Navy's ability to combat or prevent them. This computer model was developed for use in conjunction with Fire-1, an experimental fire chamber test facility at the Naval Research Laboratory in Washington, D.C. It is a three-dimensional finite difference model which includes the phenomena of conduction, turbulence, global pressure correction, surface radiation and strong buoyancy flows. Given specific data on heat release, it predicts velocities, temperatures, pressures, densities and viscosities throughout its geometry. It has been reasonably validated by comparison with experiments in Fire-1. Advanced graphics techniques, such as color contouring and three-dimensional vector field plotting, have been applied to make output data more informative. This model, if easily modified to more specific geometries, may become a useful tool for naval architects in the design of the fire safe ship.

TABLE OF CONTENTS

I.	INTRODUCTION	1
	A. BACKGROUND	1
	B. COMPUTER MODELING	3
	C. FIRE-1 TEST FACILITY	5
	D. THE COMPUTER PROGRAM	8
II.	DESCRIPTION OF NUMERICAL MODEL	11
	A. GOVERNING EQUATIONS	11
	B. INITIAL AND BOUNDARY CONDITIONS	13
	1. Initial Conditions	13
	2. Boundary Conditions	13
	C. MODELS OF PHYSICAL PHENOMENA	14
	1. Wall Conduction Model	14
	2. Turbulence Model	15
	3. Surface Radiation Model	17
III.	FINITE VOLUME CALCULATIONS	18
	A. INTRODUCTION	18
	B. CONTROL VOLUME ANALYSIS	20
	C. INTEGRATION OF THE CONSERVATION EQUATIONS	23
	D. DISCRETIZATION OF THE CONTINUITY EQUATION	24
	E. DISCRETIZATION OF THE ENERGY EQUATION	27
	F. DISCRETIZATION OF THE MOMENTUM EQUATION	39
	G. PRESSURE CORRECTION	47
	1. Global Pressure Correction	47
	2. Local Pressure Correction	49
IV.	NUMERICAL PROCESS	52
	A. INTRODUCTION	52
	B. SOLUTION PROCESS	55
	C. GRAPHICAL ANALYSIS	57
V.	CONCLUSIONS AND RECOMMENDATIONS	65
	A. CONCLUSIONS	65
	B. RECOMMENDATIONS	65
	APPENDIX	67

LIST OF REFERENCES	142
INITIAL DISTRIBUTION LIST	146

LIST OF TABLES

TABLE 4.1	MODEL PARAMETERS	52
TABLE 4.2	ADDITIONAL MODEL PARAMETERS	55

LIST OF FIGURES

Figure 1.1	Drawing of Fire-1 Test Vessel.	6
Figure 1.2	Sensor Locations of Fire-1 Test Vessel.	7
Figure 3.1	Basic Spherical Cell.	21
Figure 3.2	Basic Cylindrical Cell.	21
Figure 3.3	Two Dimensional Cell.	22
Figure 3.4	Two Dimensional Staggered Cell.	22
Figure 3.5	One Dimensional Quadratic Interpolation Scheme.	29
Figure 3.6	Calculation Cells for a Uniform Rectangular Grid.	33
Figure 4.1	Front View of Computer Model (YZ-Plane)	53
Figure 4.2	Side View of Computer Model (XY-Plane)	54
Figure 4.3	Temperature Profiles at 30 Seconds	59
Figure 4.4	Velocity Profile at 30 Seconds	60
Figure 4.5	Temperature Profile at 60 Seconds	61
Figure 4.6	Velocity Profile at 60 Seconds	62
Figure 4.7	Temperature Profile at 90 Seconds	63
Figure 4.8	Velocity Profile at 90 Seconds	64

LIST OF SYMBOLS AND ABBREVIATIONS

A	Area
A	Finite Difference Coefficients
ARU_	Source Term Variable
AU_	Source Term Variable
C_	Coefficients for Control Volume
C_M	Coefficients for Control Volume
C_P	Coefficients for Control Volume
COND_1	Coefficients for Control Volume
C _{pm}	Mean Isobaric Heat Capacity
CURV	Curvature Terms
CURVN	Orthogonal Curvature Terms
F _{Ai-Aj}	View Factor for Radiation Emitted by Surface i and Incident Upon Surface j
G	Gravitational Acceleration
G	Mass Flux Rate
G	Term Used in Radiation Model
g	Curvilinear Base Vector
g _i	Scaling Term
g _{ij}	Covariant Metric Tensor
g ^{ij}	Contravariant Metric Tensor
H	Mixing Length Parameter
h	Scale Factor
h	Convective Heat Transfer Coefficient
H	Enthalpy
J	Total Heat Flux
K	Adjustable Constant
k	Thermal Conductivity
M	Momentum Flux
m	Rate of Change
n	Normal Direction Toward the Vessel Center
P	Pressure
Pr	Prandtl Number
Pr _t	Turbulent Prandtl Number

q	Heat Flux
q_r	Thermal Radiation Energy
R	Universal Gas Constant
$R_{_}$	Source Term Variable
$RR_{_}$	Source Term Variable
Ri	Richardson Number
r	Distance Between Two Surfaces
S_f	Source Term
S_{hs}	Heat Source
S_{mp}	Mass Source Term
T	Temperature
t	Time
u	Velocity
V	Volume
VIS	Local Viscosity
X	Length in X-Direction (In QUICK Scheme)

GREEK LETTERS

β	Angles Formed by Radiation Surface Normals
χ	Term Used in Radiation Model
δ_{ij}	Kronecker Delta
ϵ	Emissivity
ϕ	Dissipation Function
μ	Dynamic Viscosity
θ	Directions, θ , r , and ϕ or z
ρ	Fluid Density
σ	Stress
σ	Stefan-Boltzmann Constant
ψ	Term Used in Radiation Model

SUBSCRIPTS

B	Control Volume to the Back
b	Back Control Volume Face
E	Control Volume to the East
EQ	Equilibrium

e	East Control Volume Face
eff	Effective
F	Control Volume to the Front
f	Front Control Volume Face
g	Global
N	Control Volume to the North
n	North Control Volume Face
o	Reference
p	Present Cell
R	Reference
S	Control Volume to the South
s	South Control Volume Face
s	Vessel Wall
W	Control Volume to the West
w	West Control Volume Face
,i	derivative with respect to i
,t	derivative with respect to time

SUPERSCRIPTS

n	Future Value
n-1	Present Value
*	Estimated Value
*	Ventilation Values
'	Correction
^	Prior Value

I. INTRODUCTION

A. BACKGROUND

Annually, the effects of fires on Naval forces are particularly devastating. Ships may be removed from service for repairs which incur costs that may run into the tens of millions of dollars. Personnel casualties, ship down time, equipment repair and replacement all result in a loss of overall readiness of our fleets. The prevention of shipboard fires is of the utmost importance to today's Navy. The understanding of the phenomena of fire, especially in the enclosed spaces found aboard ship, is the first step toward its control and prevention.

The study of fire propagation requires the combined knowledge of fluid dynamics, mass and heat transfer, and combustion. Research into the mechanics of fire and prediction of its behavior will aid engineers in reducing the probability of its ignition and propagation.

There are a number of ways to conduct this research. The most obvious is experimental. But, fires aboard ships are very complex. Often they are in enclosed airtight spaces which allow pressures to build. These spaces may be full of electronic equipment, flammables or toxic substances. Their accessibility may be extremely limited, hampering efforts to

combat fires. An experiment that can accurately account for all these complexities becomes very expensive.

At the Naval Research Laboratory in Washington, D.C., the Navy has built Fire-1, a large pressure vessel designed to model fires aboard submarines, or closed compartments and tanks found on surface ships. It allows fires to be studied under the unique conditions experienced in shipboard fires.

Another method for conducting fire research is the use of a computer model. As computers get faster and can allow for large amounts of data storage, researchers are able to thoroughly model fire phenomena and predict future behavior without the continuous expensive full scale testing of Fire-1. Fires may be modeled by the numerical solution of the governing equations. These models are then verified by the existing data from experiments. With an accurate computer model, several options are available. More complex geometries may be incorporated for specific areas of interest. Entire models of ships may someday be developed to show areas of susceptibility in design. Effects of firefighting methods may be accurately predicted. The savings in running computer codes versus full scale testing are considerable.

Also, now that a high speed VAXSTATION 3100 SPX/RJ19 Model 38 workstation may be dedicated to this particular simulation, computing costs may be minimized. The current code requires approximately 1.0 hours of VAXSTATION CPU per second of fire time.

B. COMPUTER MODELING

Field modeling uses difference forms of the conservation equations of mass, momentum, energy and species. These are used to calculate temperature, velocity, pressure, viscosity and density at specific points in the volume of interest. This volume, being the compartment studied, is broken down to finite volume elements. The conservation equations are solved at this level for discrete time steps from a known initial condition. Additional models of physical effects such as radiation, turbulence, and wall conduction are included to increase the simulation's validity. This method requires large amounts of computer memory and high speed processors.

Much research has been done previously and has provided the basis for this thesis. At the University of Notre Dame [Refs. 1 and 2] work has been conducted involving aircraft cabin fires using a two dimensional finite difference field model which predicts velocity, temperature and smoke concentration inside the passenger area of an aircraft. Nicolette et al. [Ref. 3] developed a two dimensional model of transient cooling by natural convection. It utilized a fully transient, semi-implicit upwind differencing scheme and global pressure correction that was verified experimentally.

More recent [Refs. 4 through 12] studies have developed numerical solutions for three dimensional rectangular enclosures in which non-linear partial differential equations were solved by finite difference methods. Models for three

dimensional cylindrical coordinate buoyant flows [Refs. 13 through 19] have also been developed, and deal mainly with horizontal annuli with differential temperatures specified at inner and outer cylindrical walls. Smutek et al. [Ref. 18] studied buoyant flows in horizontal cylinders with differentially heated ends at low Rayleigh numbers ($74 \leq Ra \leq 18700$). Yang et al. [Ref. 19] conducted a similar study but with high Rayleigh numbers ($10^4 \leq Ra \leq 10^7$).

Studies have also been done on methods for decoupling the pressure terms from the Navier-Stokes Equation. The stream function-vorticity formulation has been used [Refs. 13 through 18] to calculate natural convection in various geometries. There are problems with this method such as instability at high Rayleigh numbers. Yang et al. [Ref. 19] address this problem and suggest using a primitive variable formulation when using arbitrary orthogonal coordinates.


Natural convection in spherical annuli was studied by Ozoe [Ref. 20] utilizing velocity-vector formulation. Field models involving prediction of fires in enclosures have been studied by Baum and Rehm [Refs. 21 through 24]. These include time dependent Boussinesq equations to simulate three dimensional buoyant convection and smoke aerosol coagulation. Field models involving three dimensional enclosures and employing the Boussinesq approximation, were studied by Bagnaro et al. [Ref. 25] and by Markatos and Pericleous [Ref. 26].

In this thesis, the numerical method developed by Yang et al. [Ref. 19] using primitive variable finite difference discretization in generalized orthogonal coordinates is employed. This method can handle complex geometries and has the numerical stability characteristic of primitive variable formulation.

C. FIRE-1 TEST FACILITY

An experimental test facility called Fire-1, has been constructed at the Naval Research Laboratory to study the behavior of fires in enclosed spaces found on submarines and surface ships. Since the computer code presented in this thesis models the geometry of Fire 1, this section contains a brief description of that facility. More information may be obtained from Alexander et al. [Ref. 27]. Figure 1.1 shows the basic layout. Fire-1 is a cylindrical pressure vessel with hemispherical endcaps. It is constructed of 3/8-inch ASTM 295 Grade C steel and can withstand internal pressures up to 89.7 psi and temperatures of 450°F. Its total length is 46.6 feet long. The cylinder and endcap radii are both 9.6 feet. Rupture discs are placed at each endcap to prevent failure due to overpressurization.

Figure 1.2 shows the instrumentation layout. An array of chromel-alumel thermocouples with ceramic insulation and stainless steel jackets, are placed near each endcap. Additional thermocouples are placed on the chamber walls, both

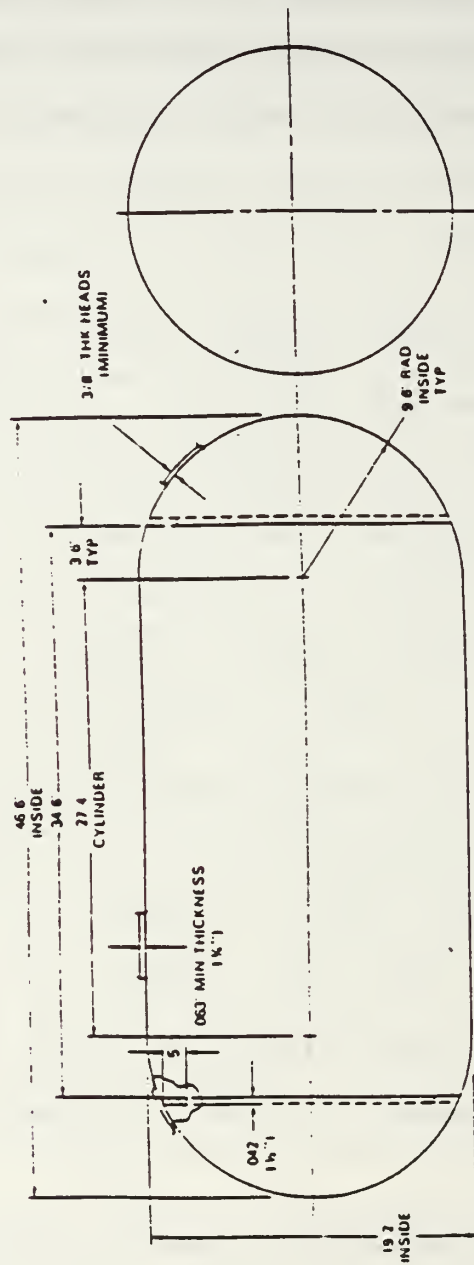

NOTES UNLESS OTHERWISE SPECIFIED

- 1 ALL DIMENSIONS IN FEET
- 2 MATERIAL A 516 2HS GRADE C STEEL
- 3 FINISH PRIME COAT OUTSIDE SURFACE & PAINT
- 4 CONTRACTOR TO PRESSURE TEST PER
A S ME CODE FOR 1.5 P.S.I. WORKING
PRESSURE INTERNAL AT NPL
- 5 INSTALLATION AT NPL
- 6 TANK VOLUME
SPHERE 3 1/8 CU FT
CYLINDER 7.93 CU FT
TOTAL 11.639 CU FT ± 3%
- 7 EXTERIOR LIFTING LUGS OPTIONAL
- 8 WELDED CONSTRUCTION

Fig 1 - Blueprint drawing of 324 m³ chamber

Figure 1.1 Drawing of Fire-1 Test Vessel.

inside and out, to monitor inside and outside wall temperatures. A specific test might call for placement of extra thermocouples or radiometers at various other locations. These are arranged as required by the experiment.

Burn rate data is obtained using round, tapered edge fire pans of various cross sectional areas, and a constant level, liquid fuel supply system. To date, this data has been the least accurate in the experiment. The system and its calibration are described by Alexander et al. [Ref. 27]. Smoke concentration can be measured using video cameras, particle analysis and obscuration with laser detectors.

To more completely represent shipboard compartments, the facility has a number of features. First is the installation of two removable decks, one at the midheight, the other at three feet above the bottom. Either grated or solid deck plating is used depending on desired configuration. Second is the installation of a nitrogen pressurization system used as an extinguishing agent. Its performance is being tested for possible use combatting actual fires.

D. THE COMPUTER PROGRAM

This computer model is a joint project undertaken by the Naval Postgraduate School and the University of Notre Dame. It represents a low cost alternative to full scale test using Fire-1. With proper modifications, used in conjunction with

Fire-1, it will test effectiveness of damage-control systems and evaluate new ship designs.

In the work by Nies [Ref. 28], the code was based on a rectangular geometry with the volume identical to Fire-1. This was a three dimensional, finite volume model using primitive variables. Turbulence, wall conduction, and a global pressure correction factor were also included. Due to the unreliability of burn rate data, Nies [Ref. 28] devised a scheme for computing a heat release rate by using experimental pressure curves as input.

The actual geometry of Fire-1 was employed by Raycraft [Ref. 29]. Using its spherical/cylindrical coordinate system and detailed formulation of radiation surface view factors, global pressure correction, conduction and turbulence, the code created an extremely viable model for use with Fire-1. There were the continued problems with simulating the heat release data which were partially resolved by numerically fitting experimental burn rate data available.

Houck [Ref. 31] included a model which simulated internal forced circulation. It was compared to data run without circulation and it was concluded that circulation had minimal effects on the overall velocity and temperature profiles.

In this thesis, advanced three dimensional and color graphics techniques are used to present data generated using the previously developed codes. Using the VAXSTATION 3100 SPX and the software CA-DISSPLA [Ref. 31] the data is presented in

a more informative fashion. Color graphics are used to present isotherm profiles and three dimensional vector fields will represent velocity profiles.

II. DESCRIPTION OF NUMERICAL MODEL

A. GOVERNING EQUATIONS

The model is based on the system of conservation equations which govern the behavior of fluid flow and heat transfer in gases. These equations are in differential form and are presented in generalized curvilinear coordinates using standard tensor notation. Nies [Ref. 28] based his model on rectangular geometry using Cartesian coordinates. Raycraft [Ref. 29] refined the model to describe the exact geometry of Fire-1 and included surface radiation. Houck [Ref. 30] described the transformation to curvilinear coordinates, used by Yang et al. [Ref. 19], in detail and the following forms of the governing equations are obtained.

The equation of continuity is:

$$\rho_t + \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} \left\{ \sqrt{g} \rho \frac{u^i}{h_i} \right\} = 0 \quad (2.1)$$

The energy equation becomes:

$$\begin{aligned} & \left(\rho C_{pm} T \right)_t + \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} \left\{ \sqrt{g} \rho C_{pm} u^i \frac{T}{h_i} \right\} \\ & = \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} \left\{ \sqrt{g} \frac{k_{eff} T_{,i}}{h_i^2} \right\} + S_f \end{aligned} \quad (2.2)$$

where the source term, S_f is:

$$S_f = \mu \Phi + P \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} \left\{ \sqrt{g} \frac{u^i}{h_i} \right\} + S_{hs} \quad (2.3)$$

and the dissipation term is:

$$\begin{aligned} \Phi = & 2 \left\{ \left(\frac{u^i}{h_i} \right)_{,j} \right\}^2 \delta_{ij} \\ & + \left\{ \left(\frac{u^i}{h_i} \right)_{,j} (1 - \delta_{ij}) \right\}^2 - \frac{2}{3} \left\{ \left(\frac{u^i}{h_i} \right)_{,i} \right\}^2 \end{aligned} \quad (2.4)$$

S_{hs} is the heat source term which is zero everywhere except nodes at the fire's location and δ_{ij} is the Kronecker Delta.

The momentum equation becomes:

$$\begin{aligned} & (\rho u^i)_{,t} + \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} \left\{ \sqrt{g} \frac{u^i u^j}{h_j} \right\} \\ & = -\frac{P_{,i}}{h_i} + \rho G^i + \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^j} \left\{ \frac{\sqrt{g} \sigma_i^j}{h_j} \right\} \\ & - \frac{1}{h_i h_j} \frac{\partial h_i}{\partial \theta^j} (\rho u^i u^j - \sigma_i^j) + \frac{1}{h_i h_j} \frac{\partial h_j}{\partial \theta^i} (\rho u^j u^i - \sigma_j^i) \end{aligned} \quad (2.5)$$

where the stress tensor is:

$$\begin{aligned} \sigma_i^j = & \mu_{eff} \left\{ \frac{h_j}{h_i} \frac{\partial}{\partial \theta^i} \left(\frac{u^j}{h_j} \right) \right. \\ & \left. + \frac{h_i}{h_j} \frac{\partial}{\partial \theta^j} \left(\frac{u^i}{h_i} \right) + \frac{\delta_{ij}}{h_i h_j} \frac{\partial q_{ii}}{\partial \theta^m} \left(\sqrt{g} \frac{u^m}{h_m} \right) \right\} \end{aligned} \quad (2.6)$$

Effective conductivity k_{eff} and dynamic viscosity μ_{eff} include both laminar and turbulent terms. Additional terms found in

the momentum equation are due to coriolis and centrifugal effects.

The equations of state remain unchanged through coordinate transformations and are given as:

$$P = \rho R T \quad (2.7)$$

$$\mathcal{H} = C_{pm} (T - T_R) \quad (2.8)$$

B. INITIAL AND BOUNDARY CONDITIONS

In order to solve this system of differential equations, boundary and initial conditions must be determined and applied.

1. Initial Conditions

The initial conditions for the model are determined from conditions present just prior to ignition in Fire-1. The air inside is totally at rest. The temperature is equal to ambient temperature and is assumed uniform throughout. Therefore, in the model, the entire velocity field is set to zero and the non-dimensional temperature field is set to 1.0 which corresponds to ambient temperature. Pressure and density distributions are at static equilibrium.

2. Boundary Conditions

Since the vessel wall is a solid boundary which is nonporous, the velocities, both normal and tangential to the wall, are zero. Mass flux across the wall is also zero. The temperature of the wall is equal to the temperature of the

fluid at the interface. Conservation of energy must also be met at the interface. The following three equations summarize wall boundary conditions:

$$u_{surf}^i = 0 \quad (2.9)$$

$$T_{fluid} = T_{solid} \quad (2.10)$$

$$q_r - k_f \frac{\partial T}{\partial n} \big|_f = -k_s \frac{\partial T}{\partial n} \big|_{solid} \quad (2.11)$$

where q_r is the heat flux arriving at the solid/fluid interface and n is the normal direction of the surface into the enclosure. There is conduction through the wall and convection from outer surface to ambient temperature.

Due to singularities occurring at $r=0$ in cylindrical/spherical coordinates, special care must be taken at the origin. Yang et al. [Ref. 19:pp. 167-168] discuss methods for addressing this problem. In this model, two consecutive control volumes are placed at $r=0$ and continuity is applied.

C. MODELS OF PHYSICAL PHENOMENA

1. Wall Conduction Model

This model calculates heat loss from the vessel through the walls to the environment. It assumes one dimension, unsteady heat flow and constant convective heat

transfer coefficient at the wall's exterior. The energy equation is:

$$(\rho_s C_{ps} T)_t = \frac{1}{\sqrt{g}} \frac{\partial}{\partial \theta^i} (\sqrt{g} k_s T_{,j} g^{ij}) + S \quad (2.12)$$

2. Turbulence Model

The turbulence model is a simple algebraic method used to predict mean flow quantities for incompressible boundary layer flows. Developed by Nee and Liu [Ref. 33], the model determines the effective viscosity in recirculating buoyant flows with large variations in turbulence levels. The equation, transformed into generalized curvilinear coordinates, is:

$$\frac{\mu_{eff}}{\mu_o} = 1 + \frac{\left(\frac{\ell}{H}\right)^2 \sqrt{\left(\frac{1}{h_j} \frac{\partial u^i}{\partial \theta^j}\right)(1 - \delta_1^j)}}{2 + \frac{Ri}{Pr_t}} \quad (2.13)$$

where ℓ/H is a non-dimensional mixing length parameter given as:

$$\frac{\ell}{H} = K \left\{ \frac{\sqrt{u^i u^i}}{\sqrt{\sum_{ij} \left(\frac{1}{h_j} \frac{\partial u^i}{\partial \theta^i} \right)^2}} + \frac{\sqrt{\sum_{ij} \left(\frac{1}{h_j} \frac{\partial u^i}{\partial \theta^j} \right)^2}}{\sqrt{\sum_{ij} \left(\frac{1}{h_i h_j} \frac{\partial^2 u^i}{\partial \theta^i \partial \theta^j} \right)^2}} \right\} \quad (2.14)$$

K is an adjustable constant and the Richardson Number, Ri, is given as:

$$Ri = \frac{H}{u_i^2} \frac{\left(\frac{\partial T}{\partial n} \right) \vec{n} \cdot \vec{g}}{\left[\left(\frac{\partial u^1}{\partial n} \right) \vec{n} \cdot \vec{g} \right]^2 + \left[\left(\frac{\partial u^2}{\partial n} \right) \vec{n} \cdot \vec{g} \right]^2 + \left[\left(\frac{\partial u^3}{\partial n} \right) \vec{n} \cdot \vec{g} \right]^2} \quad (2.15)$$

\vec{n} is a unit vector in the opposite direction of gravity.

Pr_t is the turbulent Prandtl number which is also used to compute the effective conductivity.

$$k_{eff} = \frac{1}{Pr} + \frac{1}{Pr_t} \frac{\mu_{eff}}{\mu_o} \quad (2.16)$$

Pr is the molecular Prandtl number.

3. Surface Radiation Model

Raycraft [Ref. 29, pp. 24-44] describes this model in detail. Summarizing, the radiation model considers only surface radiation. Smoke and gases are considered transparent. Inside the model, walls and flame areas are treated as surfaces. Each surface is considered to be gray and diffuse. Sparrow and Cess [Ref. 34] discuss the net radiosity method upon which this model is based.

Net rate of heat loss per unit area is given as:

$$\frac{Q_i}{A_i} = \sum_{j=1}^N G_{ij} \sigma T_j^4 \quad (2.17)$$

where

$$G_{ij} = \frac{\epsilon_i}{1 - \epsilon_i} (\delta_{ij} - \psi_{ij}) \quad (2.18)$$

$$\psi_{ij} = \chi_{ij}^{-1}$$

$$\chi_{ij} = \frac{\delta_{ij} - (1 - \epsilon_i) F_{Ai-Aj}}{\epsilon_i} \quad (2.19)$$

F_{Ai-Aj} is the view factor of radiation emitted by surface i onto surface j. The general equation is given by

$$F_{Ai-Aj} = \frac{1}{A_i} \int_{A_i} \int_{A_j} \frac{\cos \beta_i \cos \beta_j dA_i dA_j}{\pi r^2} \quad (2.20)$$

III. FINITE VOLUME CALCULATIONS

A. INTRODUCTION

The numerical model's independent variables are time and three space coordinates. Dependent variables consist of the three dimensional components of velocity, temperature, pressure and density. These six unknowns require six equations for solution. They are the continuity equation (Eq. (2.1)), the three momentum equations (Eq. (2.5)), the energy equation (Eq. (2.2)), and the equations of state (Eq. (2.7) and (2.8)). Doria [Ref. 35] discretized these equations in a method similar to this particular model based on the generalized form presented by Patanker [Ref. 36]. Doria applied the conservation equations in integral form to each control volume creating a set of finite difference equations which would lead to a solution.

Each control volume, or cell, surrounds a nodal point where one value of each property is constant throughout. The center nodal point determines pressure density and temperature. The grid determining velocities are staggered by one-half a cell length. Patanker [Ref. 36:pp. 115-120] describes how this alleviates two problems: the pressure differential between the two adjacent nodes, which ultimately determines the velocity at the node in question, is based on

a length which is half as long as in the unstaggered cell (this reduces error by one half); second, stability is gained by this stagger which precludes unrealistic, wavy oscillatory velocity fields, since the difference of adjacent velocities are used to satisfy continuity.

Since primitive variables are used versus the stream function, the pressure term coupling between equations must be handled specially. An iterative procedure estimates pressure and then pressure is corrected to ensure continuity is satisfied for each cell. A local pressure correction is discussed by both Patanker [Ref. 36:pp. 120-128] and Doria [Ref. 35:pp. 26-32]. A global pressure correction is included in the model to handle net energy changes and is described by Nicolette, et al. [Ref. 3].

The finite difference equations are solved iteratively. Non-linear problems like fluid flow are difficult to force convergence to final solution. Many schemes have been developed to obtain the flow problem solution. Each method has its problems and instabilities. This model employs the Quadratic Upstream Interpolation for Convective Kinematics, or QUICK, developed by Leonard [Ref. 37]. QUICK estimates values and gradients of transport variables at the faces of the cells. It has the accuracy of central finite difference schemes and the stability of convective diffusion terms found in upwind differencing. Yang [Ref. 12] applied the QUICK scheme to coupled momentum energy and pressure equation

solutions for three-dimensional flow in tilted rectangular enclosures.

In this chapter, the governing equations will be applied to the specialized control volumes of the model. They will be put in integral form and discretized according to the QUICK scheme. Pressure correction from iteration will also be applied.

B. CONTROL VOLUME ANALYSIS

At the center of each elemental control volume, or cell, lies the grid point of interest. At this point, the model determines the unknown values of the dependent variables. Denoting this grid point as $P(i, j, k)$ we define its neighbors as: East $(i+1, j, k)$, West $(i-1, j, k)$, North $(i, j+1, k)$, South $(i, j-1, k)$, Front $(i, j, k+1)$, and Back $(i, j, k-1)$. The boundaries around P are designated by lower case letters $e, w, n, s, f,$ and b . Typical spherical and cylindrical cells are shown in Figures 3.1 and 3.2 respectively.

Figure 3.3 shows the basic two dimensional cell used to determine pressure, density and temperature. In contrast, Figure 3.4 shows the staggered grid used to determine velocities. The velocity u_i^1 is located on the west face; u_i^2 is located on the south face and u_i^3 is located on the back face (not shown). The superscripts on the velocities designate

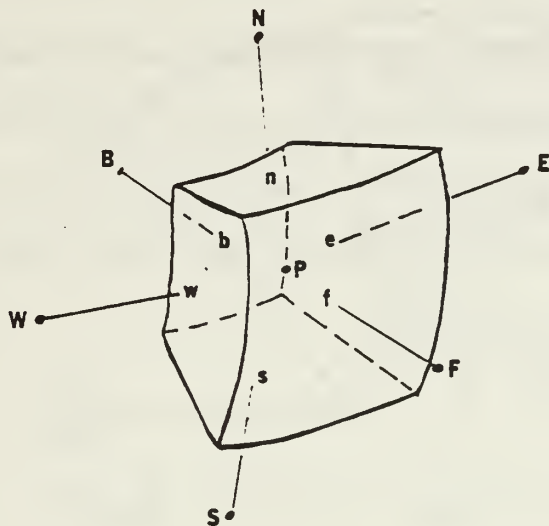


Figure 3.1 Basic Spherical Cell.

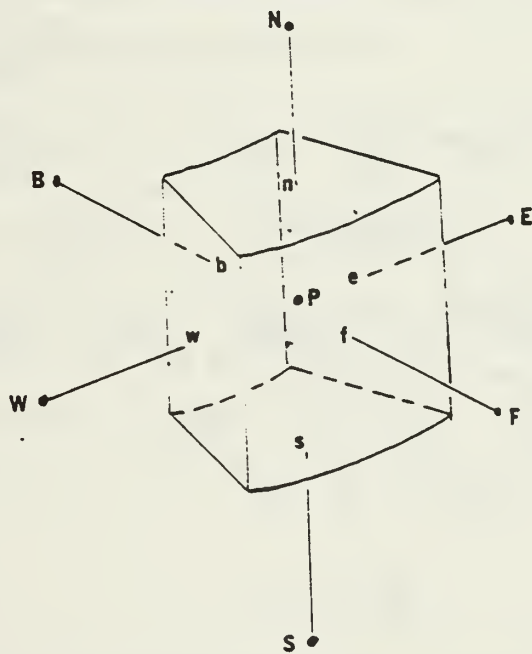


Figure 3.2 Basic Cylindrical Cell.

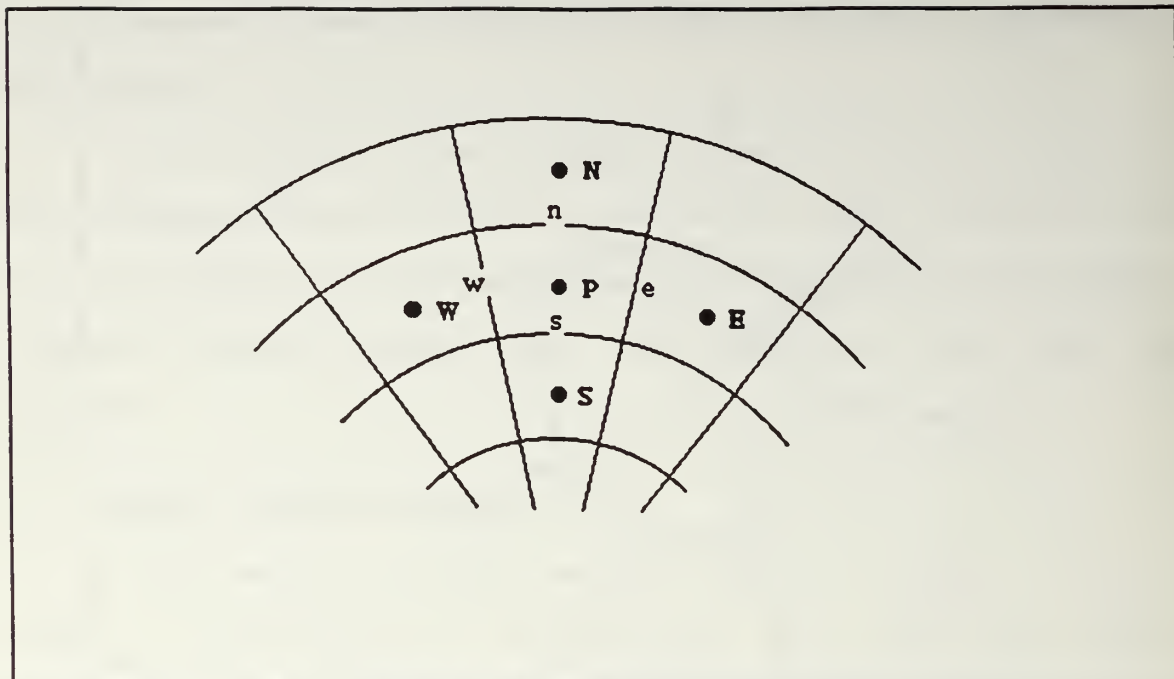


Figure 3.3 Two Dimensional Cell.

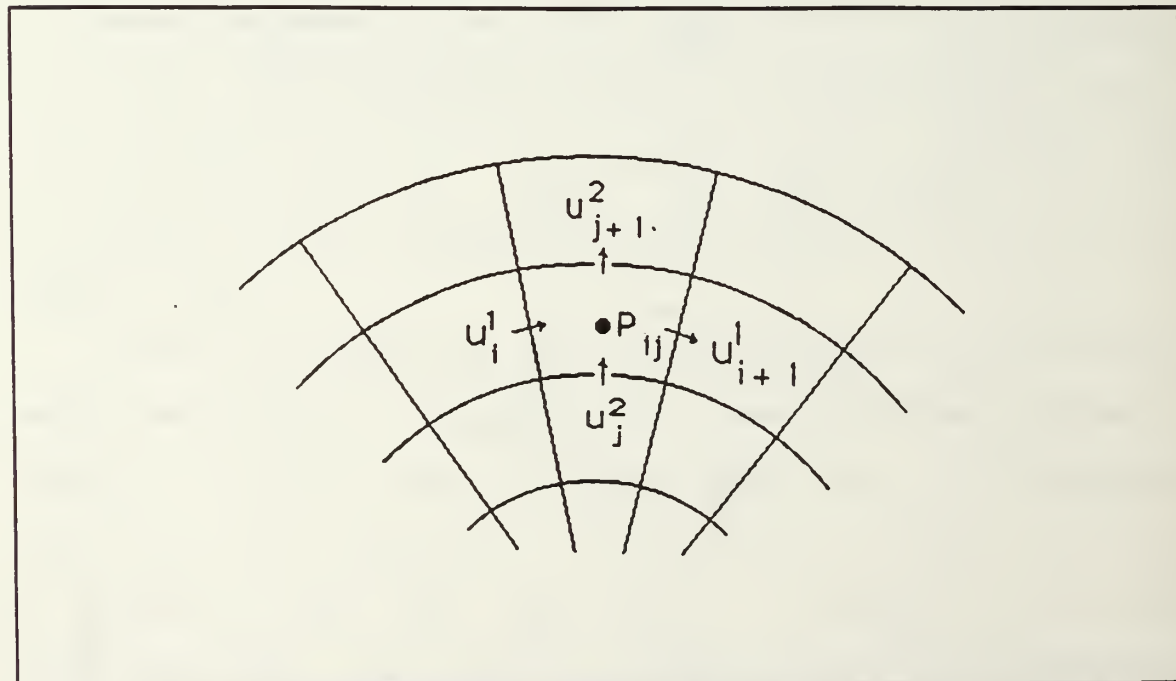


Figure 3.4 Two Dimensional Staggered Cell.

coordinate direction. These velocities are staggered in location by one-half cell length from the primary cell.

C. INTEGRATION OF THE CONSERVATION EQUATIONS

The conservation equations are integrated over each cell volume. From this point, they can be discretized into finite difference equations. The integral form of the continuity equation is:

$$\begin{aligned}
 & \int \frac{\partial \rho}{\partial t} h_1 h_2 h_3 \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
 & + \int \left[\frac{\partial}{\partial \theta^1} (\rho u^1 h_2 h_3) + \frac{\partial}{\partial \theta^2} (\rho u^2 h_3 h_1) \right. \\
 & \left. + \frac{\partial}{\partial \theta^3} (\rho u^3 h_1 h_2) \right] \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
 & = 0
 \end{aligned} \tag{3.1}$$

The energy equation becomes:

$$\begin{aligned}
 & \int \frac{\partial (\rho C_{pm} T)}{\partial t} h_1 h_2 h_3 \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
 & + \int \left[\frac{\partial}{\partial \theta^1} (\rho C_{pm} u^1 T h_2 h_3) + \frac{\partial}{\partial \theta^2} (\rho C_{pm} u^2 T h_1 h_3) \right. \\
 & \left. + \frac{\partial}{\partial \theta^3} (\rho C_{pm} u^3 T h_1 h_2) \right] \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
 & - \int \left[\frac{\partial}{\partial \theta^1} (q^1 h_2 h_3) + \frac{\partial}{\partial \theta^2} (q^2 h_1 h_3) + \frac{\partial}{\partial \theta^3} (q^3 h_1 h_2) \right] \\
 & \cdot \partial \theta^1 \partial \theta^2 \partial \theta^3 + \int S h_1 h_2 h_3 \partial \theta^1 \partial \theta^2 \partial \theta^3
 \end{aligned} \tag{3.2}$$

where:

$$q^1 = \frac{-k}{h_1} \frac{\partial T}{\partial \theta^1} \tag{3.3}$$

The momentum equations become:

$$\begin{aligned}
& \int \frac{\partial}{\partial t} (\rho u^i) h_1 h_2 h_3 \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
& + \int \frac{\partial}{\partial \theta^j} \left[\left(\frac{h_1 h_2 h_3}{h_j} \right) \rho u^i u^j \right] \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
& = \int \frac{-\partial}{\partial \theta^i} \left(P \frac{h_1 h_2 h_3}{h_i} \right) \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
& + \int \rho G_i h_1 h_2 h_3 \partial \theta^1 \partial \theta^2 \partial \theta^3 \tag{3.4} \\
& + \int \frac{\partial}{\partial \theta^j} \left(\sigma^{ij} \frac{h_1 h_2 h_3}{h_i h_j} \right) \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
& - \int \frac{h_1 h_2 h_3}{h_i h_j} \left[\frac{\partial h_i}{\partial \theta^j} (\rho u^j u^i - \sigma^{ij}) \right] \partial \theta^1 \partial \theta^2 \partial \theta^3 \\
& + \int \frac{h_1 h_2 h_3}{h_j h_i} \left[\frac{\partial h_j}{\partial \theta^i} (\rho u^i u^j - \sigma^{ji}) \right] \partial \theta^1 \partial \theta^2 \partial \theta^3
\end{aligned}$$

D. DISCRETIZATION OF THE CONTINUITY EQUATION

To provide maximum stability and accuracy for the model, three finite differencing schemes are utilized. Forward differencing is used for time dependence, central differencing is used for diffusion terms and the QUICK algorithm is used for the convective terms.

In forward differencing the future value of the time dependent variable is predicted from its previous value plus an additional term derived from the previously known slope m multiplied by the time step Δt . For example the new value for

density ρ^n is calculated using the old value ρ^{n-1} plus the extra term:

$$\rho^n = \rho^{n-1} + m\Delta t \quad (3.5)$$

The integrand in the continuity equation (3.1) becomes:

$$\frac{\partial \rho}{\partial t} dV = \frac{\rho^n - \rho^{n-1}}{\Delta t} h_1 h_2 h_3 \Delta\theta^1 \Delta\theta^2 \Delta\theta^3 = \frac{\rho^n - \rho^{n-1}}{\Delta t} \Delta V \quad (3.6)$$

Evaluating the integral, Equation (3.1) becomes:

$$\begin{aligned} & (\rho^n - \rho^{n-1}) \frac{\Delta V}{\Delta t} + [\rho u^1 h_2 h_3 d\theta^2 d\theta^3]_e - [\rho u^1 h_2 h_3 d\theta^2 d\theta^3]_w \\ & + [\rho u^2 h_1 h_3 d\theta^1 d\theta^3]_n - [\rho u^2 h_1 h_3 d\theta^1 d\theta^3]_s \\ & + [\rho u^3 h_1 h_2 d\theta^1 d\theta^2]_f - [\rho u^3 h_1 h_2 d\theta^1 d\theta^2]_b = 0 \end{aligned} \quad (3.7)$$

The mass flux, G , must be calculated at each face:

$$G_e = (\rho u^1)_e = u_e^1 \left[\frac{\rho_p (h_1 \Delta\theta^1)_{i+1} + \rho_E (h_1 \Delta\theta^1)_i}{(h_1 \Delta\theta^1)_{i+1} + (h_1 \Delta\theta^1)_i} \right] \quad (3.8)$$

$$G_w = (\rho u^1)_w = u_w^1 \left[\frac{\rho_p (h_1 \Delta\theta^1)_{i-1} + \rho_W (h_1 \Delta\theta^1)_i}{(h_1 \Delta\theta^1)_{i-1} + (h_1 \Delta\theta^1)_i} \right] \quad (3.9)$$

$$G_n = (\rho u^2)_n = u_n^2 \left[\frac{\rho_p (h_2 \Delta\theta^2)_{j+1} + \rho_N (h_2 \Delta\theta^2)_j}{(h_2 \Delta\theta^2)_{j+1} + (h_2 \Delta\theta^2)_j} \right] \quad (3.10)$$

$$G_s = (\rho u^2)_s = u_s^2 \left[\frac{\rho_p (h_2 \Delta\theta^2)_{j-1} + \rho_S (h_2 \Delta\theta^2)_j}{(h_2 \Delta\theta^2)_{j-1} + (h_2 \Delta\theta^2)_j} \right] \quad (3.11)$$

$$G_f = (\rho u^3)_f = u_f^3 \left[\frac{\rho_P (h_3 \Delta \theta^3)_{k+1} + \rho_F (h_3 \Delta \theta^3)_k}{(h_3 \Delta \theta^3)_{k+1} + (h_3 \Delta \theta^3)_k} \right] \quad (3.12)$$

$$G_b = (\rho u^3)_b = u_b^3 \left[\frac{\rho_P (h_3 \Delta \theta^3)_{k-1} + \rho_B (h_3 \Delta \theta^3)_k}{(h_3 \Delta \theta^3)_{k-1} + (h_3 \Delta \theta^3)_k} \right] \quad (3.13)$$

The areas of the faces of the cell are given as:

$$A_{e,w} = (h_2 \Delta \theta^2 h_3 \Delta \theta^3)_{e,w} \quad (3.14)$$

$$A_{n,s} = (h_1 \Delta \theta^1 h_3 \Delta \theta^3)_{n,s} \quad (3.15)$$

$$A_{f,b} = (h_1 \Delta \theta^1 h_2 \Delta \theta^2)_{f,b} \quad (3.16)$$

In final finite difference form the continuity equation becomes:

$$\frac{(\rho^n - \rho^{n-1}) \Delta V}{\Delta t} + G_e - G_w + G_n - G_s + G_f - G_b = S_{mp} \quad (3.17)$$

S_{mp} is the mass source term. As this residual approaches zero, the solution approach the exact solution. Iterations occur until S_{mp} reaches a specific, extremely small, cut off value.

E. DISCRETIZATION OF THE ENERGY EQUATION

Integrating over the control volume, the energy equation becomes:

$$\begin{aligned}
 & [(\rho C_{pm} T)^n - (\rho C_{pm} T)^{n-1}] \frac{\Delta V}{\Delta t} + G_e (C_{pm} T)_e A_e \\
 & - G_w (C_{pm} T)_w A_w + G_n (C_{pm} T)_n A_n - G_s (C_{pm} T)_s A_s + \\
 & G_f (C_{pm} T)_f A_f - G_b (C_{pm} T)_b A_b \\
 & = k_e A_e \left(\frac{\partial T}{h_1 \partial \theta^1} \right)_e - k_w A_w \left(\frac{\partial T}{h_1 \partial \theta^1} \right)_w \\
 & + k_n A_n \left(\frac{\partial T}{h_2 \partial \theta^2} \right)_n - k_s A_s \left(\frac{\partial T}{h_2 \partial \theta^2} \right)_s \\
 & + k_f A_f \left(\frac{\partial T}{h_3 \partial \theta^3} \right)_f - k_b A_b \left(\frac{\partial T}{h_3 \partial \theta^3} \right)_b + S_f \Delta V
 \end{aligned} \tag{3.18}$$

where S_f is the source term including dissipation, radiation, pressure work and heat sources. The total heat flux, J , resulting from convection and conduction is:

$$J_{e,w}^1 = \left[(\rho C_{pm} u^1 T) - k_{eff} \frac{\partial T}{h_1 \partial \theta^1} \right]_{e,w} \tag{3.19}$$

$$J_{n,s}^2 = \left[(\rho C_{pm} u^2 T) - k_{eff} \frac{\partial T}{h_2 \partial \theta^2} \right]_{n,s} \tag{3.20}$$

$$J_{f,b}^3 = \left[(\rho C_{pm} u^3 T) - k_{eff} \frac{\partial T}{h_3 \partial \theta^3} \right]_{f,b} \tag{3.21}$$

The final finite difference form of the energy equation becomes:

$$\begin{aligned} & [(\rho C_{pm} T)^n - (\rho C_{pm} T)^{n-1}] \frac{\Delta V}{\Delta t} + J_e^1 A_e \\ & - J_w^1 A_w + J_n^2 A_n - J_s^2 A_s + J_f^3 A_f - J_b^3 A_b = S_f \Delta V \end{aligned} \quad (3.22)$$

The term $(\rho u^i C_{pm} T)$ in the flux equations give rise to difficulties since C_{pm} , ρ and T are evaluated at the nodal point instead of the surface of the cell. Thus, fluxes are determined from values of ρ , T , and C_{pm} at P and its neighbors.

The QUICK Scheme is used to determine accurate values of the dependent variables at the control volume surfaces with stable properties. QUICK couples the stability of upwind differencing with the accuracy of central differencing. It is achieved by using a parabolic polynomial interpolation to fit the control volume at three consecutive nodal points. Two nodes are located on either side of the surface and one is located upstream. Yang [Ref. 12:pp. 77-89] discusses QUICK for one, two and three dimensions. Houck [Ref. 30:pp. 37-50] and Raycraft [Ref. 29:pp. 63-74] used the QUICK scheme for the energy equations and that method is repeated here.

Figure 3.5 from Raycraft [Ref. 29:pp. 64] shows the one dimensional scheme for the quadratic interpolation of a non-uniform grid.

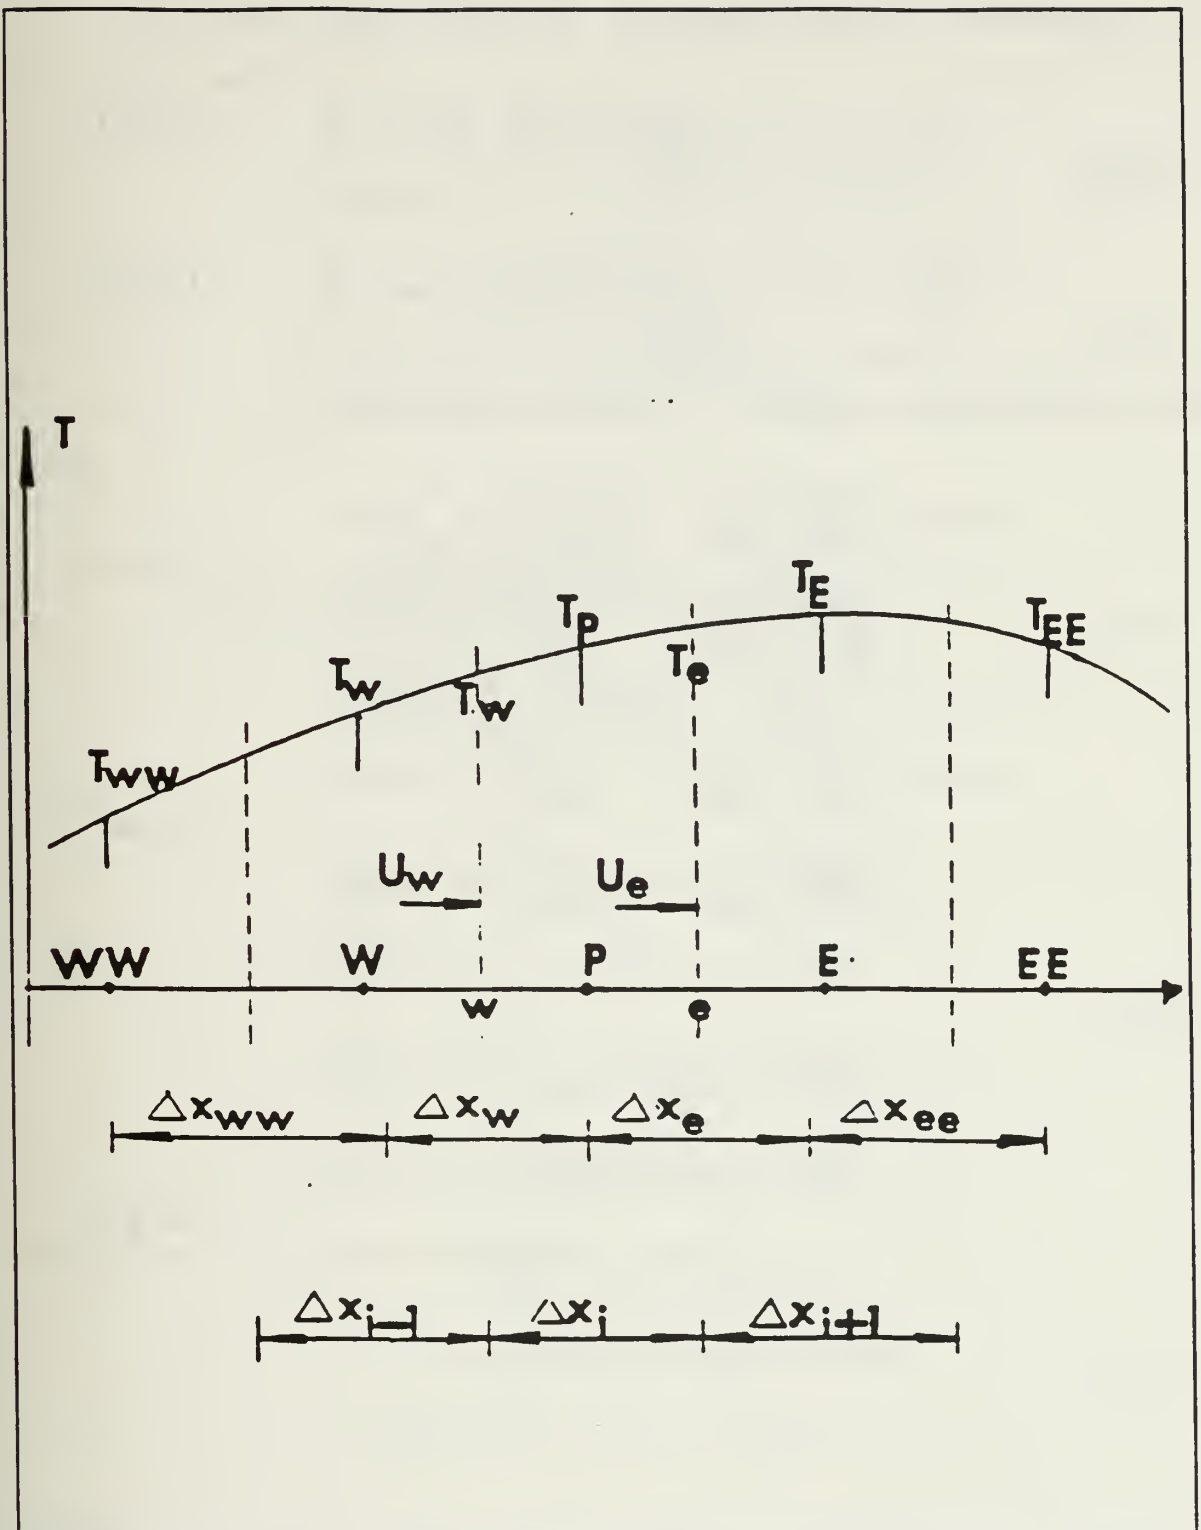


Figure 3.5 One Dimensional Quadratic Interpolation Scheme.

It is given by the equations

$$(\rho C_{pm} u T)_e = G_e C_{pm} \left[\left(\frac{T_p + T_E}{2} \right) - \frac{1}{8} \text{curv}_e \right] \quad (3.23)$$

$$(\rho C_{pm} v T)_w = G_w C_{pm} \left[\left(\frac{T_p + T_w}{2} \right) - \frac{1}{8} \text{curv}_w \right] \quad (3.24)$$

where the upstream weighted curvature terms are:

$$\begin{aligned} \text{curv}_e &= \frac{\Delta X_e^2}{\Delta X_i} \left[\frac{T_E - T_p}{\Delta X_e} - \frac{T_p - T_w}{\Delta X_w} \right] \text{ if } G_e > 0 \\ &= \frac{\Delta X_e^2}{\Delta X_{i+1}} \left[\frac{T_{EE} - T_e}{\Delta X_{ee}} - \frac{T_E - T_p}{\Delta X_e} \right] \text{ if } G_e < 0 \end{aligned} \quad (3.25)$$

$$\begin{aligned} \text{curv}_w &= \frac{\Delta X_w^2}{\Delta X_{i+1}} \left[\frac{T_p - T_w}{\Delta X_w} - \frac{T_w - T_{ww}}{\Delta X_{ww}} \right] \text{ if } G_w > 0 \\ &= \frac{\Delta X_w^2}{\Delta X_i} \left[\frac{T_E - T_p}{\Delta X_e} - \frac{T_p - T_w}{\Delta X_w} \right] \text{ if } G_w < 0 \end{aligned} \quad (3.26)$$

and

$$\begin{aligned} \Delta X_e &= \frac{1}{2} (\Delta X_i + \Delta X_{i+1}) \\ \Delta X_w &= \frac{1}{2} (\Delta X_i + \Delta X_{i-1}) \\ \Delta X_{ee} &= \frac{1}{2} (\Delta X_{i+1} + \Delta X_{i+2}) \\ \Delta X_{ww} &= \frac{1}{2} (\Delta X_{i-1} + \Delta X_{i-2}) \end{aligned} \quad (3.27)$$

In generalized orthogonal coordinates the convective flux terms become:

$$(\rho C_{pm} u^1 T)_e = G_e C_{pm} \left(\frac{T_p + T_E}{2} - \frac{1}{8} \text{curvn}_e \right) \quad (3.28)$$

$$(\rho C_{pm} u^2 T)_w = G_w C_{pm} \left(\frac{T_p + T_w}{2} - \frac{1}{8} \text{curvn}_w \right) \quad (3.29)$$

where

$$\begin{aligned} \text{curvn}_e &= \frac{(h_1 \Delta \theta^1)_e^2}{(h_1 \Delta \theta^1)_i} \left[\frac{T_E - T_p}{(h_1 \Delta \theta^1)_e} - \frac{T_p - T_w}{(h_1 \Delta \theta^1)_w} \right] \text{ if } G_e > 0 \\ &= \frac{(h_1 \Delta \theta^1)_e^2}{(h_1 \Delta \theta^1)_{i+1}} \left[\frac{T_{EE} - T_E}{(h_1 \Delta \theta^1)_{ee}} - \frac{T_E - T_p}{(h_1 \Delta \theta^1)_e} \right] \text{ if } G_e < 0 \end{aligned} \quad (3.31)$$

and

$$\begin{aligned} (h_1 \Delta \theta^1)_e &= \frac{1}{2} [(h_1 \Delta \theta^1)_i + (h_1 \Delta \theta^1)_{i+1}] \\ (h_1 \Delta \theta^1)_w &= \frac{1}{2} [(h_1 \Delta \theta^1)_i + (h_1 \Delta \theta^1)_{i-1}] \\ (h_1 \Delta \theta^1)_{ee} &= \frac{1}{2} [(h_1 \Delta \theta^1)_{i+1} + (h_1 \Delta \theta^1)_{i+2}] \\ (h_1 \Delta \theta^1)_{ww} &= \frac{1}{2} [(h_1 \Delta \theta^1)_{i-1} + (h_1 \Delta \theta^1)_{i-2}] \end{aligned} \quad (3.32)$$

Equation (3.22) now becomes:

$$\begin{aligned} & [(\rho C_{pm} T)^n - (\rho C_{pm} T)^{n-1}] h_1 \frac{\Delta V}{\Delta t} \\ &= A_E T_E + A_W T_W - A_P T_P + S (h_1 \Delta \theta^1) \end{aligned} \quad (3.33)$$

T_{ee} and T_{ww} are included in the source term using a semi-implicit tri-diagonal solution procedure. For a uniform grid, the other coefficients are:

$$A_E = \frac{C_{pm_e} (-7 G_e + 3 |G_e|)}{16} + C_{pm_w} (-G_w + |G_w|) + \frac{k_e}{h_1 \Delta \theta^1} \quad (3.34)$$

$$A_W = \frac{C_{pm_w} (9 G_w + 3 |G_w|)}{16} + C_{pm_e} (G_e + |G_e|) + \frac{k_w}{h_1 \Delta \theta^1} \quad (3.35)$$

$$A_P = \frac{9}{16} (G_w C_{pm_w} - G_e C_{pm_e}) + 3 (|G_w| C_{pm_w} + G_e) + \frac{k_w + k_e}{h_1 \Delta \theta^1} \quad (3.36)$$

$$S_p = Sh_1 \Delta \theta^1 - C_{pm_e} (|G_e| - G_e) T_{EE} - C_{pm_w} (|G_w| + G_w) T_{WW} \quad (3.37)$$

As mentioned before, Yang [Ref. 12:pp. 82-89] extended the QUICK algorithm to three dimensions. The three dimensional algorithm for generalized orthogonal coordinate system is described below.

As in the one dimensional case, the average temperature of the control volume is determined by interpolation of its neighbors in three directions. For illustration, Figure 3.6 from Raycraft [Ref. 29:pp. 68] shows a simpler uniform rectangular grid. The actual grid is similar except that its cylindrical/spherical geometry is more difficult to show. Yang [Ref. 12] describes how curvature terms are calculated for each of the temperatures and substituted into the convection

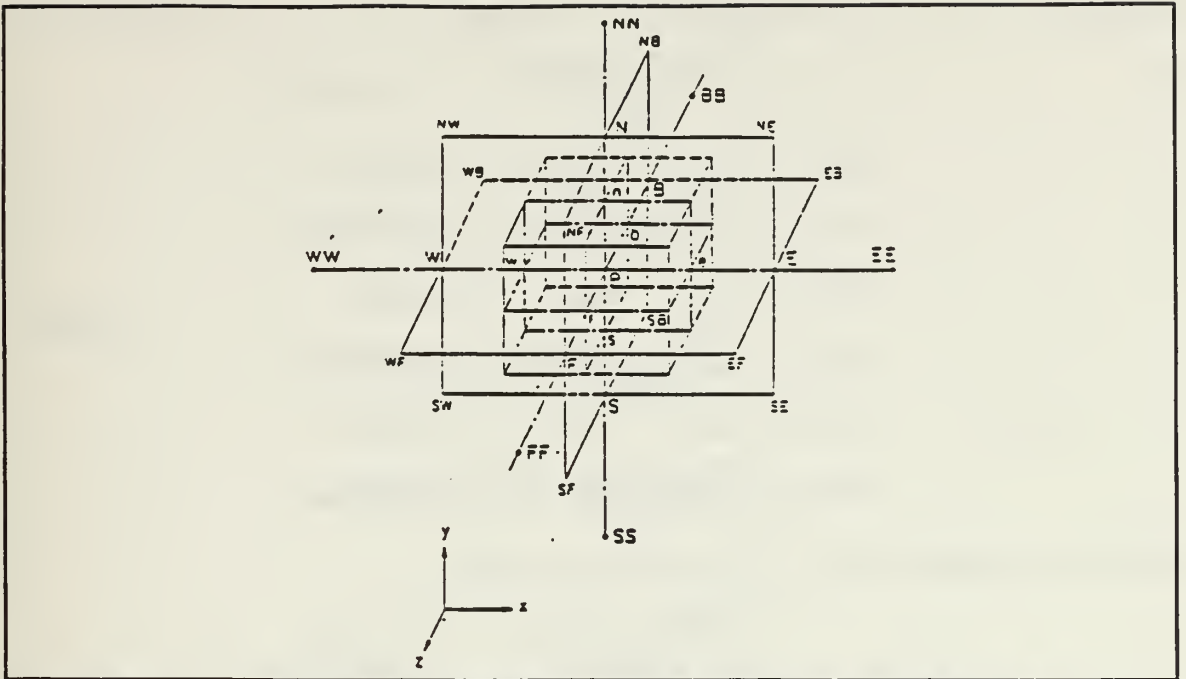


Figure 3.6 Calculation Cells for a Uniform Rectangular Grid.

terms of the energy equation. The new energy equation becomes

$$\begin{aligned}
 & [A_p^T + (\rho C_{pm_p})^{n-1}] \frac{\Delta V}{\Delta t} T_p \\
 & = A_E^T T_E + A_W^T T_W + A_N^T T_N + A_S^T T_S + A_F^T T_F + A_B^T T_B + S_U^T
 \end{aligned} \tag{3.38}$$

where the additional source term S_u^T is:

$$S_u^T = (\rho C_{pm_p})^{n-1} \frac{\Delta V}{\Delta t} - A_{EER} + A_{WNR} + A_{NNR} + A_{SSR} + A_{FFR} + A_{BBR} \tag{3.39}$$

The following terms are part of Equation (3.38). All values are for point (i, j, k) unless specified elsewhere. For = =

example, u_{ijk}^1 is designated u_1^1 whereas, $u_{i+1, j, k}$ is specified u_{i+1} .

$$\begin{aligned}
 CN &= G_n \cdot u_{j+1}^2 \cdot (h_3 \Delta \theta^3)_n \cdot (h_1 \Delta \theta^1)_n \\
 CS &= G_s \cdot u_j^2 \cdot (h_3 \Delta \theta^3)_s \cdot (h_1 \Delta \theta^1)_s \\
 CE &= G_e \cdot u_{i+1}^1 \cdot (h_3 \Delta \theta^3)_e \cdot (h_2 \Delta \theta^2)_e \\
 CW &= G_w \cdot u_i^1 \cdot (h_3 \Delta \theta^3)_w \cdot (h_2 \Delta \theta^2)_w \\
 CF &= G_f \cdot u_{k+1}^3 \cdot (h_1 \Delta \theta^1)_f \cdot (h_2 \Delta \theta^2)_f \\
 CB &= G_b \cdot u_k^3 \cdot (h_1 \Delta \theta^1)_b \cdot (h_2 \Delta \theta^2)_b
 \end{aligned} \tag{3.40}$$

Thermal conductivity is expressed as:

$$\begin{aligned}
 k_n &= \left[\frac{(k_j \cdot (h_2 \Delta \theta^2)_j)^{-1} + (k_{j+1} \cdot (h_2 \Delta \theta^2)_{j+1})^{-1}}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j+1}} \right]^{-1} \\
 k_s &= \left[\frac{(k_j \cdot (h_2 \Delta \theta^2)_j)^{-1} + (k_{j-1} \cdot (h_2 \Delta \theta^2)_{j-1})^{-1}}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j-1}} \right]^{-1} \\
 k_e &= \left[\frac{(k_i \cdot (h_1 \Delta \theta^1)_i)^{-1} + (k_{i+1} \cdot (h_1 \Delta \theta^1)_{i+1})^{-1}}{(h_1 \Delta \theta^1)_i + (h_1 \Delta \theta^1)_{i+1}} \right]^{-1} \\
 k_w &= \left[\frac{(k_i \cdot (h_1 \Delta \theta^1)_i)^{-1} + (k_{i-1} \cdot (h_1 \Delta \theta^1)_{i-1})^{-1}}{(h_1 \Delta \theta^1)_i + (h_1 \Delta \theta^1)_{i-1}} \right]^{-1} \\
 k_f &= \left[\frac{(k_k \cdot (h_3 \Delta \theta^3)_k)^{-1} + (k_{k+1} \cdot (h_3 \Delta \theta^3)_{k+1})^{-1}}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k+1}} \right]^{-1} \\
 k_b &= \left[\frac{(k_k \cdot (h_3 \Delta \theta^3)_k)^{-1} + (k_{k-1} \cdot (h_3 \Delta \theta^3)_{k-1})^{-1}}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k-1}} \right]^{-1}
 \end{aligned} \tag{3.41}$$

$$CONDN1 = k_n \cdot \left[\frac{h_3 \Delta \theta^3 \cdot h_1 \Delta \theta^1}{h_2 \Delta \theta^2} \right]_n$$

$$CONDS1 = k_s \cdot \left[\frac{h_3 \Delta \theta^3 \cdot h_1 \Delta \theta^1}{h_2 \Delta \theta^2} \right]_s$$

$$CONDE1 = k_e \cdot \left[\frac{h_3 \Delta \theta^3 \cdot h_2 \Delta \theta^2}{h_1 \Delta \theta^1} \right]_e$$

(3.42)

$$CONDW1 = k_w \cdot \left[\frac{h_3 \Delta \theta^3 \cdot h_2 \Delta \theta^2}{h_1 \Delta \theta^1} \right]_w$$

$$CONDF1 = k_f \cdot \left[\frac{h_1 \Delta \theta^1 \cdot h_2 \Delta \theta^2}{h_3 \Delta \theta^3} \right]_f$$

$$CONDB1 = k_b \cdot \left[\frac{h_1 \Delta \theta^1 \cdot h_2 \Delta \theta^2}{h_3 \Delta \theta^3} \right]_b$$

$$CEP = \frac{|CE| + CE}{16} \cdot \frac{(h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_i}$$

$$CEM = \frac{|CE| - CE}{16} \cdot \frac{(h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_{i+1}}$$

$$CWP = \frac{|CW| + CW}{16} \cdot \frac{(h_1 \Delta \theta^1)_w}{(h_1 \Delta \theta^1)_{i-1}}$$

$$CWM = \frac{|CW| - CW}{16} \cdot \frac{(h_1 \Delta \theta^1)_w}{(h_1 \Delta \theta^1)_i}$$

$$CNP = \frac{|CN| + CN}{16} \cdot \frac{(h_2 \Delta \theta^2)_n}{(h_2 \Delta \theta^2)_j}$$

$$CNM = \frac{|CN| - CN}{16} \cdot \frac{(h_2 \Delta \theta^2)_n}{(h_2 \Delta \theta^2)_{j+1}}$$

$$CSP = \frac{|CS| + CS}{16} \cdot \frac{(h_2 \Delta \theta^2)_s}{(h_2 \Delta \theta^2)_{j-1}}$$

$$CSM = \frac{|CS| - CS}{16} \cdot \frac{(h_2 \Delta \theta^2)_s}{(h_2 \Delta \theta^2)_j}$$

$$CFP = \frac{|CF| + CF}{16} \cdot \frac{(h_3 \Delta \theta^3)_f}{(h_3 \Delta \theta^3)_k}$$

$$CFM = \frac{|CF| - CF}{16} \cdot \frac{(h_3 \Delta \theta^3)_f}{(h_3 \Delta \theta^3)_{k+1}}$$

$$CBP = \frac{|CB| + CB}{16} \cdot \frac{(h_3 \Delta \theta^3)_b}{(h_3 \Delta \theta^3)_{k-1}}$$

$$CBM = \frac{|CB| - CB}{16} \cdot \frac{(h_3 \Delta \theta^3)_b}{(h_3 \Delta \theta^3)_k}$$

(3.43)

$$\begin{aligned}
A_{EE}^T &= \frac{-CEM \cdot (h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_{ee}} \\
A_{WW}^T &= \frac{-CWP \cdot (h_1 \Delta \theta^1)_w}{(h_1 \Delta \theta^1)_{ww}} \\
A_{NN}^T &= \frac{-CNM \cdot (h_2 \Delta \theta^2)_n}{(h_2 \Delta \theta^2)_{nn}} \\
A_{SS}^T &= \frac{-CSP \cdot (h_2 \Delta \theta^2)_s}{(h_2 \Delta \theta^2)_{ss}} \\
A_{FF}^T &= \frac{-CFM \cdot (h_3 \Delta \theta^3)_f}{(h_3 \Delta \theta^3)_{ff}} \\
A_{BB}^T &= \frac{-CBP \cdot (h_3 \Delta \theta^3)_b}{(h_3 \Delta \theta^3)_{bb}}
\end{aligned} \tag{3.44}$$

Final coefficients for the source term are:

$$\begin{aligned}
A_{EER} &= A_{EE}^T \cdot T_{1+2} \cdot C_{pm_{1+1}} \\
A_{WNR} &= A_{WW}^T \cdot T_{1-2} \cdot C_{pm_{1-2}} \\
A_{NNR} &= A_{NN}^T \cdot T_{j+2} \cdot C_{pm_{j+2}} \\
A_{SSR} &= A_{SS}^T \cdot T_{j-2} \cdot C_{pm_{j-2}} \\
A_{FFR} &= A_{FF}^T \cdot T_{k+2} \cdot C_{pm_{k+2}} \\
A_{BBR} &= A_{BB}^T \cdot T_{k-2} \cdot C_{pm_{k-2}}
\end{aligned} \tag{3.45}$$

Intermediate coefficients are:

$$A_{EI} = -\frac{1}{2} \cdot CE + CEP + CEM$$

$$\cdot \left[1 + \frac{(h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_{ee}} \right] + CWM \cdot \left[\frac{(h_1 \Delta \theta^1)_w}{(h_1 \Delta \theta^1)_e} \right] \quad (3.46)$$

$$A_{WI} = \frac{1}{2} \cdot CW + CWM + CWP$$

$$\cdot \left[1 + \frac{(h_1 \Delta \theta^1)_w}{(h_1 \Delta \theta^1)_{ww}} \right] + CEP \cdot \left[\frac{(h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_w} \right] \quad (3.47)$$

$$A_{NI} = -\frac{1}{2} \cdot CN + CNP + CNM$$

$$\cdot \left[1 + \frac{(h_2 \Delta \theta^2)_n}{(h_2 \Delta \theta^2)_{nn}} \right] + CEP \cdot \left[\frac{(h_2 \Delta \theta^2)_s}{(h_2 \Delta \theta^2)_n} \right] \quad (3.48)$$

$$A_{SI} = \frac{1}{2} \cdot CS + CSM + CSP$$

$$\cdot \left[1 + \frac{(h_2 \Delta \theta^2)_s}{(h_2 \Delta \theta^2)_{ss}} \right] + CNP \cdot \left[\frac{(h_2 \Delta \theta^2)_n}{(h_2 \Delta \theta^2)_s} \right] \quad (3.49)$$

$$A_{FI} = -\frac{1}{2} \cdot CF + CFP + CFM$$

$$\cdot \left[1 + \frac{(h_3 \Delta \theta^3)_f}{(h_3 \Delta \theta^3)_{ff}} \right] + CBM \cdot \left[\frac{(h_3 \Delta \theta^3)_b}{(h_3 \Delta \theta^3)_f} \right] \quad (3.50)$$

$$A_{BI} = \frac{1}{2} \cdot CB + CBM + CBP$$

$$\cdot \left[1 + \frac{(h_3 \Delta \theta^3)_b}{(h_3 \Delta \theta^3)_{bb}} \right] + CFP \cdot \left[\frac{(h_3 \Delta \theta^3)_f}{(h_3 \Delta \theta^3)_b} \right] \quad (3.51)$$

Final coefficients are:

$$\begin{aligned}
 A_E^T &= A_{EI} \cdot C_{pm_e} + CONDE1 \\
 A_W^T &= A_{WI} \cdot C_{pm_w} + CONDW1 \\
 A_N^T &= A_{NI} \cdot C_{pm_n} + CONDN1 \\
 A_S^T &= A_{SI} \cdot C_{pm_s} + CONDS1 \\
 A_F^T &= A_{FI} \cdot C_{pm_f} + CONDF1 \\
 A_B^T &= A_{BI} \cdot C_{pm_b} + CONDB1
 \end{aligned}
 \tag{3.52}$$

and:

$$\begin{aligned}
 A_P^T &= C_{pm_p} \cdot (A_E^T + A_W^T + A_N^T + A_S^T + A_F^T + A_B^T \\
 &+ A_{EE}^T + A_{WW}^T + A_{NN}^T + A_{SS}^T + A_{FF}^T + A_{BB}^T) + CONDE1 \\
 &+ CONDW1 + CONDN1 + CONDS1 + CONDF1 + CONDB1
 \end{aligned}
 \tag{3.53}$$

F. DISCRETIZATION OF THE MOMENTUM EQUATION

The integrated momentum equation is:

$$\begin{aligned}
 (\rho u^i)_t V + M_e^{i1} A_e - M_w^{i1} A_w + M_n^{i2} A_n \\
 - M_s^{i2} A_s + M_f^{i3} A_f - M_b^{i3} A_b = S^i
 \end{aligned}
 \tag{3.54}$$

where A_i are the face areas of the staggered cell given by Equations (3.14 - 3.16). M^{ij} is the momentum flux in the θ^{ij} direction due to velocity u^i convection and to diffusion, and is given by:

$$M^{ij} = (\rho u^i u^j - \sigma_i^j)
 \tag{3.55}$$

Included in the source term S^i are pressure gradient, body, coriolis and centrifugal forces. The source term for velocity u^i is:

$$S^i = -P_e A_e + P_w A_w + \rho G^i \Delta V - M_p^{i2} (A_n - A_s) - M_p^{i3} (A_f - A_b) + (M_p^{22} + M_p^{33}) (A_e + A_w) \quad (3.56)$$

Yang, et al. [Ref. 19:pp. 11-13] describe a "stress flux formation" as it applies to a curvilinear coordinate system. Stresses are evaluated from previous information and the source is given in the current information. The momentum flux is:

$$M^{ij} = \hat{M}^{ij} + (\sigma_i^j - \sigma_j^i) \quad (3.57)$$

where:

$$\sigma_i^j = \frac{\mu}{\left[h_j \left(\frac{\partial u^i}{\partial \theta^j} \right) \right]} \quad (3.58)$$

$$\hat{M}^{ij} = \rho u^i u^j - \sigma_i^j \quad (3.59)$$

The momentum equation for velocity u^i is now:

$$(\rho u)_t + \hat{M}_e^{11} A_e - \hat{M}_w^{11} A_w + \hat{M}_n^{12} A_n - \hat{M}_s^{12} A_s + \hat{M}_f^{13} A_f + \hat{M}_b^{13} A_b = \hat{S} \quad (3.60)$$

where:

$$\begin{aligned} \hat{S} = S - (\sigma_1^i - \sigma_i^1)_e A_e + (\sigma_1^i - \sigma_i^1)_w A_w - (\sigma_1^2 - \sigma_2^1)_n A_n \\ + (\sigma_1^2 - \sigma_2^1)_s A_s - (\sigma_1^3 - \sigma_3^1)_f A_f - (\sigma_1^3 - \sigma_3^1)_b A_b \end{aligned} \quad (3.61)$$

The momentum equation for θ^1 takes a form similar to the energy equation

$$\left(A_p^{u^1} + \rho^{n-1} \frac{\Delta V}{\Delta t} \right) u_p^2 = A_e^{u^1} u_e^1 + A_w^{u^1} u_w^1 + A_n^{u^1} u_n^1 + A_s^{u^1} u_s^1 + A_f^{u^1} u_f^1 + A_b^{u^1} u_b^1 + S^{u^1} u^1 \quad (3.62)$$

Again we must obtain final coefficients. Introducing intermediate mass flow rate per unit area:

$$\begin{aligned} G_{ne} &= u_{j+1}^2 \left\{ \frac{[\rho_{j+1} (h_2 \Delta \theta^2)_j + \rho_j (h_2 \Delta \theta^2)_{j+1}]}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j+1}} \right\} \\ G_{nw} &= u_{i-1, j+1}^2 \left\{ \frac{[\rho_{i-1, j+1} (h_2 \Delta \theta^2)_j + \rho_{i-1} (h_2 \Delta \theta^2)_{j+1}]}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j+1}} \right\} \\ G_{se} &= u^2 \left\{ \frac{[\rho_{j-1} (h_2 \Delta \theta^2)_j + \rho_j (h_2 \Delta \theta^2)_{j-1}]}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j+1}} \right\} \\ G_{sw} &= u_{i-1}^2 \left\{ \frac{[\rho_{i-1, j-1} (h_2 \Delta \theta^2)_j + \rho_{i-1} (h_2 \Delta \theta^2)_{j-1}]}{(h_2 \Delta \theta^2)_j + (h_2 \Delta \theta^2)_{j-1}} \right\} \\ G_e &= u_{i+1}^1 \left\{ \frac{[\rho_{i+1} (h_1 \Delta \theta^1)_e + \rho_i (h_1 \Delta \theta^2)_{ee}]}{(h_1 \Delta \theta^1)_e + (h_1 \Delta \theta^1)_{ee}} \right\} \end{aligned} \quad (3.63a)$$

$$\begin{aligned}
G_p &= u_i \left\{ \frac{[\rho_{i-1} (h_1 \Delta \theta^1)_e + \rho_i (h_1 \Delta \theta^1)_w]}{(h_1 \Delta \theta^1)_e + (h_1 \Delta \theta^1)_w} \right\} \\
G_w &= u_{i-1}^1 \left\{ \frac{[\rho_{i-2} (h_1 \Delta \theta^1)_w + \rho_{i-1} (h_1 \Delta \theta^1)_{ww}]}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_{ww}} \right\} \\
G_{fe} &= u_{k+1}^3 \left\{ \frac{[\rho_{k+1} (h_3 \Delta \theta^3)_k + \rho_k (h_3 \Delta \theta^3)_{k+1}]}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k+1}} \right\} \\
G_{fw} &= u_{i-1, k+1}^3 \left\{ \frac{[\rho_{i-1, k+1} (h_3 \Delta \theta^3)_k + \rho_{i-1} (h_3 \Delta \theta^3)_{k+1}]}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k+1}} \right\} \\
G_{be} &= u^3 \left\{ \frac{[\rho_{k-1} (h_3 \Delta \theta^3)_k + \rho_k (h_3 \Delta \theta^3)_{k-1}]}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k-1}} \right\} \\
G_{bw} &= u_{i-1}^3 \left\{ \frac{[\rho_{i-1, k-1} (h_3 \Delta \theta^3)_k + \rho_{i-1} (h_3 \Delta \theta^3)_{k-1}]}{(h_3 \Delta \theta^3)_k + (h_3 \Delta \theta^3)_{k-1}} \right\}
\end{aligned} \tag{3.63b}$$

Final mass flow rates are:

$$\begin{aligned}
CE &= \frac{1}{2} (G_e + G_p) \cdot (h_2 \Delta \theta^2)_e \cdot (h_3 \Delta \theta^3)_e \\
CW &= \frac{1}{2} (G_p + G_w) \cdot (h_2 \Delta \theta^2)_w \cdot (h_3 \Delta \theta^3)_w \\
CN &= (h_1 \Delta \theta^1)_n \cdot (h_3 \Delta \theta^3)_n \cdot \left\{ \frac{[G_{ne} (h_1 \Delta \theta^1)_w + G_{nw} (h_1 \Delta \theta^1)_e]}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e} \right\} \\
CS &= (h_1 \Delta \theta^1)_s \cdot (h_3 \Delta \theta^3)_s \cdot \left\{ \frac{[G_{se} (h_1 \Delta \theta^1)_w + G_{sw} (h_1 \Delta \theta^1)_e]}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e} \right\} \\
CF &= (h_1 \Delta \theta^1)_f \cdot (h_2 \Delta \theta^2)_f \cdot \left\{ \frac{[G_{fe} (h_1 \Delta \theta^1)_w + G_{fw} (h_1 \Delta \theta^1)_e]}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e} \right\} \\
CB &= (h_1 \Delta \theta^1)_b \cdot (h_2 \Delta \theta^2)_b \cdot \left\{ \frac{[G_{be} (h_1 \Delta \theta^1)_w + G_{bw} (h_1 \Delta \theta^1)_e]}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e} \right\}
\end{aligned} \tag{3.64}$$

The local viscosity is:

$$\begin{aligned}
 VIS_e &= VIS \\
 VIS_w &= VIS_{i-1} \\
 VIS_n &= \frac{(VIS_{j+1} + VIS + VIS_{i-1, j+1} + VIS_{i-1})}{4} \\
 VIS_s &= \frac{(VIS_{j-1} + VIS + VIS_{i-1, j-1} + VIS_{i-1})}{4} \\
 VIS_f &= \frac{(VIS_{k+1} + VIS + VIS_{i-1, k+1} + VIS_{i-1})}{4} \\
 VIS_b &= \frac{(VIS_{k-1} + VIS + VIS_{i-1, k-1} + VIS_{i-1})}{4}
 \end{aligned} \tag{3.65}$$

$$\begin{aligned}
 VISN1 &= VIS_n \cdot \left[\frac{(h_3 \Delta \theta^3) (h_1 \Delta \theta^1)}{(h_2 \Delta \theta^2)} \right]_n \\
 VISS1 &= VIS_s \cdot \left[\frac{(h_3 \Delta \theta^3) (h_1 \Delta \theta^1)}{(h_2 \Delta \theta^2)} \right]_s \\
 VISE1 &= VIS_e \cdot \left[\frac{(h_2 \Delta \theta^2) (h_3 \Delta \theta^3)}{(h_1 \Delta \theta^1)} \right]_e \\
 VISW1 &= VIS_w \cdot \left[\frac{(h_2 \Delta \theta^2) (h_3 \Delta \theta^3)}{(h_1 \Delta \theta^1)} \right]_w \\
 VISF1 &= VIS_f \cdot \left[\frac{(h_1 \Delta \theta^1) (h_2 \Delta \theta^2)}{(h_3 \Delta \theta^3)} \right]_f \\
 VISB1 &= VIS_b \cdot \left[\frac{(h_1 \Delta \theta^1) (h_2 \Delta \theta^2)}{(h_3 \Delta \theta^3)} \right]_b
 \end{aligned} \tag{3.66}$$

The momentum equation coefficients are:

$$\begin{aligned}
 A_{EER} &= A_{EE}^u \cdot u_{i+1}^i \\
 A_{WWR} &= A_{WW}^u \cdot u_{i-2}^i \\
 A_{NNR} &= A_{NN}^u \cdot u_{j+2}^i \\
 A_{SSR} &= A_{SS}^u \cdot u_{j-2}^1 \\
 A_{FFR} &= A_{FF}^u \cdot u_{k+2}^1 \\
 A_{BBR} &= A_{BB}^u \cdot u_{k-2}^1
 \end{aligned}
 \tag{3.67}$$

As with the energy equation, the value of the final coefficients are:

$$\begin{aligned}
 A_E^u &= A_{EI} + VISE1 \\
 A_W^u &= A_{WI} + VISW1 \\
 A_N^u &= A_{NI} + VISN1 \\
 A_S^u &= A_{SI} + VISS1 \\
 A_F^u &= A_{FI} + VISF1 \\
 A_B^u &= A_{BI} + VISB1
 \end{aligned}
 \tag{3.68}$$

and

$$\begin{aligned}
 A_p^u &= A_E^u + A_W^u + A_N^u + A_S^u + A_F^u + A_B^u \\
 &\quad + A_{EE}^u + A_{WW}^u + A_{NN}^u + A_{SS}^u + A_{FF}^u + A_{BB}^u
 \end{aligned}
 \tag{3.69}$$

The final source term is given as

$$\begin{aligned}
S_u^u = & \frac{[\rho (h_1 \Delta \theta^1)_w + \rho_{i-1} (h_1 \Delta \theta^1)_e]}{[(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e]} \cdot \frac{\Delta V}{\Delta t} \cdot u^1 \\
& + (h_2 \Delta \theta^2)_j (h_3 \Delta \theta^3)_k (P_{i-1} - P_i) + A_{EER} + A_{WWR} + A_{NNR} \\
& + A_{SSR} + A_{FFR} + A_{BBR} + RE - RW + RN - RS \\
& + RF - RB + RRY + RRZ - RRX - BUOY \\
& \cdot \{ \sin [ZC(K)] \cdot (\rho - \rho_{eq}) \cdot (h_1 \Delta \theta^1)_w \\
& \cdot \cos [XC(I)] \} + \{ (\rho_{i-1} - \rho_{eq,i-1}) (h_1 \Delta \theta^1)_e \\
& \cdot \cos [XC(I-1)] \} / [(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e] \Delta V
\end{aligned} \tag{3.70}$$

where XC and ZC represent the center of the cell. The remainder of the terms are explained below.

$$\begin{aligned}
RE &= (h_2 \Delta \theta^2)_e (h_3 \Delta \theta^3)_e \cdot \left[\frac{\sigma^{11} - (u_{i+1}^1 - u_i^1) \cdot VIS_e}{(h_1 \Delta \theta^1)_e} \right] \\
RW &= (h_2 \Delta \theta^2)_w (h_3 \Delta \theta^3)_w \cdot \left[\frac{\sigma_{i-1}^{11} - (u^1 - u_{i-1}^1) \cdot VIS_w}{(h_1 \Delta \theta^1)_w} \right] \\
RN &= (h_1 \Delta \theta^1)_n (h_3 \Delta \theta^3)_n \cdot \left[\frac{\sigma_{j+1}^{12} - (u_{j+1}^1 - u_j^1) \cdot VIS_n}{(h_2 \Delta \theta^2)_n} \right] \\
RS &= (h_1 \Delta \theta^1)_s (h_3 \Delta \theta^3)_s \cdot \left[\frac{\sigma^{12} - (u^1 - u_{j-1}^1) \cdot VIS_s}{(h_2 \Delta \theta^2)_s} \right] \\
RF &= (h_1 \Delta \theta^1)_f (h_2 \Delta \theta^2)_f \cdot \left[\frac{\sigma_{k+1}^{13} - (u_{k+1}^1 - u_k^1) \cdot VIS_f}{(h_3 \Delta \theta^3)_f} \right] \\
RB &= (h_1 \Delta \theta^1)_b (h_2 \Delta \theta^2)_b \cdot \left[\frac{\sigma^{13} - (u^1 - u_{k-1}^1) \cdot VIS_b}{(h_3 \Delta \theta^3)_b} \right]
\end{aligned} \tag{3.71}$$

$$\bar{\sigma}^{12} = \frac{1}{2} (\sigma_{j+1}^{12} + \sigma_j^{12})$$

$$\bar{\sigma}^{13} = \frac{1}{2} (\sigma_{k+1}^{13} + \sigma_k^{13})$$

$$\bar{\sigma}^{22} = \frac{\sigma^{22} (h_1 \Delta \theta^1)_w + \sigma_{i-1}^{22} (h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e} \quad (3.72)$$

$$\bar{\sigma}^{33} = \frac{\sigma^{33} (h_1 \Delta \theta^1)_w + \sigma_{i-1}^{33} (h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e}$$

$$AU1 = u^1$$

$$\begin{aligned} AU2 = & \left\{ \left[\frac{u_{j+1}^2 (h_2 \Delta \theta^2)_j + u_j^2 (h_2 \Delta \theta^2)_j}{2 (h_2 \Delta \theta^2)_j} \right] (h_1 \Delta \theta^1)_w \right. \\ & + \left[\frac{u_{i-1, j+1}^2 (h_2 \Delta \theta^2)_j + u_{i-1}^2 (h_2 \Delta \theta^2)_j}{2 (h_2 \Delta \theta^2)_j} \right] (h_1 \Delta \theta^1)_e \Big\} \\ & / [(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e] \end{aligned} \quad (3.73)$$

$$\begin{aligned} AU3 = & \left\{ \left[\frac{u_{k+1}^3 (h_3 \Delta \theta^3)_k + u_k^3 (h_3 \Delta \theta^3)_k}{2 (h_3 \Delta \theta^3)_k} \right] (h_1 \Delta \theta^1)_w \right. \\ & + \left[\frac{u_{i-1, k+1}^3 (h_3 \Delta \theta^3)_k + u_{i-1}^3 (h_3 \Delta \theta^3)_k}{2 (h_3 \Delta \theta^3)_k} \right] (h_1 \Delta \theta^1)_e \Big\} \\ & / [(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e] \end{aligned}$$

$$AR = \frac{\rho (h_1 \Delta \theta^1)_w + \rho_{i-1} (h_1 \Delta \theta^1)_e}{(h_1 \Delta \theta^1)_w + (h_1 \Delta \theta^1)_e}$$

$$ARU12 = AR \cdot AU1 \cdot AU2 \quad (3.74)$$

$$ARU13 = AR \cdot AU1 \cdot AU3$$

$$ARU22 = AR \cdot AU2 \cdot AU2$$

$$ARU33 = AR \cdot AU3 \cdot AU3$$

$$\begin{aligned}
RRY &= (\bar{\sigma}^{12} - ARU12) (h_3 \Delta \theta^3)_k [(h_1 \Delta \theta^1)_n - (h_1 \Delta \theta^1)_s] \\
RRZ &= (\bar{\sigma}^{13} - ARU13) (h_2 \Delta \theta^2)_j [(h_1 \Delta \theta^1)_f - (h_1 \Delta \theta^1)_b] \\
RRX &= (\bar{\sigma}^{22} - AUR22) (h_3 \Delta \theta^3)_k [(h_2 \Delta \theta^2)_e - (h_2 \Delta \theta^2)_w] \\
&\quad + (\bar{\sigma}^{33} - AUR33) (h_2 \Delta \theta^2)_j [(h_3 \Delta \theta^3)_e - (h_3 \Delta \theta^3)_w]
\end{aligned} \tag{3.75}$$

Similarly, momentum equations for the other two directions may be obtained but are omitted for brevity.

G. PRESSURE CORRECTION

In the finite difference scheme, energy and momentum equations are used to solve for temperature and velocities. The equation of state and continuity are used to solve for density and pressure. Doria [Ref. 35] states that pressure is only weakly coupled to the equation of state. Therefore, updated temperatures and pressures determine density in the equation of state and continuity is used to correct pressure across each cell.

As discussed earlier, a disadvantage of using primitive variables is the difficulty in calculating pressure. Two corrections must be applied. First, a global pressure correction accounts for changes in net energy of the closed system. Second, a local pressure correction accounts for pressure changes causing the velocity field.

1. Global Pressure Correction

Nicolette, et al. [Ref. 3] developed a correction scheme for a two dimensional square enclosure. Raycraft [Ref.

30] modified it to fit the geometry of Fire-1. In a constant mass and volume system, the overall pressure depends on the addition or removal of energy. In such a system, the sum of all the cells' computed density times its volume is equal to a constant total mass. At any time during a run the mass must equal the total mass at equilibrium. Summing over N cells:

$$\sum \rho_i^n (\Delta V)_i = \sum \rho_{EQ_i} (\Delta V) \quad (3.76)$$

where n is the n^{th} time step and the EQ subscript indicates the equilibrium point. Assuming that air is an ideal gas, its density is a function of temperature and pressure only. The actual values of both consist of the estimate and the global correction:

$$P = P^* + P'_g \quad (3.77)$$

$$T = T^* + T'_g \quad (3.78)$$

where P^* and T^* are the estimates and P'_g and T'_g are the global corrections using the ideal gas law and Equation (3.76). The global pressure correction becomes

$$P'_g = \frac{\sum P_{EQ} \left(\frac{\Delta V}{T_i} - \frac{\Delta V}{T^*} \right) - \sum \left(P^* \frac{\Delta V}{T^*} \right)}{\sum \frac{\Delta V}{T^*}} \quad (3.79)$$

Mass is conserved for each cell when an accurate final pressure is obtained.

2. Local Pressure Correction

Patanker [Ref. 36:pp. 120-126] and Doria [Ref. 36:pp. 26-32] developed a procedure for obtaining the local pressure correction. As in the global correction scheme, a pressure field is estimated from the previous time step. Velocities are calculated according to this pressure distribution and the law of continuity is applied to each cell. If the residual mass term S_{mp} approaches zero, then the estimated pressure field is satisfactory. If not, a local correction is calculated and applied to the original estimate. The new pressure field is used to compute a corrected velocity field and the residual mass S_{mp} is rechecked. The process repeats itself until S_{mp} is an acceptably small value. As in the global correction, the actual local pressure is:

$$P = P^* + P' \quad (3.80)$$

where P^* is again the estimate, usually the pressure of the preceding iteration, and P' is the local correction. Putting this correction in typical finite difference form:

$$A_p P'_p = A_E P'_E + A_W P'_W + A_N P'_N + A_S P'_S + A_F P'_F + A_B P'_B - S_{mp} \Delta V \quad (3.81)$$

where:

$$\begin{aligned}
 A_E &= \frac{\rho_e \cdot [(h_2 \Delta \theta^2) (h_3 \Delta \theta^3)]_e^2}{\left[A_{p_{e+1}}^{u1} + \rho_e \frac{\Delta V}{\Delta t} \right]} \\
 A_W &= \frac{\rho_w \cdot [(h_2 \Delta \theta^2) (h_3 \Delta \theta^3)]_w^2}{\left[A_p^{u1} + \rho_w \frac{\Delta V}{\Delta t} \right]} \\
 A_N &= \frac{\rho_n \cdot [(h_1 \Delta \theta^1) (h_3 \Delta \theta^3)]_n^2}{\left[A_{p_{n+1}}^{u2} + \rho_n \frac{\Delta V}{\Delta t} \right]} \\
 A_S &= \frac{\rho_s \cdot [(h_1 \Delta \theta^1) (h_3 \Delta \theta^3)]_s^2}{\left[A_p^{u2} + \rho_s \frac{\Delta V}{\Delta t} \right]} \\
 A_F &= \frac{\rho_f \cdot [(h_1 \Delta \theta^1) (h_2 \Delta \theta^2)]_f^2}{\left[A_{p_{f+1}}^{u3} + \rho_f \frac{\Delta V}{\Delta t} \right]} \\
 A_B &= \frac{\rho_b \cdot [(h_1 \Delta \theta^1) (h_2 \Delta \theta^2)]_b^2}{\left[A_p^{u3} + \rho_b \frac{\Delta V}{\Delta t} \right]} \\
 A_p &= A_E + A_W + A_N + A_S + A_F + A_B
 \end{aligned} \tag{3.82}$$

Corrected velocities are:

$$\begin{aligned}
 u^1 &= u^{1*} + u^{1'} \\
 u^2 &= u^{2*} + u^{2'} \\
 u^3 &= u^{3*} + u^{3'}
 \end{aligned} \tag{3.83}$$

where:

$$\begin{aligned}
 u^{1'} &= \frac{(P_p + P_w) (h_2 \Delta \theta^2) (h_3 \Delta \theta^3)}{\left(A_p^{u1} + \rho_w \frac{\Delta V}{\Delta t} \right)} \\
 u^{2'} &= \frac{(P_p + P_s) (h_1 \Delta \theta^1) (h_3 \Delta \theta^3)}{\left(A_p^{u2} + \rho_s \frac{\Delta V}{\Delta t} \right)} \\
 u^{3'} &= \frac{(P_p + P_b) (h_1 \Delta \theta^1) (h_2 \Delta \theta^2)}{\left(A_p^{u3} + \rho_b \frac{\Delta V}{\Delta t} \right)}
 \end{aligned} \tag{3.84}$$

Again S_{mp} is computed using continuity. If the residual mass is within a satisfactory range, the calculation is finished. If not, another iteration takes place.

IV. NUMERICAL PROCESS

A. INTRODUCTION

Temperature, velocity, pressure and density fields are produced by the code. Input parameters are initial conditions, fuel heat release rate, fire location, geometry and material characteristics such as fluid properties, wall properties and the external heat transfer coefficient. These are listed in Table 4.1.

TABLE 4.1 MODEL PARAMETERS

WALL CHARACTERISTICS	
Material	ASTM 285 Grade C Steel
Thickness	3/8 inch
Specific Heat	0.1 BTU/ (lbm•F)
Thermal Conductivity	25 BTU/(hr•ft•F)
Density	487 lbm/ft ³
External Heat Transfer Coefficient	15.0 BTU/(hr•ft ² •F)
FIRE CHARACTERISTICS	
Burn Rate	Function provided in program
Initial Temperature	35.6°C
Initial Pressure	1.0 ATM
Location of Fire	Center of Fire-1 23.1 ft. from each endcap 3.21 ft. from bottom

Figures 4.1 and 4.2 show the spherical/cylindrical grid used by the model. Endcaps are spherical with θ , R , and ϕ

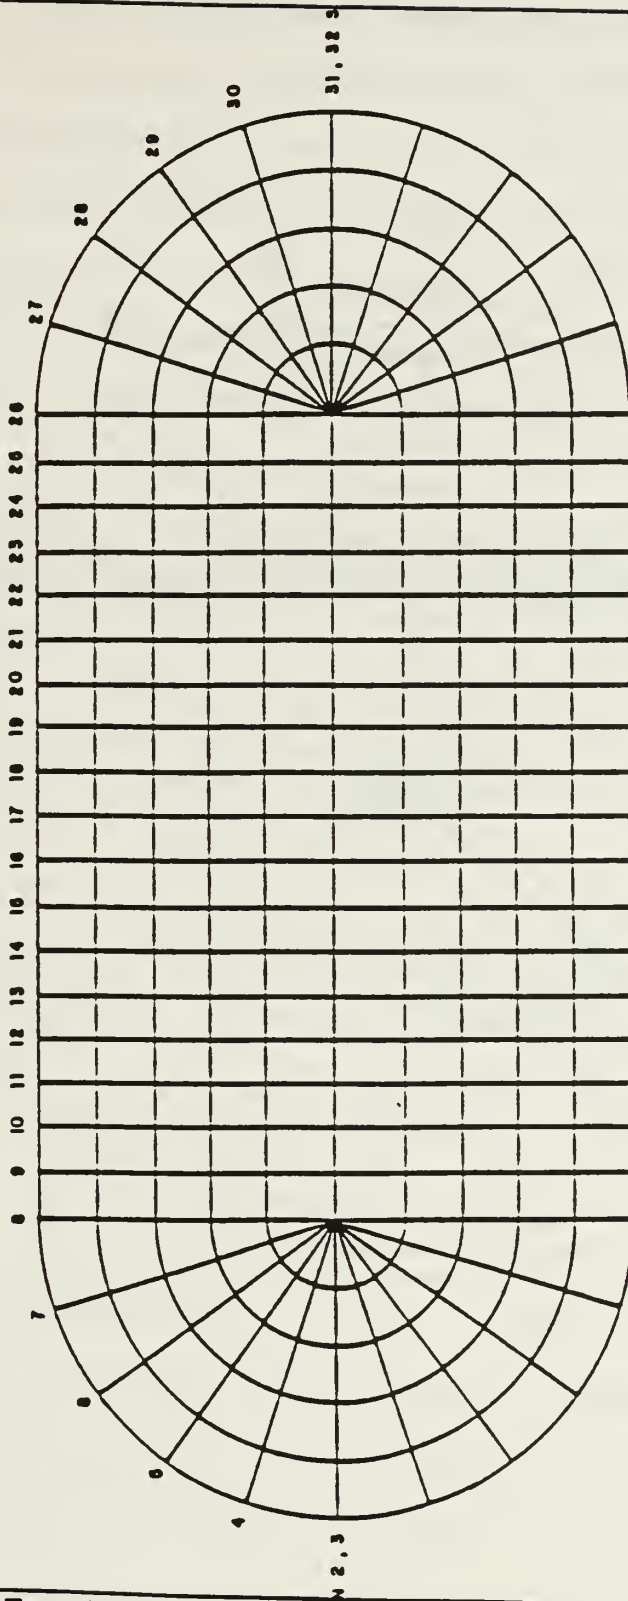


Figure 4.1 Front View of Computer Model (YZ-Plane)

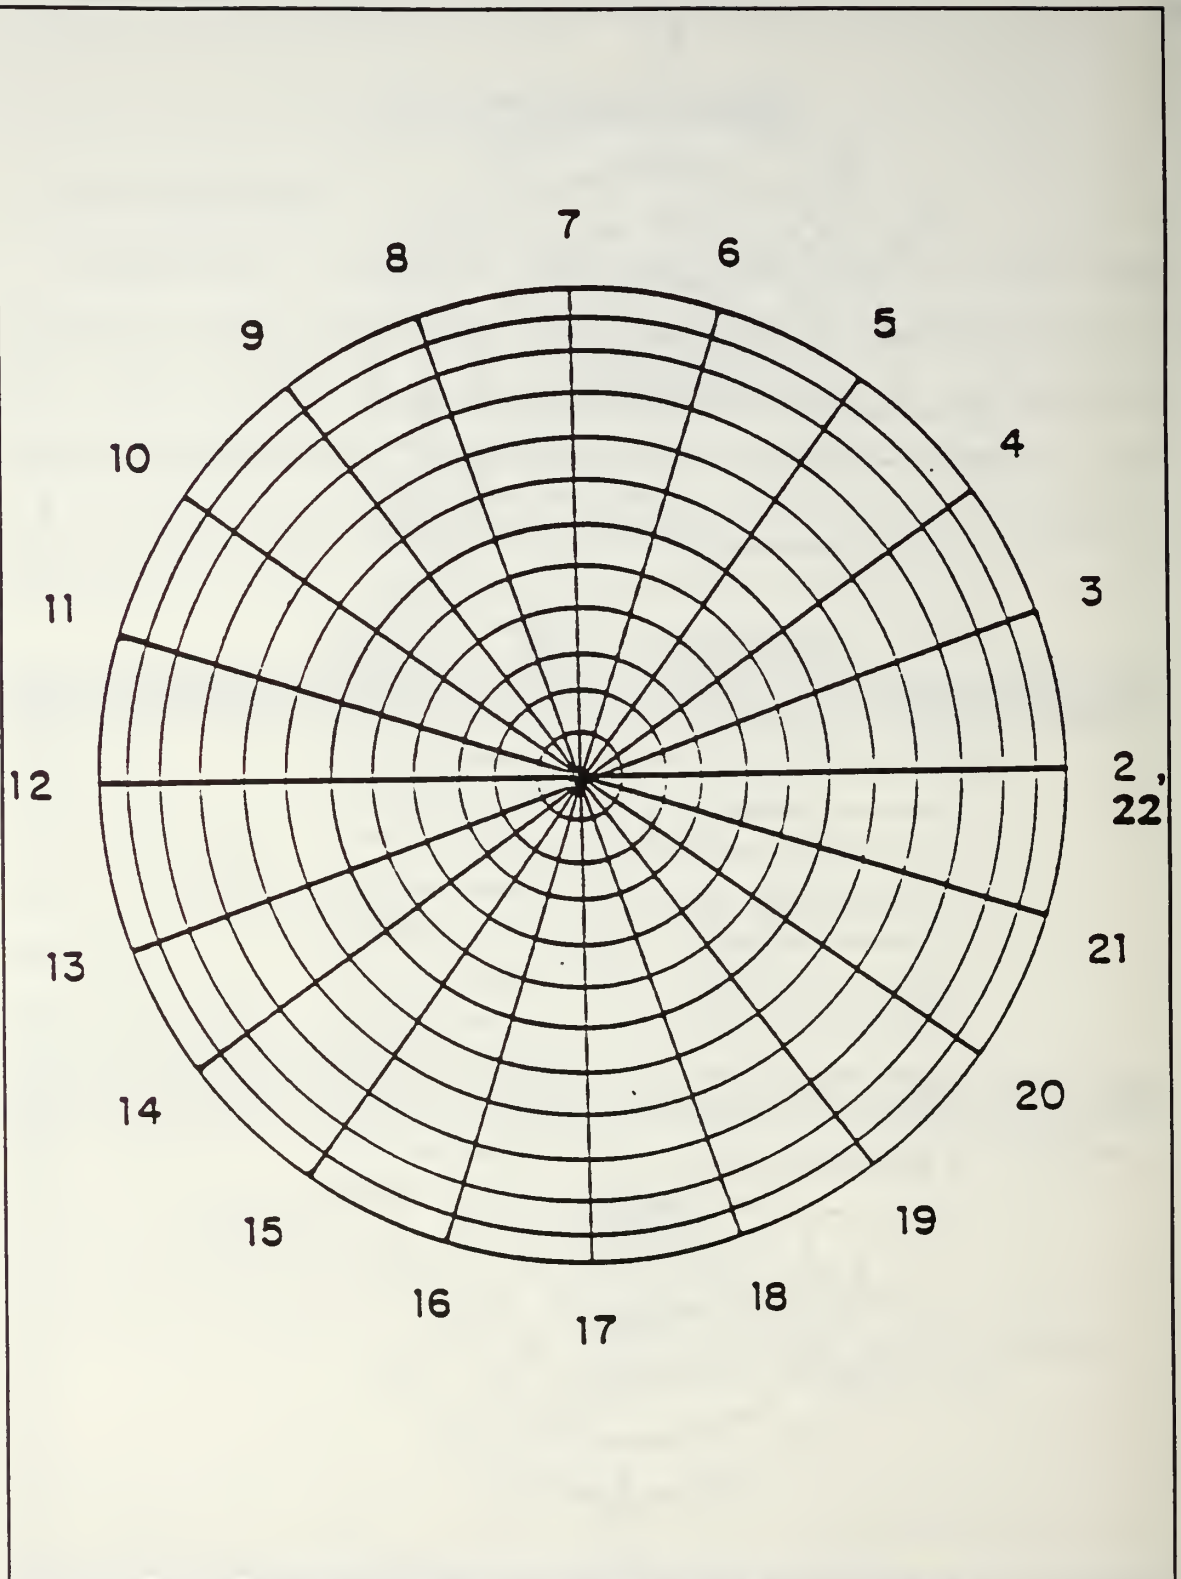


Figure 4.2 Side View of Computer Model (XY-Plane)

directions. The cylindrical midsection have θ , R and Z directions. There are 14 cells in the R direction, one at R=0 for avoiding singularity and one used as the vessel wall. There are 20 cells oriented clockwise in the θ direction. Each endcap has six cells in the ϕ direction with a cell again at zero to avoid singularity. The midsection has 18 cells in the Z direction (ϕ is used for simplicity). Table 4.2 gives information on grid parameters.

TABLE 4.2 ADDITIONAL MODEL PARAMETERS

GRID	
Number of interior cells	6,720
Number of wall cells	560
Number of wall radiation zones	560
Number of fire radiation zones	19
Number of cells in R direction	14
Number of cells in θ direction	20
Number of cells in ϕ direction (per endcap)	6
Number of cells in Z direction (midsection)	18
Time step	0.0288 sec
VAXSTATION 3100 CPU time (1 CPU hour)	0.8-1.0 sec
	Fire Time

B. SOLUTION PROCESS

The model contains two separate programs. The first authored by Raycraft [Ref. 29] calculates the view factors for surface radiation. It produces a matrix of view factors. It is

used only once and its values are stored for use whenever called by the second program.

As described by Nies [Ref. 27], Raycraft [Ref. 29] and Houck [Ref. 30], the main program uses finite difference methods described previously to establish temperature, velocity, pressure and density fields. Initial parameters and the view factors are first read into the program. Geometry of the grid is then calculated and the fields are set to initial conditions. Next, effective viscosity is computed in subroutine CALVIS. Every two time steps, surface radiation flux is recalculated in subroutine RADHT. Subroutines CALT, GLOBE, CALU, CALX, CALW and CALP calculate temperature, the global pressure correction, the velocities and the local pressure correction. Using the corrected velocities, continuity is applied to each cell. If the residual mass RESORM is greater than 10.0 the program is unstable and stops. A smaller time step must be used. If RESORM is greater than a set tolerance level then the program iterates solution by recalculating velocities and pressures. Iterations continue until 1) RESORM is below tolerance levels, solution is reached and the program proceeds to next time step; 2) the maximum number of iterations is reached, or 3) RESORM is greater than 10.0 and the program is stopped.

C. GRAPHICAL ANALYSIS

The use of CA-DISSPLA™ [Ref. 31] has posed some difficult problems. The output from the computer model is in the spherical/cylindrical coordinate system created to simulate Fire-1. This output must be converted to cartesian coordinates in order to be manipulated by CA-DISSPLA™. Even after the conversion is completed the resulting irregularly spaced grid must be interpolated into a regularly spaced grid.

After some experimentation with grid interpolation schemes, a group of CA-DISSPLA™ subroutines are used to create a regularly spaced matrix. These subroutines interpolate values from a set number of neighbors. Care must be taken in choosing a grid size to ensure distortion of the field values does not occur and to ensure that the software will not zero data points with few close neighbors. A relatively course grid has been chosen (50 x 50 x 100) for graphics output. New data points created outside the enclosure have been set to ambient values to minimize distortion at the boundaries.

The VAXSTATION 3100 has proven to be an excellent machine. It has good numerical speed coupled with very sharp graphics capabilities. Future research of this numerical model has been greatly enhanced by the incorporation of this workstation.

The following figures are temperature and velocity profiles for times of 30, 60, and 90 seconds. They are two dimensional images of three dimensional phenomena. Each figure, whether temperature or velocity, presents an axial view (XY-plane) of the tank at the midplane and a longitudinal view (YZ-plane), again at the midplane.

Raycraft [Ref. 29] and Houck [Ref. 30] detailed the validation of the code against experimental data of Fire-1. They also discussed such phenomena as the fire plume, pressure effect, temperature stratification, and velocity fields. Much of their analysis will not be repeated here. Instead, the effects of local numerical perturbations will be discussed.

Raycraft [Ref. 29] observed remarkable symmetry in temperature and velocity profiles throughout the entire trial. Houck [Ref. 30] also observed the expected asymmetry, after implementing forced ventilation in two locations. In this thesis, these ventilation equations are not removed. The additive velocities were simply set to zero. As seen in Figures 4.3 to 4.8, a marked asymmetry similar to that observed in Houck [Ref. 30], has developed and is readily observed in both temperature and velocity profiles. This is despite the fact that the effects of ventilation have been supposedly negated. After the millions of calculations done by the computer to provide solutions, terms in the ventilation equations which are set to zero have greatly effected the entire field.

Color graphics have greatly enhanced ability to observe phenomena in the temperature fields. Temperatures can be quickly determined using the color legend, as Figures 4.3, 4.5, and 4.7 show. These figures have been printed on a Tektronics 4693D color printer and exhibit excellent clarity and resolution.

Three dimensional vector field representation of the velocity fields, Figures 4.4, 4.6 and 4.8 can only be represented in two dimensional form for this geometry. Results become confusing if three dimensions are shown.

TEMPERATURE PROFILE: 30 SEC

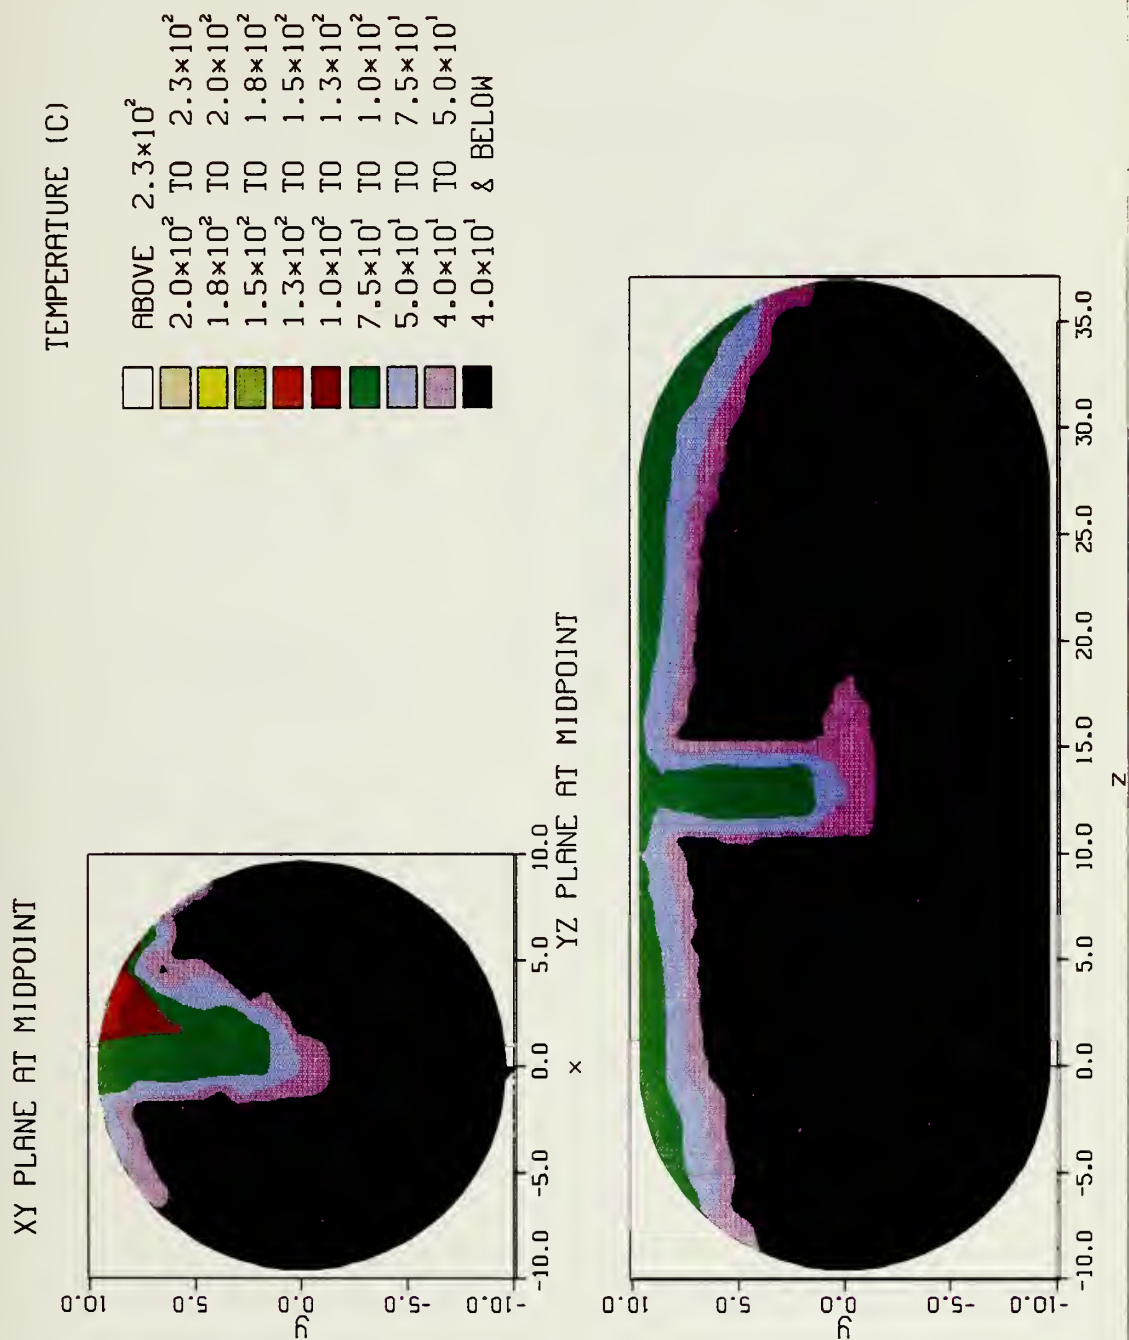


Figure 4.3 Temperature Profiles at 30 Seconds

VELOCITY PROFILE 30 SEC

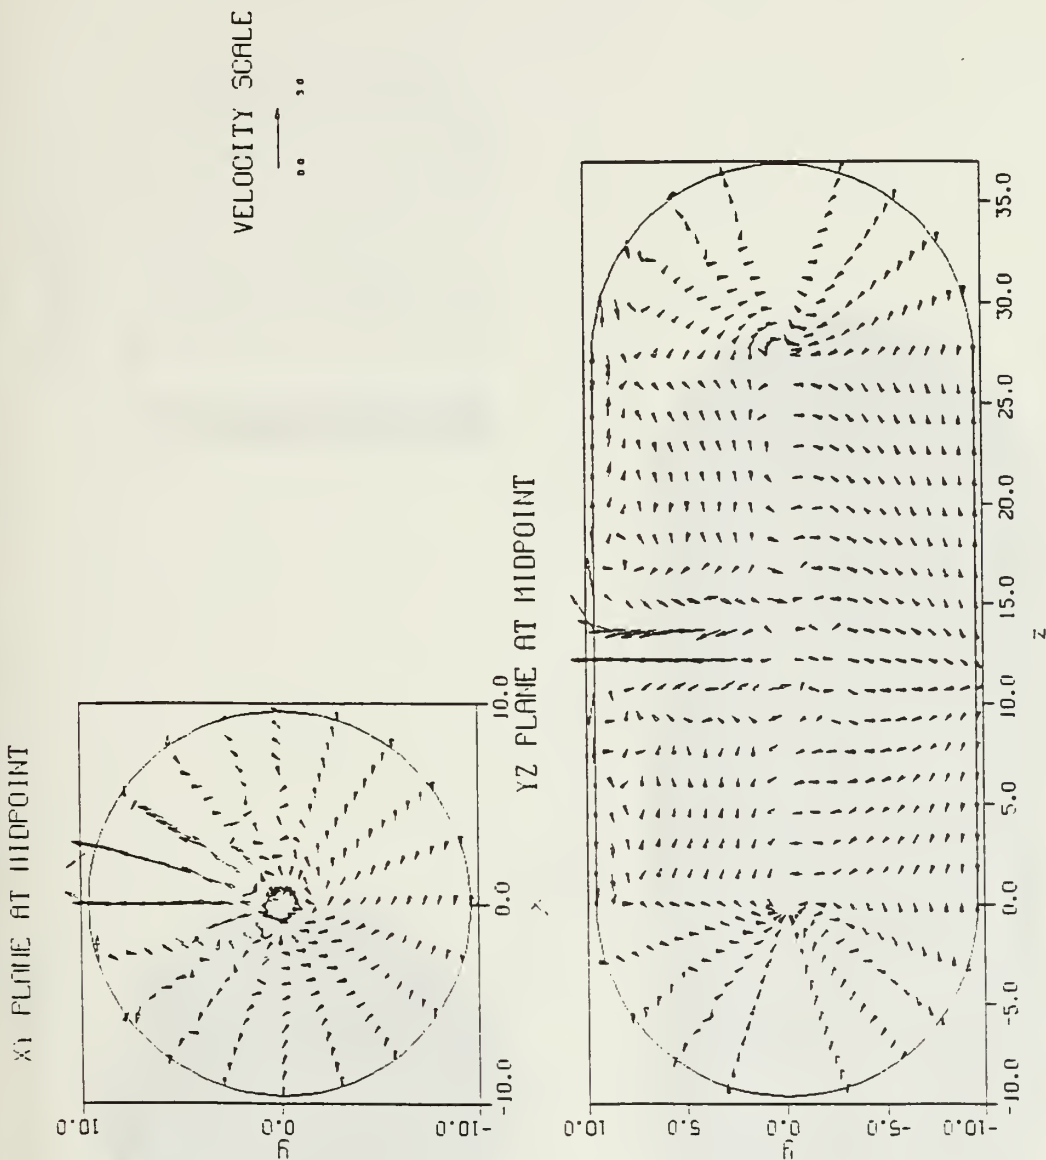


Figure 4.4 Velocity Profile at 30 Seconds

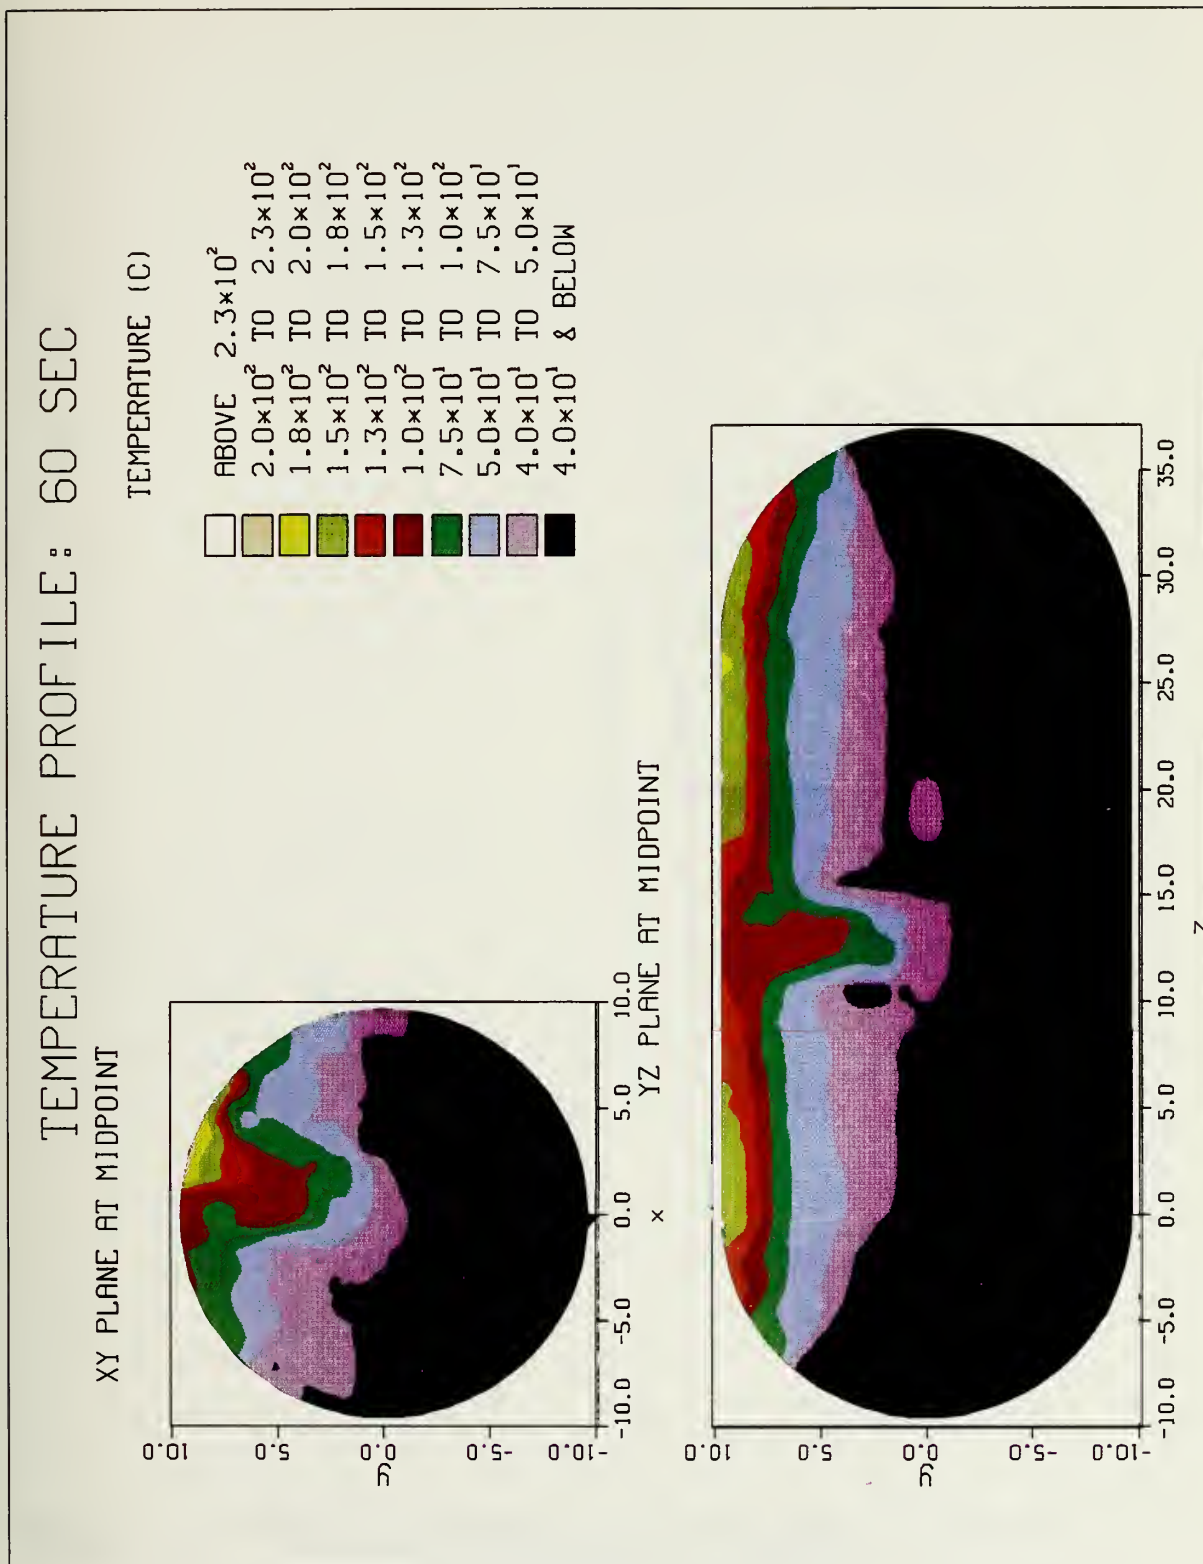


Figure 4.5 Temperature Profiles at 60 Seconds

VELOCITY PROFILE 60 SEC

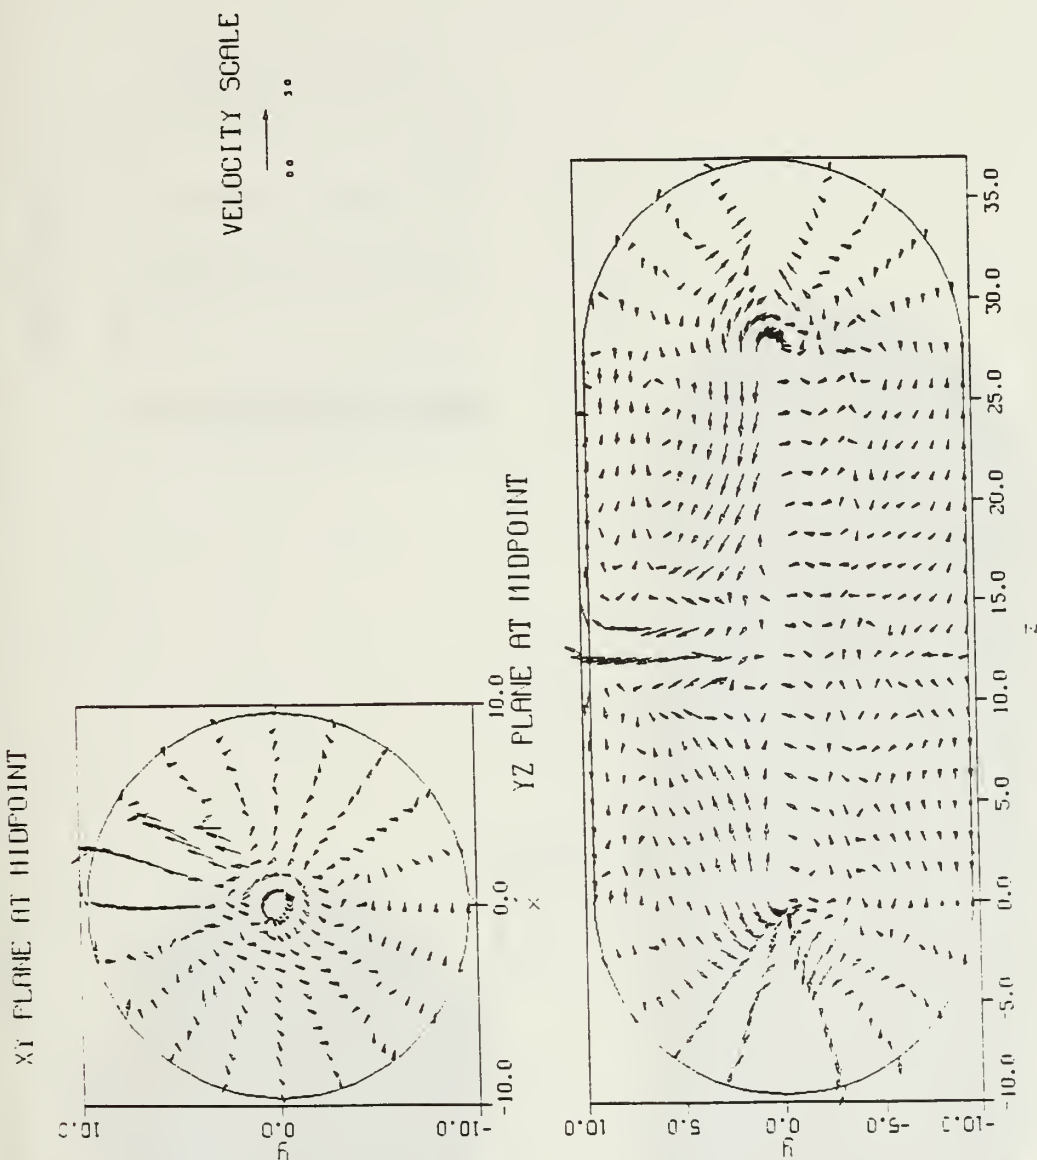


Figure 4.6 Velocity Profile at 60 Seconds

TEMPERATURE PROFILE: 90 SEC


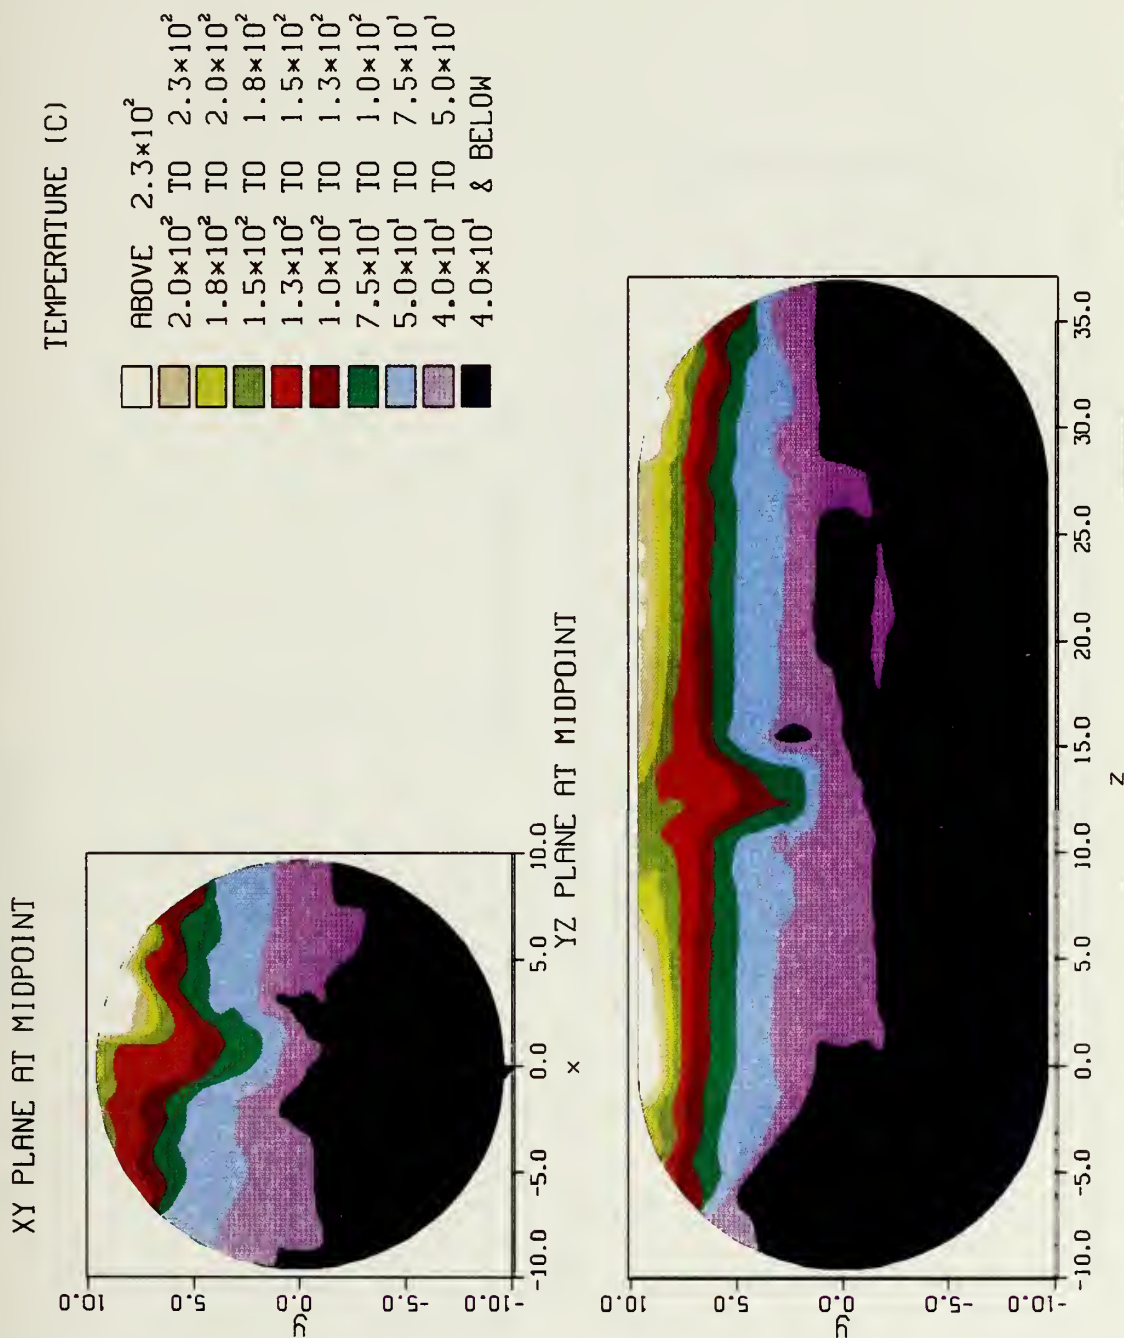


Figure 4.7 Temperature Profiles at 90 Seconds

VELOCITY PROFILE 90 SEC

XY PLANE AT MIDPOINT

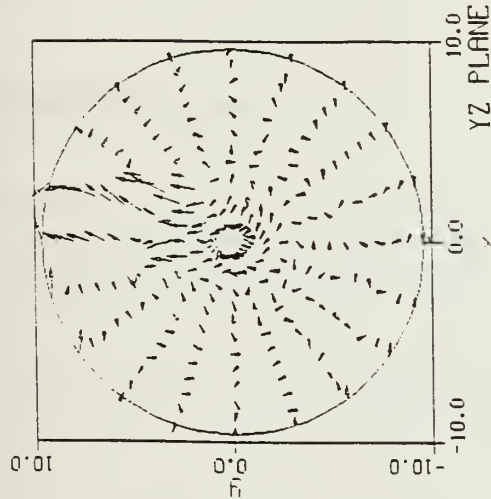

VELOCITY SCALE



YZ PLANE AT MIDPOINT

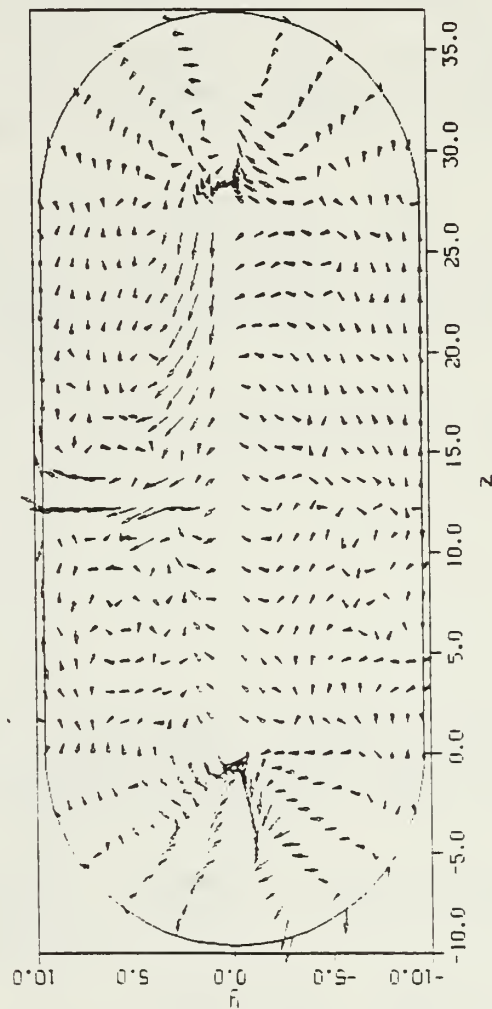


Figure 4.8 Velocity Profile at 90 Seconds

V. CONCLUSIONS AND RECOMMENDATIONS

A. CONCLUSIONS

1. The acquisition of the VAXSTATION 3100 SPX XRJ19 Model 38 workstation with its blend of numerical speed and graphics clarity has greatly enhanced the research.
2. The ventilation equations incorporated into the model in the previous thesis have a great effect on the entire field even when their output velocities are set to zero.
3. Color graphics have provided an excellent means for presenting temperature profile data. Coupled with the Tektronics 4693 color print, CA-DISSPLA™ Graphics Software provides researchers with an excellent tool for displaying scalar data fields.
4. Three dimensional vector fields are difficult to present, ambiguous, and must be reduced to two dimensional images.

B. RECOMMENDATIONS

1. Removal of the ventilation equations is required to regain symmetry observed in previous research. These equations are effecting the entire field although their additive velocities have been set to zero.
2. More sophisticated physical models need to be formulated and incorporated, such as turbulence, gaseous radiation and combustion.
3. Streakline analysis in three dimensions should be conducted to show the path taken of an individual fluid particle as it leaves the flame area. This method may reveal more of the fluid dynamics than current representations of velocity vector fields.
4. The ultimate goal of this project is to develop a model which can predict behavior of fire in shipboard

situations, for example, changing the geometry to fit machinery spaces and berthing compartments. this will offer designers a valuable tool for the construction of safer ships and submarines.

APPENDIX

```

C ***** 00000100
C ** ** 00000200
C ** THREE-DIMENSIONAL NUMERICAL SIMULATION ** 00000300
C ** OF A FIRE SPREAD INSIDE A NAVY STORAGE TANK ** 00000400
C ** ** 00000500
C ** DEVELOPED BY : ** 00000600
C ** H.Q. YANG AND K.T. YANG ** 00000700
C ** ** 00000800
C ** DEPARTMENT OF AEROSPACE & MECHANICAL ENGINEERING ** 00000900
C ** UNIVERSITY OF NOTRE DAME ** 00001000
C ** NOTRE DAME, INDIANA, 46556 ** 00001100
C ** ** 00001200
C ** DEC. 1986 ** 00001300
C ** ** 00001400
C ***** 00001500
C 00001600
C COMMON/R4/XC (93), YC (93), ZC (93), XS (93), YS (93), ZS (93),
& DXXC (93), DYYC (93), DZZC (93), DXXS (93), D YYS (93), DZZS (93) 00001800
COMMON/BL1/DX, DY, DZ, VOL, DTIME, VOLDT, THOT, TCOOL, PI, Q, QR 00001900
COMMON/BL7/NI, NIP1, NIM1, NJ, NJP1, NJM1, NK, NKP1, NKM1 00002000
& , NIP2, NJP2, NKP2, NA, NAP1, NAM1, NB, NBP1, NBM1, KRUN, NCHIP, NJRA, NWRP 00002100
COMMON/BL12/ NWRITE, NTAPE, NTMAX0, NTREAL, TIME, SORSUM, ITER 00002200
COMMON/BL14/HCOEF, TINF, CNT, ABTURB, BTURB, VISL, VISMAX, QCORRT, PM1, PM2 00002300
COMMON/BL16/ CONST1, CONST2, CONST3, CONST4, CONST6, NT, UO, H, UGRT, BUOY, 00002400
& CP0, PRT, CONDO, VIS0, RH00, HR, TR, TA, DTEMP, TWRITE, TTAPE, TMAX, GC, RAIRO 00002500
COMMON/BL20/SIG11 (22, 16, 32), SIG12 (22, 16, 32), SIG22 (22, 16, 32) 00002600
& , SIG13 (22, 16, 32), SIG23 (22, 16, 32), SIG33 (22, 16, 32) 00002700
COMMON/BL22/ICHPI (10), NCHPI (10), JCHPB (10), NCHPJ (10), KCHPB (10),
& NCHPK (10), TCHP (10), CPS (10), CONS (10), WFAN (10) 00002900
COMMON/BL31/ TOD (22, 16, 32), ROD (22, 16, 32), POD (22, 16, 32) 00003000
& , COD (22, 16, 32), UOD (22, 16, 32), VOD (22, 16, 32), WOD (22, 16, 32) 00003100
COMMON/BL32/ T (22, 16, 32), R (22, 16, 32), P (22, 16, 32) 00003200
& , C (22, 16, 32), U (22, 16, 32), V (22, 16, 32), W (22, 16, 32) 00003300
COMMON/BL33/ TPD (22, 16, 32), RPD (22, 16, 32), PPD (22, 16, 32) 00003400
& , CPD (22, 16, 32), UPD (22, 16, 32), VPD (22, 16, 32), WPD (22, 16, 32) 00003500
COMMON/BL34/ HEIGHT (22, 16, 32), REQ (22, 16, 32),
& SMP (22, 16, 32), SMPP (22, 16, 32), PP (22, 16, 32),
& DU (22, 16, 32), DV (22, 16, 32), DW (22, 16, 32) 00003800
COMMON/BL36/AP (22, 16, 32), AE (22, 16, 32), AW (22, 16, 32), AN (22, 16, 32),
& AS (22, 16, 32), AF (22, 16, 32), AB (22, 16, 32),
& SP (22, 16, 32), SU (22, 16, 32), RI (22, 16, 32) 00004100
COMMON/BL37/ VIS (22, 16, 32), COND (22, 16, 32), NOD (22, 16, 32), RWALL (579) 00004200
& , CPM (22, 16, 32), HSZ (3, 2), NHSZ (22, 16, 32), RESORM (93) 00004300
COMMON/BL38/NTHCO, CX (12), CY (12), CZ (12), NTH (12, 3), TCOUP (12) 00004400
COMMON/BL39/ALEW, PCURVE, CONSRA, PCURM1, PSOUTH, QCORR, PERROR 00004500
DIMENSION VFMXC (579, 579), T4WALL (579) 00004600
DATA X, ILEFT, SORMAX, XTIME, ITMAX/20, 400000, 0.40, 0.0, 4/ 00004700
00004800
00004900
00005000
00005100
C *** UO : REFERENCE VELOCITY (FT/SEC), 1 FT/SEC 00005200
C *** RHOO : REFERENCE AIR DENSITY (LBM/FT**3) 00005300
C *** H : REFERENCE LENGTH (FT) 00005400
C *** TA : REFERENCE TEMPERATURE (R) 00005500
C *** TINIT : INITIAL TEMPERATURE (O) 00005600
C *** GC : GRAVITATIONAL CONSTANT 00005700
C *** RAITR : GAS CONSTANT; 53.34 00005800
C *** CONST1 : RA*UO**2/GC 00005900
C *** CONST3 : INVERSE OF TA 00006000
C *** CONST4 : REFERENCE LENGTH (CM) 00006100

```

```

C *** CONST6 : REFERENCE VELOCITY (CM/S) 00006200
C *** CONSRA :  $IA^{**3}/(RA*CP*UO*H*H)$  00006300
C *** NTRWR : NTREAL/NWRITE*NWRITE 00006400
C *** NTRWA : NTREAL/NWALT*NWALT 00006500
C *** HCONV : HEAT TRANSFER COEFFICIENT ON THE AMBIENT (BTU/H.FT**2K) 00006600
C 00006700
C 00006800
C 00006900
C *** RAD,H: RADIUS OF THE CYLINDRICAL AND SPHERICAL SECTIONS 00007000
C CYL : LENGTH OF THE CYLINDRICAL SECTION OF THE TANK 00007100
C *** NI : TOTAL NUMBER CELLS IN THETA-DIRECTION 00007200
C NJ : R-DIRECTION 00007300
C NK : Z AND PHI-DIRECTIONS 00007400
C NA : FIRST NUMBER Z-DIRECTION, ALONG THE CYLINDER AXIS 00007500
C NB : LAST NUMBER Z-DIRECTION, ALONG THE CYLINDER AXIS 00007600
C *** HSZ(1,1),HSZ(1,2) FIRST AND LAST COORDIANTE OF HEAT SOURCE 00007700
C IN X-DIRECTION (IN DIMENSIONLESS FORM) 00007800
C HSZ(2,1),HSZ(2,2) FIRST AND LAST COORDIANTE OF HEAT SOURCE 00007900
C IN Y-DIRECTION (IN DIMENSIONLESS FORM) 00008000
C HSZ(3,1),HSZ(3,2) FIRST AND LAST COORDIANTE OF HEAT SOURCE 00008100
C IN Z-DIRECTION (IN DIMENSIONLESS FORM) 00008200
C 00008300
C *** ICHPB() : STARTING NODAL NUMBER FOR SOLID IN THETA-DIRECTION 00008400
C JCHPB() : R-DIRECTION 00008500
C KCHPB() : Z OR PHI-DIRECTION 00008600
C *** NCHPI() : NUMBER OF NODALS FOR SOLID IN THETA-DIRECTION 00008700
C NCHPJ() : R-DIRECTION 00008800
C NCHPK() : Z, PHI-DIRECTION 00008900
C ***** 00009000
C open(21,file='input.dat',status='old')
C ***** 00009200
C INPUT DATA & 00009300
C ***** 00009400
C write(6,*) 'calling input'
C CALL INPUT 00009500
C 00009600
C ***** 00009700
C GENERATE GRID SYSTEM & 00009800
C ***** 00009900
C write(6,*) 'calling grid'
C CALL GRID 00010000
C 00010100
C ***** 00010200
C *** READ VIEW FACTOR INVERSE MATRIX " 00010300
C ***** 00010400
C open(11,file='view.dat',status='old')
C do 225 i=1,579
C do 225 j=1,579
225 read(11,*) vfmxc(i,j)
C CLOSE (11) 00010900
C 00011000
C ***** 00011100
C INITIALIZE THE WHOLE FIELD & 00011200
C ***** 00011300
C write(6,*) 'calling init'
C CALL INIT 00011400
C 00011500
C ***** 00011600
C START CALCULATION & 00011700
C ***** 00011800
C 00011900
C NT=0 00012000
C NTIM=0 00012100
C xtime=0.0 00012200
300 CONTINUE 00012300
C 00012400
C NT=NT+1 00012500
C 00012600

```

C ***	NTMAX0 HAS THE MEANING AS "NTREAL" WHEN IT IS READ FROM	00012700
C	DISK OR TAPE.	00012800
		00012900
	IF(XTIME .GT. TMAX) GO TO 303	00013000
	NTREAL=NT+NTMAX0	00013100
	TIME=TIME+DTIME	00013200
	XTIME=TIME*H/UC	00013300
	nxtime=jint(xtime)	
	ntwrit=jint(twrite)	
	write(6,*) 'time in seconds=',xtime	00013400
	write(6,*) 'int time=',nxtime	
	write(6,*) 'int time for writing=',ntwrit	
		00013500
C	*****	00013600
C	CALCULATE THE TRANSIENT HEAT INPUT	00013700
C	NOTE IF 1 IN PARENTHESIS, THE BURN RATE IS CALCULATED	00013800
C	BY THE PRESSURE CURVE. IF EQUAL TO TWO, THE BURN RATE	00013900
C	CURVE IS EITHER GIVEN OR ESTIMATED	00014000
C	*****	00014100
	write(6,*) 'calling calq'	
	CALL CALQ(2)	00014200
		00014300
C ***	START CALCULATION	00014400
		00014500
	ITER=0	00014600
	JTERM=0	00014700
	JJTERM=0	00014800
C	DEFINE THE UPDATED TPD(I,J,K), CPD(I,J,K),RPD(I,J,K)	00014900
C	UPD(I,J,K) AND VPD(I,J,K) FOR THE USE OF CALVIS AND SU(I,J,K)	00015000
		00015100
	DO 48 K=1,NKP1	00015200
	DO 48 J=1,NJP1	00015300
	DO 48 I=1,NIP1	00015400
	TPD(I,J,K)=T(I,J,K)	00015500
	CPD(I,J,K)=C(I,J,K)	00015600
	RPD(I,J,K)=R(I,J,K)	00015700
	UPD(I,J,K)=U(I,J,K)	00015800
	VPD(I,J,K)=V(I,J,K)	00015900
	WPD(I,J,K)=W(I,J,K)	00016000
	48 CONTINUE	00016100
	29 CONTINUE	00016200
	JTERM=JTERM+1	00016300
	301 CONTINUE	00016400
		00016500
		00016600
		00016700
C	*****	00016800
C	CALCULATE THE RADIATION HEAT FLUX AT EVERY NRAD TIME STEPS	00016900
C	*****	00017000
		00017100
	NRAD = 2	00017200
	IF (MOD(NT,NRAD).NE.0) GOTO 4000	00017300
	CALL RADHT(T4WALL,VFMXC)	00017400
	4000 CONTINUE	00017500
		00017600
C	*****	00017700
C	CALCULATE THE TEMPERATURE	00017800
C	*****	00017900
	write(6,*) 'calling calt'	
	CALL CALT	00018000
		00018100
C	*****	00018200
C	CALCULATE THE SMOKE CONCENTRATION	00018300
C	*****	00018400
	write(6,*) 'calling calc'	
	CALL CALC	00018500
		00018600
	DO 2000 J=1,NJP1	00018700

DO 2000 I=1,NIP1	00018800
DO 2000 K=1,NKP1	00018900
IF(T(I,J,K).LT.TCOOL) T(I,J,K)=TCOOL	00019000
2000 CONTINUE	00019100
C%%%	00019200
C GLOBLE PRESSURE CORRECTION FOR ENCLOSED TANK AIR %	00019300
C%%%	00019400
write(6,*) 'calling globe'	
CALL GLOBE	00019500
	00019600
C%%%	00019700
C CALCULATE THE TURBULENT VISCOSITY AND CONDUCTIVITY @	00019800
C%%%	00019900
write(6,*) 'calling calvis'	
CALL CALVIS	00020000
	00020100
C%%%	00020200
C CALCULATE THE DENSITY *	00020300
C%%%	00020400
DO 100 J=1,NJP1	00020500
DO 100 I=1,NIP1	00020600
DO 100 K=1,NKP1	00020700
IF (NOD(I,J,K).EQ.1) GOTO 100	00020800
AAAA=BUOY*UGRT*HEIGHT(I,J,K)	00020900
R(I,J,K)=(UGRT*P(I,J,K)+(1./EXP(AAAA)))/T(I,J,K)	00021000
100 CONTINUE	00021100
	00021200
C%%%	00021300
C CORRECT CONDUCTIVITY OF THE SOLID \$	00021400
C%%%	00021500
IF (NCHIP.EQ.0) GOTO 410	00021600
write(6,*) 'calling solcon'	
CALL SOLCON	00021700
410 CONTINUE	00021800
	00021900
C%%%	00022000
C START PRESSURE CORRECTION ITERATIVE LOOP, IT IS THE MAJOR %	00022100
C PART OF THE ERROR CONTROL ROUTINE %	00022200
C%%%	00022300
	00022400
ITER=ITER-1	00022500
	00022600
C%%%	00022700
C CALCULATE THE VELOCITY U,V,AND W @	00022800
C%%%	00022900
write(6,*) 'calling velocities'	
00023000	
CALL CALU	00023100
c CALL STRESS	00023200
C ***	00023300
CALL CALV	00023400
c CALL STRESS	00023500
C ***	00023600
CALL CALW	00023700
write(6,*) 'wfan(1)=',wfan(1)	
c CALL STRESS	00023800
C ***	00023900
	00024000
C%%%	00024100
C CALCULATE THE PRESSURE AND STRESS &	00024200
C%%%	00024300
	00024400
write(6,*) 'calling calp'	
CALL CALP	00024500
CALL STRESS	00024600
	00024700
C%%%	00024800
C IF SOURCE TERM IS LARGER THAN 10.0, STOP PROGRAM %	00024900

C#####

IF (RESORM(ITER).GT.10.0) GOTO 2020

IF(RESORM(ITER) .LE. SORMAX) GO TO 49

IF(ITER .EQ. 1) GO TO 302

ITERM1=ITER-1

IF(RESORM(ITER) .LE. RESORM(ITERM1)) GO TO 302

GO TO 304

302 IF(JTERM .GE. 2) GO TO 37

SOURCE=RESORM(ITER)

GO TO 39

37 IF(RESORM(ITER) .LE. SOURCE) GO TO 38

GO TO 304

38 SOURCE=RESORM(ITER)

39 CONTINUE

c WRITE(6,95) ITER,RESORM(ITER),SORSUM

95 FORMAT(53X,' ITER=',I2,2X,' SOURCE=',F9.6,2X,' SORMUP=',F9.6)

DO 23 K=1,NKP1

DO 23 J=1,NJP1

DO 23 I=1,NIP1

TPD(I,J,K)=T(I,J,K)

CPD(I,J,K)=C(I,J,K)

RPD(I,J,K)=R(I,J,K)

UPD(I,J,K)=U(I,J,K)

VPD(I,J,K)=V(I,J,K)

WPD(I,J,K)=W(I,J,K)

PPD(I,J,K)=P(I,J,K)

23 CONTINUE

JJTERM=0

IF(ITER .EQ. ITMAX) GO TO 49

IF(JJTERM .EQ. 2) GO TO 35

IF(ITER .EQ. 4) GO TO 29

35 CONTINUE

IF(JJTERM .EQ. 3) GO TO 58

IF(ITER .EQ. 7) GO TO 29

58 CONTINUE

JJTERM=0

GO TO 301

304 CONTINUE

JJTERM=JJTERM+1

c IF(JJTERM .EQ. 1) WRITE(6,95) ITER,RESORM(ITER),SORSUM

IF(JJTERM .EQ. 1) GO TO 41

IF(JJTERM .EQ. 2 .AND. JJTERM .EQ. 1 .AND. ITER .NE. 5) GO TO 41

GO TO 32

41 CONTINUE

DO 40 K=1,NKP1

DO 40 J=1,NJP1

DO 40 I=1,NIP1

R(I,J,K)=RPD(I,J,K)

U(I,J,K)=UPD(I,J,K)

V(I,J,K)=VPD(I,J,K)

W(I,J,K)=WPD(I,J,K)

P(I,J,K)=PPD(I,J,K)

40 CONTINUE

IF(ITER .EQ. ITMAX) GO TO 49

GO TO 29

82 CONTINUE

DO 43 K=1,NKP1

DO 43 J=1,NJP1

DO 43 I=1,NIP1

T(I,J,K)=TPD(I,J,K)

C(I,J,K)=CPD(I,J,K)

R(I,J,K)=RPD(I,J,K)

U(I,J,K)=UPD(I,J,K)

V(I,J,K)=VPD(I,J,K)

W(I,J,K)=WPD(I,J,K)

P(I,J,K)=PPD(I,J,K)

00025000

00025100

00025200

00025300

00025400

00025500

00025600

00025700

00025800

00025900

00026000

00026100

00026200

00026300

00026400

00026500

00026600

00026700

00026800

00026900

00027000

00027100

00027200

00027300

00027400

00027500

00027600

00027700

00027800

00027900

00028000

00028100

00028200

00028300

00028400

00028500

00028600

00028700

00028800

00028900

00029000

00029100

00029200

00029300

00029400

00029500

00029600

00029700

00029800

00029900

00030000

00030100

00030200

00030300

00030400

00030500

00030600

00030700

00030800

00030900

00031000

00031100

00031200

00031300

00031400

00031500

00031600

00031700

```

43 CONTINUE                                00031800
IF(ITER.EQ. ITMAX) GO TO 49                00031900
IF((JTERM.EQ. 3 .AND. ITER.NE. 8) .OR. JJTERM.EQ. 2) GO TO 49 00032000
GO TO 301                                  00032100
49 CONTINUE                                00032200
                                           00032300
      ITERS=ITERS+ITER                     00032400
C#####                                00032500
C      GO TO THE PRESSURE TRACKING SUBROUTINE ,PRINT OUT      # 00032600
C      RESULTS IF AT THE RIGHT TIME INTERVAL                  # 00032700
C#####                                00032800
      write(6,*) 'calling ptrack'
                                           00032900
      CALL PTRACK
                                           00033000
      IF (MOD(ntreal,NWRP).EQ.0) CALL OUT(1)                    00033100
                                           00033200
C#####                                00033300
C      FIND TEMPERATURES AT THERMOCOUPLE POINTS AND PRINT OUT % 00033400
C      IF AT THE RIGHT TIME INTERVAL                          % 00033500
C#####                                00033600
      if (nthco.eq.0) goto 2422
      CALL TCP
                                           00033800
      IF (MOD(NTREAL,NWRP).EQ.0) CALL OUT(2)                    00033900
2422 CONTINUE                                00034000
      IF (MOD(nxttime,ntwrit).EQ.0) CALL OUT(3)
00034100
C      IF(NTREAL.EQ. NTREAL/NWRITE*NWRITE) CALL OUT(3)        00034200
505 CONTINUE                                00034300
      IF((XTIME-DTIME)*H/U0).GE. TMAX) GO TO 277               00034400
                                           00034500
C *** #####                                00034600
C      CALL TLEFT(IT)                                          00034700
C 123 FORMAT(' TLEFT = ',I10)                                  00034800
C      IT0=IT                                                    00034900
C      IF(IT.LT.ITLEFT) CALL OUT(3)                            00035000
C *** #####                                00035100
                                           00035200
                                           00035300
C ***      RESET THE OLD TIME VALUES TOD, ROD, UOD, VOD AND POD. 00035400
                                           00035500
      DO 305 K=1,NKP1
      DO 305 J=1,NJP1
      DO 305 I=1,NIP1
      TOD(I,J,K)=T(I,J,K)
      COD(I,J,K)=C(I,J,K)
      ROD(I,J,K)=R(I,J,K)
      UOD(I,J,K)=U(I,J,K)
      VOD(I,J,K)=V(I,J,K)
      WOD(I,J,K)=W(I,J,K)
      POD(I,J,K)=P(I,J,K)
      305 CONTINUE
                                           00036600
C #####                                00036700
C      THIS WRITING IS FOR PLOTTINGS                            00036800
C #####                                00036900
C      IF(NTREAL.NE. NTREAL/NTAPE*NTAPE)GOTO 522              00037000
C      IWRITE=10
C      WRITE(9,*)
C      & TIME,NTREAL,T,R,U,V,W,P,CPM,COND,VIS,QNET,ITERS,QCORRT,PM1,PM2,
C      & H,TA,CO,CONDO,VISCO,RH00,NI,NJ,NK,NIP1,NJP1,NKP1,NIM1,NJM1,NKM1,
C      & XC,YC,ZC,XS,YS,ZS,DXXC,DYYC,DZZC,DXXS,DYYS,DZZS
C      WRITE(6,*) 'THE TIME WHEN THE DATA WAS STORED ON DISK IS:',
C      & XTIME
C #####                                00037800
                                           00037900
                                           00038000
                                           00038100
                                           00038200
522 CONTINUE                                00038300

```


C ***	00038400
C CALL TLEFT(IT)	00038500
C IF(IT.LT.ITLEFT) GO TO 166	00038600
C ***	00038700
C TIMREM IS USED TO CALCULATE THE CPU TIME REMAINING AT NPS	00038800
C	00038900
C IF (TIMREM(0.).LE.80.) GOTO 166	00039000
do 222 k=1,nkpl	00039100
do 222 i=1,nipl	
do 222 j=1,njpl	
WRITE(9,555) t(i,j,k),u(i,j,k),v(i,j,k),w(i,j,k)	
write(9,555) p(i,j,k),cpm(i,j,k),cond(i,j,k),vis(i,j,k)	
222 continue	
write(9,556) time,qr,qcorrt,pml,pm2,xxxxx	
write(9,556) n,ta,u0,cond0,vis0,rho0	
write(9,557) ntreal,ni,nj,nk,nipl,njpl,nkpl,niml,njml,nkml,iter	
write(9,556) xc,yc,zc,xs,ys,zs	
write(9,556) dxxc,dyye,dzzc,dxxs,dyys,dzxs	
555 format(4(3x,e12.4))	
556 format(6(1x,e10.3))	
557 format(11i4)	
REWIND 9	00039200
GO TO 300	00039300
303 CONTINUE	00039400
277 CONTINUE	00039500
	00039600
WRITE(6,1111)	00039700
1111 FORMAT(2X,'***** THE MAXIMUM TIME HAS BEEN REACHED *****',I8)	00039800
C GO TO 172	00039900
	00040000
C ***	00040100
C 166 IF (NTREAL .NE. NTREAL/NTAPE*NTAPE) then	
c234567	
do 223 k=1,nkpl	
do 223 i=1,nipl	
do 223 j=1,njpl	
WRITE(9,555) t(i,j,k),u(i,j,k),v(i,j,k),w(i,j,k)	
write(9,555) p(i,j,k),cpm(i,j,k),cond(i,j,k),vis(i,j,k)	
223 continue	
write(9,556) time,qr,qcorrt,pml,pm2,xxxxx	
write(9,556) n,ta,u0,cond0,vis0,rho0	
write(9,557) ntreal,ni,nj,nk,nipl,njpl,nkpl,niml,njml,nkml,iter	
write(9,556) xc,yc,zc,xs,ys,zs	
write(9,556) cxxc,cyye,czzc,cxxs,cyys,czxs	
REWIND 9	
C ***	00040700
	00040800
GOTO 172	00040900
2020 CONTINUE	00041000
WRITE (6,*) ' RESIDUAL MASS IS LARGER THAN 10.0, PROGRAM STOPS'	00041100
172 CONTINUE	00041200
STOP	00041300
END	00041400
	00041500
	00041600
C	00041700
*****	00041800
SUBROUTINE INPUT	00041900
*****	00042000
THIS SUBROUTINE SETS UP REQUIRED VALUES TO BEGIN THE PROGRAM.	*00042100
VARIABLES ARE:	*00042200
KRUN = WHEN EQUAL TO ONE,READ FROM THE	*00042300
RESTART DISK, ELSE FROM THE JCL	*00042400
NCHIP = NUMBER OF SOLID PIECES	*00042500
NWRP = NUMBER OF TIME STEPS TO WRITE ON THE	*00042600
PAPER	*00042700

```

*          NTHCO      =      NUMBER OF THERMOCOUPLES TO PRINT OUT      *00042800
*          TMAX       =      MAXIMUM TIME ALLOWED (REAL)                *00042900
*          TWRITE     =      SECONDS IN REAL TIME TO PRINT THE         *00043000
*                               P,V,T FIELDS ON PAPER                    *00043100
*          TTAPE      =      TIME INTERVAL TO WRITE ON THE TAPE        *00043200
*          DTIME      =      TIME STEP (DIMENSIONLESS)                 *00043300
*          HSZ        =      HEAT SOURCE SIZE, USED TO CALCULATE       *00043400
*                               THE VOLUME OF THE FIRE CELL              *00043500
*          ICHPB      =      FIRST SOLID NODE IN THETA DIRECTION        *00043600
*          JCHPB      =      FIRST SOLID NODE IN R DIRECTION            *00043700
*          KCHPB      =      FIRST SOLID NODE IN PHI DIRECTION          *00043800
*          NCHPI      =      NUMBER OF NODES IN THETA DIRECTION         *00043900
*          NCHPJ      =      NUMBER OF NODES IN R DIRECTION             *00044000
*          NCHPK      =      NUMBER OF NODES IN PHI DIRECTION           *00044100
*          CX,CY,CZ   =      THERMOCOUPLE POSITIONS IN THETA,R,PHI     *00044200
*****
*          00044300
*          00044400
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),
&          DXXC(93),DYXC(93),DZXC(93),DXXS(93),DYYS(93),DZZS(93)
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1
&          ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP
COMMON/BL12/NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM2
COMMON/BL16/CONST1,CONST2,CONST3,CONST4,CONST6,NT,UO,H,UGRT,BUOY,
&          CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO
COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32)
&          ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32)
COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),
&          NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)
COMMON/BL31/TOD(22,16,32),ROD(22,16,32),POD(22,16,32)
&          ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)
COMMON/BL32/T(22,16,32),R(22,16,32),P(22,16,32)
&          ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)
COMMON/BL33/TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)
&          ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)
COMMON/BL34/HEIGHT(22,16,32),REQ(22,16,32),
&          SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),
&          DU(22,16,32),DV(22,16,32),DW(22,16,32)
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),
&          AS(22,16,32),AF(22,16,32),AB(22,16,32),
&          SP(22,16,32),SU(22,16,32),RI(22,16,32)
COMMON/BL37/VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)
&          ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)
COMMON/BL38/NTHCO,CX(12),CY(12),CZ(12),NTH(12,3),TCOUP(12)
00047200
00047300
00047400
00047500
C #1. READ IN DATA TO INDICATE EITHER KRUN=0 OR 1
READ(21,*) KRUN,NCHIP,NWRP,NTHCO
00047600
00047700
C #2. READ IN DATA SET 1 - 6 DATA
READ(21,*) TMAX,TWRITE,TTAPE,DTIME
00047800
00047900
C #3. READ IN DATA FOR HEAT SOURCE
00048000
00048100
00048200
READ(21,*) HSZ(1,1),HSZ(1,2),HSZ(2,1),HSZ(2,2),HSZ(3,1),HSZ(3,2)
WRITE(6,20) HSZ(1,1),HSZ(1,2),HSZ(2,1),HSZ(2,2),HSZ(3,1),HSZ(3,2)
20 FORMAT (/,'20X,HEAT SOURCE LOCATION IS IN THE VOLUME (NON-DIME',
&          'NSIGNAL WITH RESPECT TO RADIUS)',
&          /,'5X, FROM ',F8.4,' TO ',F8.4,' IN X-DIRECTION',
&          /,'5X, FROM ',F8.4,' TO ',F8.4,' IN Y-DIRECTION',
&          /,'5X, FROM ',F8.4,' TO ',F8.4,' IN Z-DIRECTION',/)
00048300
00048400
00048500
00048600
00048700
00048800
00048900
00049000
00049100
00049200
C #4. READ IN DECK DATA
00049300
IF (NCHIP.EQ.0) GOTO 16
PRINT *
00049400
00049500

```

```

PRINT *, '      THE REGION BOUNDED BY SOLID'
DO 19 N=1,NCHIP
  READ (21,*) ICHPB(N),NCHPI(N),JCHPB(N),NCHPJ(N),KCHPB(N),
& NCHPK(N),TCHP(N),CPS(N),CONS(N),WFAN(N)
  WRITE (6,10) N, ICHPB(N),NCHPI(N),JCHPB(N),NCHPJ(N),KCHPB(N),
& NCHPK(N),TCHP(N),CPS(N),WFAN(N),CONS(N)
10 FORMAT (2X,'N= ',I2,' ICHPB= ',I2,' NCHPI= ',I2,' JCHPB= ',I2,
& ' NCHPJ= ',I2,' KCHPB= ',I2,' NCHPK= ',I2,' TCHP= ',F8.5,
& ' CPS= ',F8.5,/, ' WFAN = ',F12.5,' CONS= ',F12.5,/)
19 CONTINUE
16 CONTINUE
  write(6,*) 'nchip=',nchip

  if(nthco.eq.0) goto 119
C #5. INPUT THERMOCOUPLE COORDINATE
C IN TERMS OF X(THETA), Y(RADIUS),Z(PHI)

PRINT *
PRINT *, '      THERMOCOUPLE POSITION IN TERMS OF THETA, R, PHI'
PRINT *
DO 110 I=1,NTHCO
  READ (21,*) CX(I),CY(I),CZ(I)
  WRITE (6,*) I, CX(I),CY(I),CZ(I)
110 CONTINUE
119 continue
RETURN
END

C
C *****
C SUBROUTINE INIT
C *****
* THIS SUBROUTINE INITIALIZES THE FIELD AND CONSTANTS WITH RESPECT
* TO INITIAL START OR RESTARTING CAPABILITY.
* VARIABLES ARE :
* TIME = DIMENSIONLESS TIME
* UO = CHARACTERISTIC VELOCITY (1 FT/SEC)
* H = CHARACTERISTIC LENGTH (RADIUS(9.6FT))
* TR = TEMP IN DEGREES KELVIN
* TA = TEMP IN DEGREES RANKINE
* VISO = REFERENCE VISCOSITY (NONDIM)
* VISL = MINIMUM VISCOSITY (NONDIM)
* VISMAL = MAXIMUM VISCOSITY (NONDIM)
* HR = RADIUS IN CM
* CONDO = REFERENCE CONDUCTIVITY
* CO = INITIAL SMOKE CONCENTRATION
* NJRA = POINT OF RADIATION IN J DIRECTION
* LOCATED ON THE INNER SOLID BOUNDARY
* HCONV = HEAT TRANSFER COEFFICIENT
* HCOEF = DIMENSIONLESS HEAT TRANSFER COEF
* CONST1 = USED TO NONDIMENSIONALIZE PRESSURE
* RHOO = REFERENCE DENSITY
* GC = GRAVITY CONSTANT
* BUOY = BUOYANCY FORCE CONSTANT
* UGRT = PERFECT GAS LAW NONDIMENSIONAL CONSTANT
* CPO = REFERENCE SPECIFIC HEAT
* NWRITE/ = NONDIMENSIONAL FORMS OF TWRITE AND
* NTAPE = TTAPE
* MATRICES OF THE FORM
* _OD = DIMENSIONLESS PARAMETER AT OLD TIME
* = DIMENSIONLESS PARAMETER
* _PD = UPDATED DIMENSIONLESS PARAMETER
* WHERE THE PARAMETERS ARE
* U,V,W = VELOCITY IN THETA, R , PHI DIRECTION
* T,P,C = TEMP, PRESSURE, AND SMOKE CONCENTRATION

```



```

*      DU,DV,DZ      =      USED IN PRESSURE CORRECTION SUBROUTINE *00056300
*      PP            =      CORRECTED PRESSURE (P') *00056400
*      SU            =      SOURCE TERM *00056500
*      SP            =      TERM AT P NODAL POINT FOR BOUNDARY *00056600
*                      CONDITIONS *00056700
*      AP            =      COEFFICIENT AT NODAL POINT *00056800
*      AE,AW,AN      =      COEFFICIENTS AT PTS EAST, WEST, NORTH, *00056900
*      AS,AF,AB      =      SOUTH, FRONT, AND BACK *00057000
*      SMP           =      RESIDUAL MASS SUMMATION OF NODAL POINT *00057100
*      SMPP          =      LENGTH SCALE FOR TURBULENCE *00057200
*      CPM           =      MEAN SPECIFIC HEAT *00057300
*      VIS           =      VISCOSITY *00057400
*      COND          =      CONDUCTIVITY MATRIX *00057500
*      NHSZ          =      WHEN THIS VALUE EQUALS ZERO, THERE IS *00057600
*                      NO HEAT SOURCE LOCATED AT THE NODE *00057700
*      NOD           =      IF EQUAL TO ZERO, LIQUID *00057800
*                      IF EQUAL TO ONE, SOLID *00057900
*      _3,_E         =      BEGINNING AND ENDING NODAL POINT FOR *00058000
*                      THE SOLID IN I,J,K *00058100
*      REQ           =      DENSITY AT EQUILIBRIUM *00058200
*      NIP1          =      NODAL POINT IN I PLUS 1 (OTHERS SIMILAR) *00058300
*      XC,YC,ZC      =      THETA,R,PHI LOCATION OF NODAL POINT OF *00058400
*                      A CENTER CELL *00058500
*      DXXC,DYYC     =      LENGTH AROUND THE CENTER CELL *00058600
*      DZZC          =      *00058700
*      XS,YS,ZS      =      THETA,R,PHI LOCATION OF NODAL POINT OF *00058800
*                      A STAGGERED CELL *00058900
*      DXXS,DYYS     =      LENGTH AROUND THE STAGGERED CELL *00059000
*      DZZS          =      *00059100
*      CX,CY,CZ      =      LOCATION OF THERMOCOUPLE IN THETA,R,PHI *00059200
*****00059300
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),
&      DXXC(93),DYYC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93) 00059400
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR 00059600
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1 00059700
&      NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP 00059800
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER 00059900
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM200060000
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY,00060100
&      CPO,PRT,CONDO,VISC,RHOC,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO060200
COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32) 00060300
&      ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32) 00060400
COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10), 00060500
&      NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10) 00060600
COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32) 00060700
&      ,COD(22,16,32),UCD(22,16,32),VOD(22,16,32),WOD(22,16,32) 00060800
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32) 00060900
&      ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32) 00061000
COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32) 00061100
&      ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32) 00061200
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32), 00061300
&      SMP(22,16,32),SMPP(22,16,32),PP(22,16,32), 00061400
&      DU(22,16,32),DV(22,16,32),DW(22,16,32) 00061500
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32), 00061600
&      AS(22,16,32),AF(22,16,32),AB(22,16,32), 00061700
&      SP(22,16,32),SU(22,16,32),RI(22,16,32) 00061800
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579) 00061900
&      ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93) 00062000
COMMON/BL38/NTHCO,CX(12),CY(12),CZ(12),NTH(12,3),TCOUP(12) 00062100
COMMON/BL39/ALEW,PCURVE,CONSR,PCURM1,PSOUTH,QCORR,PERROR 00062200
DATA GRAV/32.17/ 00062300
00062400
C ***      INTRODUCE GIVEN PARAMETERS 00062500
00062600
TIME=0. 00062700
TR=TA/1.8 00062800
H=9.6 00062900
VISO=VISC/UC/H 00063000

```

```

VISL=VISO                                00063100
VISMAX=400.*VISL                        00063200
HR=H*30.48                              00063300
CONDC=VISO/PRT                          00063400
PI=4.*ATAN(1.)                          00063500
ALEW = 1.0                              00063600
NJRA=15                                  00063700
                                           00063800
C THE HEAT TRANSFER COEFFICIENT IS IN BTU/HR/FT**2/F 00063900
HCONV=15.0                              00064000
HCOEF=HCONV/(3600.*CPO*RHO0*U0)         00064100
CO = 0.0                                 00064200
                                           00064300
                                           00064400
                                           00064500
CONST1=RHO0*U0*U0/(GC*14.696*144.)      00064600
CONST3=1.8/TA                            00064700
CONST4=H*30.48                           00064800
CONST6=U0*30.48                           00064900
NTMAXC=0                                  00065000
                                           00065100
BUOY=GRAV*H/(U0*U0)                     00065200
UGRT=UC*U0/(GC*RAIR*TA)                 00065300
TCOOL=1.0                                00065400
CONSRA=TA*TA*TA/(RHO0*CPO*U0*3600.)*1.714E-9 00065500
                                           00065600
WRITE(6,200) TR,CONDO,VISO,CPO,HR,DTIME,HCONV 00065700
200 FORMAT(5X, 'THE REFERENCE TEMPERATURE AND THERMAL PROPERTIES',/, 00065800
& /,5X, 'T = ',F10.4,'K, CONDO = ',E12.6, 00065900
& /,5X, 'VISO = ',E12.6,' CPO = ',E12.6, 00066000
& /,5X, 'RADIUS = ',E12.6,' CM', 00066100
& /,5X, 'DTIME = ',E12.6, 00066200
& /,5X, 'HCONV = ',E12.6,/) 00066300
                                           00066400
NWRITE=jint(TWRITE*U0/DTIME/H)
00066500
NTAPE=jint(TTAPE*U0/DTIME/H)
00066600
C *** PRINT OUT INPUT INFORMATION 00066700
                                           00066800
WRITE(6,61) (STAR,I=1,90),KRUN,TMAX,TWRITE,TTAPE,NWRP 00066900
61 FORMAT(///,90A1,/,5X,'KRUN = ',I2,/,5X, 00067000
& 'TMAX = ',F8.3,' SECONDS',/5X,'TWRITE = ',F8.3, 00067100
& ' SECONDS',/5X,'TTAPE = ',F8.3,' SECONDS', 00067200
& /,5X,' NUMBER INTERVALS OF WRITING ON PAPER ', I5,/) 00067300
                                           00067400
C *** INITIALIZE VARIABLE FIELD 00067500
                                           00067600
DO 220 J=1,NJPI 00067700
DO 220 I=1,NIP1 00067800
DO 220 K=1,NKPI 00067900
ROD(I,J,K)=1. 00068000
R(I,J,K)=1. 00068100
RPD(I,J,K)=1. 00068200
UOD(I,J,K)=0. 00068300
U(I,J,K)=0. 00068400
UPD(I,J,K)=0. 00068500
VOD(I,J,K)=0. 00068600
V(I,J,K)=0. 00068700
VPD(I,J,K)=0. 00068800
W(I,J,K)=0. 00068900
WPD(I,J,K)=0. 00069000
WOD(I,J,K)=0. 00069100
POD(I,J,K)=0. 00069200
P(I,J,K)=0. 00069300
PPD(I,J,K)=0. 00069400
DO(I,J,K)=0. 00069500
DV(I,J,K)=0. 00069600
DW(I,J,K)=0.

```

SU(I,J,K)=0.	00069700
SP(I,J,K)=0.	00069800
PP(I,J,K)=0.	00069900
AP(I,J,K)=0.	00070000
AW(I,J,K)=0.	00070100
AE(I,J,K)=0.	00070200
AN(I,J,K)=0.	00070300
AS(I,J,K)=0.	00070400
AF(I,J,K)=0.	00070500
AB(I,J,K)=0.	00070600
SMP(I,J,K)=0.	00070700
SMPP(I,J,K)=0.	00070800
VIS(I,J,K)=VISL	00070900
COND(I,J,K)=CONDO	00071000
CPM(I,J,K)=1.0E0	00071100
TOD(I,J,K)=1.0E0	00071200
T(I,J,K)=TOD(I,J,K)	00071300
TPD(I,J,K)=TOD(I,J,K)	00071400
COD(I,J,K)=CO	00071500
C(I,J,K)=COD(I,J,K)	00071600
CPD(I,J,K)=COD(I,J,K)	00071700
NHSZ(I,J,K)=0	00071800
NOD(I,J,K)=0	00071900
220 CONTINUE	00072000
	00072100
	00072200
C *** DETERMINE THE POSITION OF HEAT SOURCE	00072300
	00072400
DO 300 I=2,NI	00072500
DO 300 J=2,NJ	00072600
	00072700
	00072800
C CHANGE TO RECTANGULAR COORDINATES	00072900
XX=YC(J)*COS(XC(I))	00073000
YY=YC(J)*SIN(XC(I))	00073100
	00073200
C CHECK TO SEE IF IN HS CONTROL VOLUME, IF SO SET NHSZ=1	00073300
IF (XX.LT.HSZ(1,1).OR.XX.GT.HSZ(1,2)) GOTO 310	00073400
IF (YY.LT.HSZ(2,1).OR.YY.GT.HSZ(2,2)) GOTO 310	00073500
NHSZ(I,J,16)=1	00073600
NHSZ(I,J,17)=1	00073700
315 FORMAT (2X,10(4X,I4,2X,I4))	00073800
GOTO 300	00073900
310 CONTINUE	00074000
300 CONTINUE	00074100
	00074200
	00074300
C *** DEFINE THERMAL PROPERTIES OF DECK AND SOLID	00074400
	00074500
IF (NCHIP.EQ.0) GOTO 410	00074600
DO 402 N=1,NCHIP	00074700
IB=ICHPB(N)	00074800
IE=IB-NCHPI(N)-1	00074900
JB=JCHPB(N)	00075000
JE=JB-NCHPJ(N)-1	00075100
KB=KCHPB(N)	00075200
KE=KB-NCHPK(N)-1	00075300
DO 405 I=IB,IE-1	00075400
DO 405 J=JB,JE-1	00075500
DO 405 K=KB,KE-1	00075600
COND(I,J,K)=CONDC*CONS(N)	00075700
CPM(I,J,K)=CPC*CPS(N)	00075800
NOD(I,J,K)=1	00075900
405 CONTINUE	00076000
402 CONTINUE	00076100
410 CONTINUE	00076200
	00076300
	00076400

C *** FOR CONTINUING RUN, READ DATA FROM TAPE OR DISK	00076500
IF(KRUN .EQ. 1) GO TO 9997	00076600
GO TO 15	00076700
9997 DO 222 K=1,NKPL	00076800
DO 222 I=1,NIP1	00076900
DO 222 J=1,NJPL	
READ(9,555) T(I,J,K),U(I,J,K),V(I,J,K),W(I,J,K)	
READ(9,555) P(I,J,K),CPM(I,J,K),COND(I,J,K),VIS(I,J,K)	
222 CONTINUE	
READ(9,556) TIME,QR,QCORRT,PM1,PM2,XXXXX	
READ(9,556) XXN,XXTA,XXU0,XXCOND0,XXVIS0,XXRHO0	
READ(9,557) NTREAL,NI,NJ,NK,NIP1,NJPL,NKPL,NIM1,NJML,NKML,ITER	
READ(9,556) XC,YC,ZC,XS,YS,ZS	
READ(9,556) DXXC,DYYC,DZZC,DXXS,DYYS,DZZS	
555 FORMAT(4(3X,E12.4))	
556 FORMAT(6(1X,E10.3))	
557 FORMAT(11I4)	
REWIND 9	
WRITE(6,*)NTMAX0	00077800
15 CONTINUE	00077900
	00078000
	00078100
C *** DEFINE HEIGHT OF NODE POINTS AND COMPUTE HYDROSTATIC	00078200
C EQUILIBRIUM DENSITY REQ(I,J,K)	00078300
	00078400
	00078500
DO 13 K=1,NKPL	00078600
DO 13 I=1,NIP1	00078700
DO 13 J=1,NJPL	00078800
DHY=YC(J)*SIN(XC(I))*SIN(ZC(K))	00078900
HEIGHT(I,J,K)=DHY	00079000
13 CONTINUE	00079100
C	00079200
	00079300
DO 229 J=1,NJPL	00079400
DO 229 I=1,NIP1	00079500
DO 229 K=1,NKPL	00079600
AAAA=-BUOY*UGRT*HEIGHT(I,J,K)	00079700
REQ(I,J,K)=EXP(AAAA)	00079800
IF(KRUN .NE. 0) GO TO 229	00079900
RPD(I,J,K)=REQ(I,J,K)/TPD(I,J,K)	00080000
ROD(I,J,K)=RPD(I,J,K)	00080100
R(I,J,K)=RPD(I,J,K)	00080200
229 CONTINUE	00080300
	00080400
C *** INITIALIZE U,V,T,R,P FIELD	00080500
	00080600
DO 210 K=1,NKPL	00080700
DO 210 J=1,NJPL	00080800
DO 210 I=1,NIP1	00080900
T(I,J,K)=TOD(I,J,K)	00081000
C(I,J,K)=COD(I,J,K)	00081100
R(I,J,K)=ROD(I,J,K)	00081200
U(I,J,K)=UOD(I,J,K)	00081300
V(I,J,K)=VOD(I,J,K)	00081400
W(I,J,K)=WOD(I,J,K)	00081500
P(I,J,K)=POD(I,J,K)	00081600
210 CONTINUE	00081700
	00081800
C *** FOLLOWING IS FOR DETERMINING THE THERMOCOUPLE POSITIONS	00081900
	00082000
DO 5000 N=1,NTHCO	00082100
DO 5001 I=1,NIP1	00082200
IF (XC(I).LT.CX(N).AND.XC(I-1).GE.CX(N)) GOTO 5002	00082300
5001 CONTINUE	00082400
5002 II=I	00082500

```

DO 5003 J=1,NJP1                                00082600
IF (YC(J).LT.CY(N).AND.YC(J+1).GE.CY(N)) GOTO 5004 00082700
5003 CONTINUE                                     00082800
5004 JJ=J                                          00082900
                                                    00083000
DO 5005 K=1,NKP1                                00083100
IF (ZC(K).LT.CZ(N).AND.ZC(K+1).GE.CZ(N)) GOTO 5006 00083200
5005 CONTINUE                                     00083300
5006 KK=K                                          00083400
NTH(N,1)=II                                       00083500
NTH(N,2)=JJ                                       00083600
NTH(N,3)=KK                                       00083700
5000 CONTINUE                                     00083800
                                                    00083900
                                                    00084000
RETURN                                             00084100
END                                                 00084200
                                                    00084300
C *** ----- 00084400
C *** SUBROUTINE CALVIS 00084500
                                                    00084600
                                                    00084700
C *** ----- 00084800
* THIS SUBROUTINE CALCULATES THE TURBULENT VISCOSITY AND UPDATES* 00084900
* THE VISCOSITY MATRIX * 00085000
***** 00085100
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93), 00085300
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93) 00085400
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1 00085500
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP 00085600
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM2 00085700
COMMON/BL16/CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY, 00085800
& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIR 00085900
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32) 00086000
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32) 00086100
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32), 00086200
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32), 00086300
& DU(22,16,32),DV(22,16,32),DW(22,16,32) 00086400
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32), 00086500
& AS(22,16,32),AF(22,16,32),AB(22,16,32), 00086600
& SP(22,16,32),SU(22,16,32),RI(22,16,32) 00086700
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579) 00086800
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93) 00086900
                                                    00087000
                                                    00087100
C *** CALCULATE LOCAL SHEAR AND VISCOSITY VIS(I,J,K) 00087200
C 00087300
C *** SPECIFY LOCAL TURBULENT LENGTH SCALES SMPP(I,J,K) 00087400
                                                    00087500
DO 611 K=2,NK 00087600
KP2=K+2 00087700
KP1=K-1 00087800
KM1=K-1 00087900
KM2=K-2 00088000
DO 611 J=2,NJ 00088100
JP2=J+2 00088200
JP1=J+1 00088300
JM1=J-1 00088400
JM2=J-2 00088500
DO 611 I=2,NI 00088600
IP2=I-2 00088700
IP1=I-1 00088800
IM1=I-1 00088900
IM2=I-2 00089000
IF (I.EQ.2) IM2=NIM1 00089100
IF (I.EQ.NI) IP2=3 00089200
IF (NOD(I,J,K).EQ.1) GOTO 611 00089300

```

C	CENTRAL LENGTH OF THE SCALE CONTROL VOLUME	00089400
	DXP1=XL(IP1,J,K,0,0)	00089500
	DXI =XL(I ,J,K,0,0)	00089600
	DXM1=XL(IM1,J,K,0,0)	00089700
	DYP1=YL(I,JP1,K,0,0)	00089800
	DYJ =YL(I,J ,K,0,0)	00089900
	DYM1=YL(I,JM1,K,0,0)	00090000
	DZP1=ZL(I,J,KP1,0,0)	00090100
	DZK =ZL(I,J,K ,0,0)	00090200
	DZM1=ZL(I,J,KM1,0,0)	00090300
		00090400
		00090500
		00090600
		00090700
		00090800
CC	IF (J.EQ.2) DYS=DYS/2.	00090900
CC	IF (K.EQ.2) DZB=DZB/2.	00091000
	IF (J.NE.NJ) GOTO 101	00091100
	JP2=JP1	00091200
	DYN=DYN/2.	00091300
101	IF (K.NE.NK) GOTO 102	00091400
	KP2=KP1	00091500
	DZF=DZF/2.	00091600
102	CONTINUE	00091700
		00091800
C ***	CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME FOR T	00091900
	DXE =XL(IP1,J,K,0,1)	00092000
	DXW =XL(I ,J,K,0,1)	00092100
		00092200
		00092300
	DYN =YL(I,JP1,K,0,2)	00092400
	DYS =YL(I,J ,K,0,2)	00092500
		00092600
	DZF =ZL(I,J,KP1,0,3)	00092700
	DZB =ZL(I,J,K ,0,3)	00092800
		00092900
C ***	CACULATE DV/DX,D2V/DX2,DU/DX,D2U/DX2,DW/DX AND D2W/DX2	00093000
		00093100
		00093200
	DUDX=(U(IP1,J,K)-U(I,J,K))/DXI	00093300
	DUDXW=0.5*(U(IP1,J,K)-U(IM1,J,K))/DXW	00093400
	DUDXE=0.5*(U(IP2,J,K)-U(I ,J,K))/DXE	00093500
	D2UDX2=(DUDXE-DUDXW)/DXI	00093600
		00093700
		00093800
	DVDXW=0.5*(V(I,JP1,K)-V(I,J,K)-V(IM1,JP1,K)-V(IM1,J,K))/DXW	00093900
	DVDXE=0.5*(V(IP1,JP1,K)-V(IP1,J,K)-V(I,JP1,K)-V(I,J,K))/DXE	00094000
	DVDX=0.5*(DVDXE+DVDXW)	00094100
	D2VDX2= (DVDXE-DVDXW)/DXI	00094200
		00094300
		00094400
	DWDXW=0.5*(W(I,J,KP1)-W(I,J,K)-W(IM1,J,KP1)-W(IM1,J,K))/DXW	00094500
	DWDXE=0.5*(W(IP1,J,KP1)-W(IP1,J,K)-W(I,J,KP1)-W(I,J,K))/DXE	00094600
	DWDX=0.5*(DWDXE-DWDXW)	00094700
	D2WDX2= (DWDXE-DWDXW)/DXI	00094800
		00094900
		00095000
602	CONTINUE	00095100
		00095200
C ***	CALCULATE DU/DY,D2U/DY2,DV/DY,D2V/DY2,DW/DY AND D2W/DY2	00095300
		00095400
		00095500
	DVDY=(V(I,JP1,K)-V(I,J,K))/DYJ	00095600
	DVDYS=0.5*(V(I,JP1,K)-V(I,JM1,K))/DYS	00095700
	DVDYN=0.5*(V(I,JP2,K)-V(I,J ,K))/DYN	00095800
	D2VDY2=(DVDYN-DVDYS)/DYJ	00095900
		00096000
		00096100

```

DUDYS=0.5*(U(IP1,J,K)+U(I,J,K)-U(IP1,JM1,K)-U(I,JM1,K))/DYS
DUDYN=0.5*(U(IP1,JP1,K)+U(I,JP1,K)-U(IP1,J,K)-U(I,J,K))/DYN
DUDY=0.5*(DUDYN+DUDYS)
D2UDY2=(DUDYN-DUDYS)/DYJ

DWDYS=0.5*(W(I,J,KP1)+W(I,J,K)-W(I,JM1,KP1)-W(I,JM1,K))/DYS
DWDYN=0.5*(W(I,JP1,KP1)+W(I,JP1,K)-W(I,J,KP1)-W(I,J,K))/DYN
DWDY=0.5*(DWDYN+DWDYS)
D2WDY2=(DWDYN-DWDYS)/DYJ

606 CONTINUE

C *** CALCULATE DU/DZ,D2U/DZ2,DV/DZ,D2V/DZ2,DW/DZ AND D2W/DZ2

DWDZ=(W(I,J,KP1)-W(I,J,K))/DZK
DWDZF=0.5*(W(I,J,KP2)-W(I,J,K))/DZF
DWDZB=0.5*(W(I,J,KP1)-W(I,J,KM1))/DZB
D2WDZ2=(DWDZF-DWDZB)/DZK

DVDZB=0.5*(V(I,JP1,K)+V(I,J,K)-V(I,JP1,KM1)-V(I,J,KM1))/DZB
DVDZF=0.5*(V(I,JP1,KP1)+V(I,J,KP1)-V(I,JP1,K)-V(I,J,K))/DZF
DVDZ=0.5*(DVDZF+DVDZB)
D2VDZ2=(DVDZF-DVDZB)/DZK

DUDZB=0.5*(U(IP1,J,K)+U(I,J,K)-U(IP1,J,KM1)-U(I,J,KM1))/DZB
DUDZF=0.5*(U(IP1,J,KP1)+U(I,J,KP1)-U(IP1,J,K)-U(I,J,K))/DZF
DUDZ=0.5*(DUDZF+DUDZB)
D2UDZ2=(DUDZF-DUDZB)/DZK

DRDX=((R(IP1,J,K)-REQ(IP1,J,K))-(R(IM1,J,K)-REQ(IM1,J,K)))/
& (DXE-DXW)
DRDY=((R(I,JP1,K)-REQ(I,JP1,K))-(R(I,JM1,K)-REQ(I,JM1,K)))/
& (DYN-DYS)
DRDZ=((R(I,J,KP1)-REQ(I,J,KP1))-(R(I,J,KM1)-REQ(I,J,KM1)))/
& (DZF-DZB)
DRDGA=SIN(ZC(K))*(SIN(XC(I))*DRDY+COS(XC(I))*DRDX)
& -COS(ZC(K))*DRDZ

C *** CALCULATE RICHARDSON NUMBER

STRAIN=DUDY**2+DUDX**2-DWDX**2+DWDZ**2+DWDY**2+DUDZ**2
DDO2 = SQRT(DUDY*DUDY+DUDX*DUDX+DUDZ*DUDZ+DWDY*DWDY+DWDZ*DWDZ+
& D2UDZ2*D2UDZ2-DWDX*DWDX-DWDY*DWDY-DWDZ*DWDZ)
IF(DDO2.EQ.0.)GO TO 600

C *** CALCULATE TURBULENT LENGTH SCALE SMPP(I,J)

SMP123=SQRT(((U(IP1,J,K)+U(I,J,K))*0.5)**2+((V(I,JP1,K)-V(I,J,K))*
& 0.5)**2+((W(I,J,KP1)+W(I,J,K))*0.5)**2)/DDO2
SMPP12=DDO2 /SQRT(D2UDX2*D2UDX2+D2UDY2*D2UDY2
& -D2UDZ2*D2UDZ2+D2VDX2*D2VDX2+D2VDY2*D2VDY2+D2VDZ2*D2VDZ2+
& D2WDZ2*D2WDZ2+D2WDX2*D2WDX2+D2WDY2*D2WDY2)
SMPP(I,J,K)=CNT*(SMP123+SMPP12)*.5
RI(I,J,K)=-BUOY*DRDGA/(R(I,J,K)*STRAIN)
ABRIPR=ABTURB+RI(I,J,K)/PRT
IF(ABRIPR.LT. 0.) GO TO 600
IF(ABRIPR.EQ. 0.) GO TO 613
GO TO 610
600 VIS(I,J,K)=VISL
GO TO 611
613 VIS(I,J,K)=VISMAL
GO TO 611
610 VIS(I,J,K)=VISL+R(I,J,K)*SMPP(I,J,K)*SMPP(I,J,K)*SQRT(STRAIN)/
& (BTURB*ABRIPR)

```


IF (VIS(I,J,K) .GT. VISMAL) VIS(I,J,K)=VISMAL
611 CONTINUE

DO 110 I=1,NIP1
DO 110 J=1,NJP1
VIS(I,J,NKP1)=VIS(I,J,NK)
VIS(I,J,1)=VIS(I,J,2)
110 CONTINUE

DO 120 J=1,NJP1
DO 120 K=1,NKP1
VIS(NIP1,J,K)=VIS(2,J,K)
VIS(1,J,K)=VIS(NI,J,K)
120 CONTINUE

DO 130 K=1,NKP1
DO 130 I=1,NIP1
VIS(I,NJP1,K)=VIS(I,NJ,K)
VIS(I,2,K)=VIS(I,3,K)
VIS(I,1,K)=VIS(I,2,K)
130 CONTINUE

DO 135 K=1,16
KK=NKP1-K
DO 135 I=1,NIP1
DO 135 J=1,NJP1
VIS(I,J,KK)=VIS(I,J,K)
135 CONTINUE

DO 140 I=1,NIP1
DO 140 J=1,NJP1
DO 140 K=1,NKP1
IF (MOD(I,J,K).EQ.1) GOTO 140
COND(I,J,K)=VIS(I,J,K)/PRT
140 CONTINUE

RETURN
END

C
C *****
C SUBROUTINE CALT
C *****
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,P1,Q,QR
COMMON/BL7/NT,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAL,QCORRT,PM1,PM200107400
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY,00107500
& CPC,PRT,CONDC,VISO,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIROO107600
COMMON/BL22/ICHPI(10),NCHPI(10),JCHPI(10),NCHPJ(10),KCHPI(10),
& NCHPK(10),TCHPI(10),CPS(10),CONS(10),WFAN(10)
COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)
& ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)
COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)
& ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),
& DU(22,16,32),DV(22,16,32),DW(22,16,32)
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),
& AS(22,16,32),AF(22,16,32),AB(22,16,32),

00103000
00103100
00103200
00103300
00103400
00103500
00103600
00103700
00103800
00103900
00104000
00104100
00104200
00104300
00104400
00104500
00104600
00104700
00104800
00104810
00104900
00105000
00105100
00105110
00105120
00105130
00105140
00105150
00105160
00105170
00105200
00105300
00105400
00105500
00105600
00105700
00105800
00105900
00106000
00106100
00106200
00106300
00106400
00106500
00106600
00106700
00106800
00106900
00107000
00107100
00107200
00107300
00107400
00107500
00107600
00107700
00107800
00107900
00108000
00108100
00108200
00108300
00108400
00108500
00108600
00108700
00108800
00108900

&	SP (22, 16, 32), SU (22, 16, 32), RI (22, 16, 32)	00109000
	COMMON/BL37/VIS (22, 16, 32), COND (22, 16, 32), NOD (22, 16, 32), RWALL (579)	00109100
&	, CPM (22, 16, 32), HSZ (3, 2), NHSZ (22, 16, 32), RESORM (93)	00109200
		00109300
C ***	CALCULATE COEFFICIENTS	00109400
		00109500
	DO 100 K=2, NK	00109600
	KP2=K+2	00109700
	KP1=K+1	00109800
	KM1=K-1	00109900
	KM2=K-2	00110000
	DO 100 J=2, NJ	00110100
	JP2=J+2	00110200
	JP1=J+1	00110300
	JM1=J-1	00110400
	JM2=J-2	00110500
	DO 100 I=2, NI	00110600
	IP2=I+2	00110700
	IP1=I+1	00110800
	IM1=I-1	00110900
	IM2=I-2	00111000
	IF (I.EQ.2) IM2=NIM1	00111100
	IF (I.EQ.NI) IP2=3	00111200
		00111300
C	CENTRAL LENGTH OF THE TEMPERTURE CONTROL VOLUME	00111400
		00111500
	DXP1=XL(IP1, J, K, 0, 0)	00111600
	DXI =XL(I, J, K, 0, 0)	00111700
	DXM1=XL(IM1, J, K, 0, 0)	00111800
		00111900
	DYP1=YL(I, JP1, K, 0, 0)	00112000
	DYJ =YL(I, J, K, 0, 0)	00112100
	DYM1=YL(I, JM1, K, 0, 0)	00112200
		00112300
	DZP1=ZL(I, J, KP1, 0, 0)	00112400
	DZK =ZL(I, J, K, 0, 0)	00112500
	DZM1=ZL(I, J, KM1, 0, 0)	00112600
		00112700
C ***	SURFACE LENGTH OF THE CONTROL VOLUME	00112800
		00112900
	DXN=XL(I, JP1, K, 0, 2)	00113000
	DXS=XL(I, J, K, 0, 2)	00113100
	DXF=XL(I, J, KP1, 0, 3)	00113200
	DXB=XL(I, J, K, 0, 3)	00113300
		00113400
	DYF=YL(I, J, KP1, 0, 3)	00113500
	DYB=YL(I, J, K, 0, 3)	00113600
	DYE=YL(IP1, J, K, 0, 1)	00113700
	DYW=YL(I, J, K, 0, 1)	00113800
		00113900
	DZE=ZL(IP1, J, K, 0, 1)	00114000
	DZW=ZL(I, J, K, 0, 1)	00114100
	DZN=ZL(I, JP1, K, 0, 2)	00114200
	DZS=ZL(I, J, K, 0, 2)	00114300
		00114400
C ***	CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME FOR T	00114500
		00114600
	DXEE=XL(IP2, J, K, 0, 1)	00114700
	DXE =XL(IP1, J, K, 0, 1)	00114800
	DXW =XL(I, J, K, 0, 1)	00114900
	DXWW=XL(IM1, J, K, 0, 1)	00115000
		00115100
	DYNN=YL(I, JP2, K, 0, 2)	00115200
	DYN =YL(I, JP1, K, 0, 2)	00115300
	DYS =YL(I, J, K, 0, 2)	00115400
	DYSS=YL(I, JM1, K, 0, 2)	00115500
		00115600
	DZFF=ZL(I, J, KP2, 0, 3)	00115700

DZF = ZL(I,J,KP1,0,3)
 DZB = ZL(I,J,K,0,3)
 DZBB = ZL(I,J,KM1,0,3)

C *** DEFINE THE AREA OF THE CONTROL VOLUME

DXF=DXF*DYF
 DXB=DXB*DYB
 DYE=DYE*DZE
 DZW=DYW*DZW
 DXN=DXN*DXN
 DXS=DXS*DXS

VOL=DXI*DYJ*DZK
 VOLDT=VOL/DTIME

ZXOYN=DZXN/DYN
 ZXOYS=DZXS/DYS
 XYOZF=DXF/DZF
 XYOZB=DXB/DZB
 YZOXE=DYE/DXE
 YZOXW=DZW/DXW

GN=(R(I,J,K)*DYP1+R(I,JP1,K)*DYJ)/(DYP1+DYJ)
 GS=(R(I,J,K)*DYM1+R(I,JM1,K)*DYJ)/(DYM1+DYJ)
 GE=(R(I,J,K)*DXP1+R(IP1,J,K)*DXI)/(DXP1+DXI)
 GW=(R(I,J,K)*DXM1+R(IM1,J,K)*DXI)/(DXM1+DXI)
 GF=(R(I,J,K)*DZP1+R(I,J,KP1)*DZK)/(DZP1+DZK)
 GB=(R(I,J,K)*DZM1+R(I,J,KM1)*DZK)/(DZM1+DZK)

CN=GN*V(I,JP1,K)*DZXN
 CS=GS*V(I,J,K)*DZXS
 CE=GE*U(IP1,J,K)*DYZE
 CW=GW*U(I,J,K)*DYZW
 CF=GF*W(I,J,KP1)*DXYF
 CB=GB*W(I,J,K)*DXYB

CONDN=1./((1./COND(I,J,K)*DYJ+1./COND(I,JP1,K)*DYP1)/(DYP1-DYJ))
 CONDS=1./((1./COND(I,J,K)*DYJ+1./COND(I,JM1,K)*DYM1)/(DYM1+DYJ))
 CONDE=1./((1./COND(I,J,K)*DXI+1./COND(IP1,J,K)*DXP1)/(DXP1+DXI))
 CONDW=1./((1./COND(I,J,K)*DXI+1./COND(IM1,J,K)*DXM1)/(DXM1+DXI))
 CONDF=1./((1./COND(I,J,K)*DZK+1./COND(I,J,KP1)*DZP1)/(DZP1+DZK))
 CONDB=1./((1./COND(I,J,K)*DZK+1./COND(I,J,KM1)*DZM1)/(DZM1+DZK))

CONDN1=ZXOYN*CONDN
 CONDS1=ZXOYS*CONDS
 CONDE1=YZOXE*CONDE
 CONDW1=YZOXW*CONDW
 CONDF1=XYOZF*CONDF
 CONDB1=XYOZB*CONDB

CEP=(ABS(CE)+CE)*DXP1*DXI/(DXE*(DXE+DXW))/8.
 CEM=(ABS(CE)-CE)*DXP1*DXI/(DXE*(DXE+DXE))/8.
 CWP=(ABS(CW)+CW)*DXM1*DXI/(DXW*(DXW+DXW))/8.
 CWM=(ABS(CW)-CW)*DXM1*DXI/(DXW*(DXW+DXE))/8.

CNP=(ABS(CN)+CN)*DYP1*DYJ/(DYN*(DYN+DYS))/8.
 CNM=(ABS(CN)-CN)*DYP1*DYJ/(DYN*(DYN+DYN))/8.
 CSP=(ABS(CS)+CS)*DYM1*DYJ/(DYS*(DYS+DYSS))/8.
 CSM=(ABS(CS)-CS)*DYM1*DYJ/(DYS*(DYS+DYN))/8.

CFP=(ABS(CF)+CF)*DZP1*DZK/(DZF*(DZF+DZB))/8.
 CFM=(ABS(CF)-CF)*DZP1*DZK/(DZF*(DZF+DZFF))/8.
 CBP=(ABS(CB)-CB)*DZM1*DZK/(DZB*(DZB+DZBB))/8.
 CBM=(ABS(CB)-CB)*DZM1*DZK/(DZB*(DZB+DZF))/8.

00115800
 00115900
 00116000
 00116100
 00116200
 00116300
 00116400
 00116500
 00116600
 00116700
 00116800
 00116900
 00117000
 00117100
 00117200
 00117300
 00117400
 00117500
 00117600
 00117700
 00117800
 00117900
 00118000
 00118100
 00118200
 00118300
 00118400
 00118500
 00118600
 00118700
 00118800
 00118900
 00119000
 00119100
 00119200
 00119300
 00119400
 00119500
 00119600
 00119700
 00119800
 00119900
 00120000
 00120100
 00120200
 00120300
 00120400
 00120500
 00120600
 00120700
 00120800
 00120900
 00123110
 00123120
 00123130
 00123140
 00123150
 00123160
 00123170
 00123180
 00123190
 00123191
 00123192
 00123193
 00123194
 00123195
 00123196
 00123197

AE(I,J,K)=-.5*DXI/DXE*CE+CEP+CEM*(1.+DXE/DXEE)-CWM*DXW/DXE	00123198
AW(I,J,K)=.5*DXI/DXW*CW+CWM+CWP*(1.+DXW/DXWW)+CEP*DXE/DXW	00123199
AN(I,J,K)=-.5*DYJ/DYN*CN+CNP+CNM*(1.+DYN/DYNN)+CSM*DYS/DYN	00123200
AS(I,J,K)=.5*DYJ/DYS*CS+CSM+CSP*(1.+DYS/DYSS)+CNP*DYN/DYS	00123201
AF(I,J,K)=-.5*DZK/DZF*CF+CFP+CFM*(1.+DZF/DZFF)+CBM*DZB/DZF	00123202
AB(I,J,K)=.5*DZK/DZB*CB+CBM+CBP*(1.+DZB/DZBB)+CFP*DZF/DZB	00123203
C	00123204
801 AEE=-CEM*DXE/DXEE	00123210
AEER=AEE*TPD(IP2,J,K)*CPM(IP2,J,K)	00123300
802 CONTINUE	00123400
	00123500
803 AWW=-CWP*DXW/DXWW	00123600
AWWR=AWW*TPD(IM2,J,K)*CPM(IM2,J,K)	00123700
804 CONTINUE	00123800
	00123900
IF (J.LT.NJ) GOTO 805	00124000
ANN=0.	00124100
ANNR=0.	00124200
GOTO 806	00124300
805 ANN=-CNM*DYN/DYNN	00124400
ANNR=ANN*TPD(I,JP2,K)*CPM(I,JP2,K)	00124500
806 CONTINUE	00124600
	00124700
IF (J.GT.2) GOTO 807	00124800
ASS=0.	00124900
ASSR=0.	00125000
GOTO 808	00125100
807 ASS=-CSP*DYS/DYSS	00125200
ASSR=ASS*TPD(I,JM2,K)*CPM(I,JM2,K)	00125300
808 CONTINUE	00125400
	00125500
IF (K.LT.NK) GOTO 809	00125600
AFF=0.	00125700
AFFR=0.	00125800
GOTO 810	00125900
809 AFF=-CFM*DZF/DZFF	00126000
AFFR=AFF*TPD(I,J,KP2)*CPM(I,J,KP2)	00126100
810 CONTINUE	00126200
	00126300
IF (K.GT.2) GOTO 811	00126400
ABB=0.	00126500
ABBR=0.	00126600
GOTO 812	00126700
811 ABB=-CBP*DZB/DZBB	00126800
ABBR=ABB*TPD(I,J,KM2)*CPM(I,J,KM2)	00126900
812 CONTINUE	00127000
	00127100
	00127200
	00127300
C *****	00127400
C *****	00127500
C *** MODIFICATION FOR DECK BOUNDARIES	00127600
	00127700
900 CONTINUE	00127800
IF (MOD(IM1,J,K).EQ.0) GOTO 901	00127900
AWW=0.0	00128000
AWWR=0.0	00128100
	00128200
901 CONTINUE	00128300
IF (MOD(IP1,J,K).EQ.0) GOTO 902	00128400
AEE=0.0	00128500
AEER=0.0	00128600
	00128700
902 CONTINUE	00128900
IF (MOD(I,JM1,K).EQ.0) GOTO 903	00128900
ASS=0.0	00129000
ASSR=0.0	00129100
	00129200

903	CONTINUE	00129300
	IF (NOD(I,JP1,K).EQ.0) GOTO 904	00129400
	ANN=0.0	00129500
	ANNR=0.0	00129600
		00129700
904	CONTINUE	00129800
	IF (NOD(I,J,KM1).EQ.0) GOTO 905	00129900
	ABB=0.0	00130000
	ABBR=0.0	00130100
		00130200
905	CONTINUE	00130300
	IF (NOD(I,J,KP1).EQ.0) GOTO 906	00130400
	AFF=0.0	00130500
	AFFR=0.0	00130600
		00130700
906	CONTINUE	00130800
		00130900
C	*****	00131000
C	*****	00131100
	AP(I,J,K)=(AE(I,J,K)+AW(I,J,K)+AN(I,J,K)+AS(I,J,K)	00131200
	& +AF(I,J,K)+AB(I,J,K)+AEE+AWW+ANN+ASS+AFF+ABB)*CPM(I,J,K)	00131300
	& +CONDE1+CONDW1+CONDN1+CONDS1+CONDF1+CONDB1	00131400
		00131500
	AE(I,J,K)=AE(I,J,K)*CPM(IP1,J,K)+CONDE1	00131600
	AW(I,J,K)=AW(I,J,K)*CPM(IM1,J,K)+CONDW1	00131700
	AN(I,J,K)=AN(I,J,K)*CPM(I,JP1,K)+CONDN1	00131800
	AS(I,J,K)=AS(I,J,K)*CPM(I,JM1,K)+CONDS1	00131900
	AF(I,J,K)=AF(I,J,K)*CPM(I,J,KP1)+CONDF1	00132000
	AB(I,J,K)=AB(I,J,K)*CPM(I,J,KM1)+CONDB1	00132100
		00132200
	SP(I,J,K)=-ROD(I,J,K)*VOLDT*CPM(I,J,K)	00132300
	SU(I,J,K)=ROD(I,J,K)*VOLDT*TOD(I,J,K)*CPM(I,J,K)	00132400
	SU(I,J,K)=SU(I,J,K)+AEER+AWWR+ANNR+ASSR+AFFR+ABBR	00132500
100	CONTINUE	00132600
		00132700
		00132800
C ***	TAKE CARE OF B.C. THRU AN,AS,AE,AW,AF,AB,SP AND SU	00132900
		00133000
C ***	RADIUS DIRECTION	00133100
		00133200
	DO 500 I=2,N1	00133300
	DO 500 K=2,NK	00133400
	SP(I,2,K)=SP(I,2,K)+AS(I,2,K)	00133500
CC	SP(I,2,K)=SP(I,2,K)-AS(I,2,K)	00133600
CC	SU(I,2,K)=SU(I,2,K)+2.0*AS(I,2,K)*TPD(I,1,K)	00133700
	SP(I,NJ,K)=SP(I,NJ,K)-AN(I,NJ,K)	00133800
	SU(I,NJ,K)=SU(I,NJ,K)+2.*TPD(I,NJP1,K)*AN(I,NJ,K)	00133900
	AS(I,2,K)=0.	00134000
	AN(I,NJ,K)=0.	00134100
500	CONTINUE	00134200
		00134300
C ***	CYCLIC CONDITIONS	00134400
		00134500
	DO 600 J=2,NJ	00134600
	DO 600 K=2,NK	00134700
	SU(2,J,K)=SU(2,J,K)+AW(2,J,K)*T(1,J,K)	00134800
	SU(NI,J,K)=SU(NI,J,K)+AE(NI,J,K)*T(NIP1,J,K)	00134900
	AW(2,J,K)=0.0	00135000
	AE(NI,J,K)=0.0	00135100
600	CONTINUE	00135200
		00135300
C ***	END OF SPHERE	00135400
		00135500
	DO 700 I=2,N1	00135600
	DO 700 J=2,NJ	00135700
	SP(I,J,2)=SP(I,J,2)+AB(I,J,2)	00135800
	SP(I,J,NK)=SP(I,J,NK)+AF(I,J,NK)	00135900
	AB(I,J,2)=0.	00136000

AF(I,J,NK)=0.	00136100
700 CONTINUE	00136200
	00136300
	00136400
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00136500
	00136600
DO 300 K=2,NK	00136700
DO 300 J=2,NJ	00136800
DO 300 I=2,NI	00136900
AP(I,J,K)=AP(I,J,K)-SP(I,J,K)	00137000
300 CONTINUE	00137100
	00137200
	00137300
	00137400
C *** VOLUME HEAT SOURCE INPUT	00137500
	00137600
VOLT=0.0	00137700
DO 113 I=2,NI	00137800
DO 113 J=2,NJ	00137900
DO 113 K=16,17	00138000
IF (NHSZ(I,J,K).EQ.0) GOTO 113	00138100
DXI =XL(I,J,K,0,0)	00138200
DYJ =YL(I,J,K,0,0)	00138300
DZK =ZL(I,J,K,0,0)	00138400
VOL=DXI*DYJ*DZK*H*H*H	00138500
VOLT=VOLT+VOL	00138600
113 CONTINUE	00138700
	00138800
DO 111 I=2,NI	00138900
DO 111 J=2,NJ	00139000
DO 111 K=16,17	00139100
IF (NHSZ(I,J,K).EQ.0) GOTO 111	00139200
DXI =XL(I,J,K,0,0)	00139300
DYJ =YL(I,J,K,0,0)	00139400
DZK =ZL(I,J,K,0,0)	00139500
QQQ=Q*H/(UC*CPO*RHO0*TA)	00139600
VOL=DXI*DYJ*DZK	00139700
SU(I,J,K)=SU(I,J,K)+VOL*QQQ/VOLT	00139800
111 CONTINUE	00139900
	00140000
C *** RADIATION INTO THE WALL	00140100
	00140200
C DO 310 K=3,NKM1	00140300
C DO 310 I=2,NI	00140400
C DXN =XL(I,NJRA,K,0,2)	00140500
C DZN =ZL(I,NJRA,K,0,2)	00140501
C DZXN=DZN*DXN	00140503
C II=(K-3)*(NI-1)+I-1	00140504
C SU(I,NJRA,K)=SU(I,NJRA,K)-RWALL(II)*DZXN	00140600
C 310 CONTINUE	00140700
	00140800
	00140900
C *** END OF RADIATION	00141000
	00141100
C *** SOLVE FOR T	00141200
write(6,*) 'calling trid'	
00141300	
CALL TRID (2,2,2,NI,NJ,NK,T)	00141400
	00141500
C ***** RESET TEMPERATURE AT R=0.0 AND END OF SPHERE	00141600
	00141700
DO 81 K=1,NKP1	00141800
AVT=0.0	00141900
DO 82 I=2,NI	00142000
AVT=AVT-(T(I,2,K)/NIM1)	00142100
82 CONTINUE	00142200
DO 83 I=1,NIP1	00142300
T(I,1,K)=AVT	00142400

83	CONTINUE	00142500
81	CONTINUE	00142600
C		00142700
	DO 74 I=1,NIP1	00142800
	DO 74 J=1,NJP1	00142900
	T(I,J,1)=T(I,J,2)	00143000
	T(I,J,NKP1)=T(I,J,NK)	00143100
74	CONTINUE	00143200
		00143300
C ***	FOR SURFACE HEAT EXCHANGE WITH SURROUNDING	00143400
		00143500
	DO 84 I=2,NI	00143600
	DO 84 K=2,NK	00143700
	DYJ=YL(I,NJ,K,0,0)	00143800
	T(I,NJP1,K)=(2.0*COND(I,NJ,K)*T(I,NJ,K)/DYJ+HCOEF*TINF)/	00143900
	& (HCOEF+2.0*COND(I,NJ,K)/DYJ)	00144000
84	CONTINUE	00144300
		00144400
		00144500
C ***	FOR CYLIC CONDITION	00144600
		00144700
	DO 80 J=1,NJP1	00144800
	DO 80 K=1,NKP1	00144900
	T(1,J,K)=T(NI,J,K)	00145000
	T(NIP1,J,K)=T(2,J,K)	00145100
80	CONTINUE	00145200
		00145300
	RETURN	00145400
	END	00145500
		00145600
		00145700
		00145800
C		00145900
C ***	*****	00146000
	SUBROUTINE CALC	00146100
C ***	*****	00146200
	COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00146300
	& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00146400
	COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR	00146500
	COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00146600
	& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00146700
	COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER	00146800
	COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM200	00146900
	COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UO,H,UGRT,BUOY,	00147000
	& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRCO	00147100
	COMMON/BL22/ICHBPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),	00147200
	& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)	00147300
	COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)	00147400
	& ,COD(22,16,32),UCD(22,16,32),VOD(22,16,32),WOD(22,16,32)	00147500
	COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)	00147600
	& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)	00147700
	COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)	00147800
	& ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)	00147900
	COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),	00148000
	& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),	00148100
	& DU(22,16,32),DV(22,16,32),DW(22,16,32)	00148200
	COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),	00148300
	& AS(22,16,32),AF(22,16,32),AB(22,16,32),	00148400
	& SP(22,16,32),SU(22,16,32),RI(22,16,32)	00148500
	COMMON/BL37/VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)	00148600
	& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)	00148700
	COMMON/BL39/ALEW,PCURVE,CONSRA,PCURM1,PSOUTH,QCORR,PERROR	00148800
		00148900
C ***	CALCULATE COEFFICIENTS	00149000
		00149100
	DO 100 K=2,NK	00149200
	KP2=K-2	00149300
	KP1=K-1	00149400

KM1=K-1	00149500
KM2=K-2	00149600
DO 100 J=2,NJ	00149700
JP2=J+2	00149800
JP1=J+1	00149900
JM1=J-1	00150000
JM2=J-2	00150100
DO 100 I=2,NI	00150200
IP2=I-2	00150300
IP1=I-1	00150400
IM1=I-1	00150500
IM2=I-2	00150600
IF (I.EQ.2) IM2=NIM1	00150700
IF (I.EQ.NI) IP2=3	00150800
C CENTRAL LENGTH OF THE SCALE CONTROL VOLUME	00150900
DXP1=XL(IP1,J,K,0,0)	00151000
DXI =XL(I ,J,K,0,0)	00151100
DXM1=XL(IM1,J,K,0,0)	00151200
	00151300
DYP1=YL(I,JP1,K,0,0)	00151400
DYJ =YL(I,J ,K,0,0)	00151500
DYM1=YL(I,JM1,K,0,0)	00151600
	00151700
DZP1=ZL(I,J,KP1,0,0)	00151800
DZK =ZL(I,J,K ,0,0)	00151900
DZM1=ZL(I,J,KM1,0,0)	00152000
	00152100
C *** SURFACE LENGTH OF THE CONTROL VOLUME	00152200
DXN=XL(I,JP1,K,0,2)	00152300
DXS=XL(I,J ,K,0,2)	00152400
DXF=XL(I,J,KP1,0,3)	00152500
DXB=XL(I,J,K ,0,3)	00152600
	00152700
DYF=YL(I,J,KP1,0,3)	00152800
DYB=YL(I,J,K ,0,3)	00152900
DYE=YL(IP1,J,K,0,1)	00153000
DYW=YL(I ,J,K,0,1)	00153100
	00153200
DZE=ZL(IP1,J,K,0,1)	00153300
DZW=ZL(I ,J,K,0,1)	00153400
DZN=ZL(I,JP1,K,0,2)	00153500
DZS=ZL(I,J ,K,0,2)	00153600
	00153700
C *** CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME FOR T	00153800
DXEE=XL(IP2,J,K,0,1)	00153900
DXE =XL(IP1,J,K,0,1)	00154000
DXW =XL(I ,J,K,0,1)	00154100
DXWW=XL(IM1,J,K,0,1)	00154200
	00154300
DYNN=YL(I,JP2,K,0,2)	00154400
DYN =YL(I,JP1,K,0,2)	00154500
DYS =YL(I,J ,K,0,2)	00154600
DYSS=YL(I,JM1,K,0,2)	00154700
	00154800
DZFF=ZL(I,J,KP2,0,3)	00154900
DZF =ZL(I,J,KP1,0,3)	00155000
DZB =ZL(I,J,K ,0,3)	00155100
DZBB=ZL(I,J,KM1,0,3)	00155200
	00155300
C *** DEFINE THE AREA OF THE CONTROL VOLUME	00155400
DXYF=DXF*DYF	00155500
DXYB=DXB*DYB	00155600
DYZE=DYE*DZE	00155700
	00155800
	00155900
	00156000
	00156100
	00156200

DYZW=DY*DW	00156300
DZXN=DZ*DXN	00156400
DZXS=DZ*DXS	00156500
	00156600
VOL=DXI*DYJ*DZK	00156700
VOLDT=VOL/DTIME	00156800
	00156900
ZXOYN=DZXN/DYN	00157000
ZXOYS=DZXS/DYS	00157100
XYOZF=DXYF/DZF	00157200
XYOZB=DXYB/DZB	00157300
YZOXE=DYZE/DXE	00157400
YZOXW=DYZW/DXW	00157500
	00157600
GN=(R(I,J,K)*DYP1+R(I,JP1,K)*DYJ)/(DYP1+DYJ)	00157700
GS=(R(I,J,K)*DYM1+R(I,JM1,K)*DYJ)/(DYM1+DYJ)	00157800
GE=(R(I,J,K)*DXP1+R(IP1,J,K)*DXI)/(DXP1+DXI)	00157900
GW=(R(I,J,K)*DXM1+R(IM1,J,K)*DXI)/(DXM1+DXI)	00158000
GF=(R(I,J,K)*DZP1+R(I,J,KP1)*DZK)/(DZP1+DZK)	00158100
GB=(R(I,J,K)*DZM1+R(I,J,KM1)*DZK)/(DZM1+DZK)	00158200
	00158300
CN=GN*V(I,JP1,K)*DZXN	00158400
CS=GS*V(I,J,K)*DZXS	00158500
CE=GE*U(IP1,J,K)*DYZE	00158600
CW=GW*U(I,J,K)*DYZW	00158700
CF=GF*W(I,J,KP1)*DXYF	00158800
CB=GB*W(I,J,K)*DXYB	00158900
	00159000
	00159100
CONDN=1./((1./COND(I,J,K)*DYJ+1./COND(I,JP1,K)*DYP1)/(DYP1+DYJ))	00159200
CONDS=1./((1./COND(I,J,K)*DYJ+1./COND(I,JM1,K)*DYM1)/(DYM1+DYJ))	00159300
CONDE=1./((1./COND(I,J,K)*DXI+1./COND(IP1,J,K)*DXP1)/(DXP1+DXI))	00159400
CONDW=1./((1./COND(I,J,K)*DXI+1./COND(IM1,J,K)*DXM1)/(DXM1+DXI))	00159500
CONDF=1./((1./COND(I,J,K)*DZK+1./COND(I,J,KP1)*DZP1)/(DZP1+DZK))	00159600
CONDB=1./((1./COND(I,J,K)*DZK+1./COND(I,J,KM1)*DZM1)/(DZM1+DZK))	00159700
	00159800
CONDN1=ZXOYN*CONDN*ALEW	00159900
CONDS1=ZXOYS*CONDS*ALEW	00160000
CONDE1=YZOXE*CONDE*ALEW	00160100
CONDW1=YZOXW*CONDW*ALEW	00160200
CONDF1=XYOZF*CONDF*ALEW	00160300
CONDB1=XYOZB*CONDB*ALEW	00160400
	00162700
	00162800
CEP=(ABS(CE)+CE)*DXP1*DXI/(DXE*(DXE+DXW))/8.	00162801
CEM=(ABS(CE)-CE)*DXP1*DXI/(DXE*(DXE+DXEE))/8.	00162802
CWP=(ABS(CW)+CW)*DXM1*DXI/(DXW*(DXW+DXWW))/8.	00162803
CWM=(ABS(CW)-CW)*DXM1*DXI/(DXW*(DXW+DXE))/8.	00162804
	00162805
CNP=(ABS(CN)+CN)*DYP1*DYJ/(DYN*(DYN+DYS))/8.	00162806
CNM=(ABS(CN)-CN)*DYP1*DYJ/(DYN*(DYN+DYNN))/8.	00162807
CSP=(ABS(CS)+CS)*DYM1*DYJ/(DYS*(DYS+DYSS))/8.	00162808
CSM=(ABS(CS)-CS)*DYM1*DYJ/(DYS*(DYS+DYN))/8.	00162809
	00162810
CFP=(ABS(CF)+CF)*DZP1*DZK/(DZF*(DZF+DZB))/8.	00162811
CFM=(ABS(CF)-CF)*DZP1*DZK/(DZF*(DZF+DZFF))/8.	00162812
CBP=(ABS(CB)+CB)*DZM1*DZK/(DZB*(DZB+DZBB))/8.	00162813
CBM=(ABS(CB)-CB)*DZM1*DZK/(DZB*(DZB+DZF))/8.	00162814
	00162815
AE(I,J,K)=-.5*DXI/DXE*CE+CEP+CEM*(1.+DXE/DXEE)+CWM*DXW/DXE	00162816
AW(I,J,K)=.5*DXI/DXW*CW+CWM+CWP*(1.+DXW/DXWW)+CEP*DXE/DXW	00162817
AN(I,J,K)=-.5*DYJ/DYN*CN+CNP+CNM*(1.+DYN/DYNN)+CSM*DYS/DYN	00162818
AS(I,J,K)=.5*DYJ/DYS*CS+CSM+CSP*(1.+DYS/DYSS)+CNP*DYN/DYS	00162819
AF(I,J,K)=-.5*DZK/DZF*CF+CFP+CFM*(1.+DZF/DZFF)+CBM*DZB/DZF	00162820
AB(I,J,K)=.5*DZK/DZB*CB+CBM+CBP*(1.+DZB/DZBB)+CFP*DZF/DZB	00162821
	00162822
	00162823
801 AEE=-CEM*DXE/DXEE	00162830

AEER=AEE*CPD(IP2,J,K)	00162900
802 CONTINUE	00163000
	00163100
803 AWW=-CWP*DXW/DXWW	00163200
AWWR=AWW*CPD(IM2,J,K)	00163300
804 CONTINUE	00163400
	00163500
IF (J.LT.NJ) GOTO 805	00163600
ANN=0.	00163700
ANNR=0.	00163800
GOTO 806	00163900
805 ANN=-CNM*DYN/DYNN	00164000
ANNR=ANN*CPD(I,JP2,K)	00164100
806 CONTINUE	00164200
	00164300
IF (J.GT.2) GOTO 807	00164400
ASS=0.	00164500
ASSR=0.	00164600
GOTO 808	00164700
807 ASS=-CSP*DYS/DYSS	00164800
ASSR=ASS*CPD(I,JM2,K)	00164900
808 CONTINUE	00165000
	00165100
IF (K.LT.NK) GOTO 809	00165200
AFF=0.	00165300
AFFR=0.	00165400
GOTO 810	00165500
809 AFF=-CFM*DZF/DZFF	00165600
AFFR=AFF*CPD(I,J,KP2)	00165700
810 CONTINUE	00165800
	00165900
IF (K.GT.2) GOTO 811	00166000
ABB=0.	00166100
ABBR=0.	00166200
GOTO 812	00166300
811 ABB=-CBP*DZB/DZBB	00166400
ABBR=ABB*CPD(I,J,KM2)	00166500
812 CONTINUE	00166600
	00166700
	00166800
	00166900
C *****	00167000
C *****	00167100
C *** MODIFICATION FOR DECK BOUNDARIES	00167200
	00167300
900 CONTINUE	00167400
IF (NOD(IM1,J,K).EQ.0) GOTO 901	00167500
AWW=0.0	00167600
AWWR=0.0	00167700
	00167800
901 CONTINUE	00167900
IF (NOD(IP1,J,K).EQ.0) GOTO 902	00168000
AEE=0.0	00168100
AEER=0.0	00168200
	00168300
902 CONTINUE	00168400
IF (NOD(I,JM1,K).EQ.0) GOTO 903	00168500
ASS=0.0	00168600
ASSR=0.0	00168700
	00168800
903 CONTINUE	00168900
IF (NOD(I,JP1,K).EQ.0) GOTO 904	00169000
ANN=0.0	00169100
ANNR=0.0	00169200
	00169300
904 CONTINUE	00169400
IF (NOD(I,J,KM1).EQ.0) GOTO 905	00169500
ABB=0.0	00169600

ABBR=0.0	00169700
905 CONTINUE	00169800
IF (MOD(I,J,KP1).EQ.0) GOTO 906	00169900
AFF=0.0	00170000
AFFR=0.0	00170100
	00170200
906 CONTINUE	00170300
	00170400
	00170500
C *****	00170600
C *****	00170700
	00170800
AP(I,J,K)=(AE(I,J,K)+AW(I,J,K)+AN(I,J,K)+AS(I,J,K)	00170900
& +AF(I,J,K)+AB(I,J,K)+AEE+AWW+ANN+ASS+AFF+ABB)	00171000
& +CONDE1+CONDW1+CONDN1+CONDS1+CONDF1+CONDB1	00171100
	00171200
AE(I,J,K)=AE(I,J,K)+CONDE1	00171300
AW(I,J,K)=AW(I,J,K)+CONDW1	00171400
AN(I,J,K)=AN(I,J,K)+CONDN1	00171500
AS(I,J,K)=AS(I,J,K)+CONDS1	00171600
AF(I,J,K)=AF(I,J,K)+CONDF1	00171700
AB(I,J,K)=AB(I,J,K)+CONDB1	00171800
	00171900
SP(I,J,K)=-ROD(I,J,K)*VOLDT	00172000
SU(I,J,K)=ROD(I,J,K)*VOLDT*TOD(I,J,K)	00172100
SU(I,J,K)=SU(I,J,K)+AEER+AWWR+ANNR+ASSR+AFFR+ABBR	00172200
100 CONTINUE	00172300
	00172400
C *** TAKE CARE OF B.C. THRU AN,AS,AE,AW,AF,AB,SP AND SU	00172500
C	00172600
C *** RADIUS DIRECTION	00172700
	00172800
DO 500 I=2,NI	00172900
DO 500 K=2,NK	00173000
CC SP(I,2,K)=SP(I,2,K)+AS(I,2,K)	00173100
SP(I,2,K)=SP(I,2,K)-AS(I,2,K)	00173200
SU(I,2,K)=SU(I,2,K)+2.0*AS(I,2,K)*CPD(I,1,K)	00173300
SP(I,NJ,K)=SP(I,NJ,K)-AN(I,NJ,K)	00173400
SU(I,NJ,K)=SU(I,NJ,K)+2.*CPD(I,NJP1,K)*AN(I,NJ,K)	00173500
AS(I,2,K)=0.	00173600
AN(I,NJ,K)=0.	00173700
500 CONTINUE	00173800
	00173900
C *** CYLIC CONDITIONS	00174000
	00174100
DO 600 J=2,NJ	00174200
DO 600 K=2,NK	00174300
SU(2,J,K)=SU(2,J,K)+AW(2,J,K)*C(1,J,K)	00174400
SU(NI,J,K)=SU(NI,J,K)+AE(NI,J,K)*C(NIP1,J,K)	00174500
AW(2,J,K)=0.0	00174600
AE(NI,J,K)=0.0	00174700
600 CONTINUE	00174800
	00174900
C *** END OF SPHERE	00175000
	00175100
DO 700 I=2,NI	00175200
DO 700 J=2,NJ	00175300
SP(I,J,2)=SP(I,J,2)+AB(I,J,2)	00175400
SP(I,J,NK)=SP(I,J,NK)+AF(I,J,NK)	00175500
AB(I,J,2)=0.	00175600
AF(I,J,NK)=0.	00175700
700 CONTINUE	00175800
	00175900
	00176000
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00176100
	00176200
DO 300 K=2,NK	00176300
	00176400

```

DO 300 J=2,NJ
DO 300 I=2,NI
AP(I,J,K)=AP(I,J,K)-SP(I,J,K)
300 CONTINUE

C *** VOLUME MASS SOURCE INPUT

VOLT=0.0
DO 113 I=2,NI
DO 113 J=2,NJ
DO 113 K=16,17
IF (NHSZ(I,J,K).EQ.0) GOTO 113
DXI =XL(I,J,K,0,0)
DYJ =YL(I,J,K,0,0)
DZK =ZL(I,J,K,0,0)
VOL=DXI*DYJ*DZK*H*H*H
VOLT=VOLT+VOL
113 CONTINUE

DO 111 I=2,NI
DO 111 J=2,NJ
DO 111 K=16,17
IF (NHSZ(I,J,K).EQ.0) GOTO 111
DXI =XL(I,J,K,0,0)
DYJ =YL(I,J,K,0,0)
DZK =ZL(I,J,K,0,0)
QQQ=Q*H/(UO*CP0*RHO0*TA)
QMS= 1.0
QMS = QMS*H/(UO*RHO0)
VOL=DXI*DYJ*DZK
SU(I,J,K)=SU(I,J,K)+VOL*QMS/VOLT
111 CONTINUE

C *** SOLVE FOR C

CALL TRID (2,2,2,NI,NJM1,NK,C)

C ***** RESET CONCENTRATION AT R=0.0 AND END OF SPHERE

DO 81 K=1,NKP1
AVT=0.0
DO 82 I=2,NI
AVT=AVT+(C(I,2,K)/NIM1)
82 CONTINUE
DO 83 I=1,NIP1
C(I,1,K)=AVT
83 CONTINUE
81 CONTINUE

DO 74 I=1,NIP1
DO 74 J=1,NJP1
C(I,J,1)=C(I,J,2)
C(I,J,NKP1)=C(I,J,NK)
74 CONTINUE

C *** FOR SURFACE MASS EXCHANGE WITH SURROUNDING

DO 84 I=2,NI
DO 84 K=2,NK
C(I,NJP1,K)=C(I,NJ,K)
84 CONTINUE

C *** FOR CYLIC CONDITION

DO 80 J=1,NJP1

```

```

00176500
00176600
00176700
00176800
00176900
00177000
00177100
00177200
00177300
00177400
00177500
00177600
00177700
00177800
00177900
00178000
00178100
00178200
00178300
00178400
00178500
00178600
00178700
00178800
00178900
00179000
00179100
00179200
00179300
00179400
00179500
00179600
00179700
00179800
00179900
00180000
00180100
00180200
00180300
00180400
00180500
00180600
00180700
00180800
00180900
00181000
00181100
00181200
00181300
00181400
00181500
00181600
00181700
00181800
00181900
00182000
00182100
00182200
00182300
00182400
00182500
00182600
00182700
00182800
00182900
00183000
00183100
00183200

```


DO 80 K=1,NKP1	00183300
C(1,J,K)=C(NI,J,K)	00183400
C(NIP1,J,K)=C(2,J,K)	00183500
80 CONTINUE	00183600
	00183700
RETURN	00183800
END	00183900
	00184000
	00184100
	00184200
C	00184300
C	00184400
*****	00184500
SUBROUTINE CALU	00184600
*****	00184700
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00184800
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00184900
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR	00185000
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00185100
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00185200
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER	00185300
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM200185200	00185400
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,	00185500
& CPO,PRT,CONDO,VISO,RHO0,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO0185400	00185600
COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32)	00185700
& ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32)	00185800
COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),	00185900
& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)	00186000
COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)	00186100
& ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)	00186200
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)	00186300
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)	00186400
COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)	00186500
& ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)	00186600
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),	00186700
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),	00186800
& DU(22,16,32),DV(22,16,32),DW(22,16,32)	00186900
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),	00187000
& AS(22,16,32),AF(22,16,32),AB(22,16,32),	00187100
& SP(22,16,32),SU(22,16,32),RI(22,16,32)	00187200
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)	00187300
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)	00187400
C *** CALCULATE COEFFICIENTS	00187500
	00187600
DO 100 K=2,NK	00187700
KP2=K+2	00187800
KP1=K+1	00187900
KM1=K-1	00188000
KM2=K-2	00188100
DO 100 J=2,NJ	00188200
JP2=J+2	00188300
JP1=J+1	00188400
JM1=J-1	00188500
JM2=J-2	00188600
DO 100 I=2,NI	00188700
IP2=I+2	00188800
IP1=I+1	00188900
IM1=I-1	00189000
IM2=I-2	00189100
IF (I.EQ.2) IM1=NI	00189200
IF (I.EQ.2) IM2=NIM1	00189300
IF (I.EQ.3) IM2=NI	00189400
IF (I.EQ.NI) IP2=3	00189500
	00189600
C CENTRAL LENGTH OF THE SCALE CONTROL VOLUME	00189700
	00189800
DXP1=XL(IP1,J,K,1,0)	00189900
DXI =XL(I ,J,K,1,0)	00190000

DXM1=XL(IM1,J,K,1,0)	00190100
DYP1=YL(I,JP1,K,1,0)	00190200
DYJ =YL(I,J ,K,1,0)	00190300
DYM1=YL(I,JM1,K,1,0)	00190400
	00190500
	00190600
DZP1=ZL(I,J,KP1,1,0)	00190700
DZK =ZL(I,J,K ,1,0)	00190800
DZM1=ZL(I,J,KM1,1,0)	00190900
	00191000
C *** SURFACE LENGTH OF THE CONTROL VOLUME	00191100
	00191200
DXN=XL(I,JP1,K,1,2)	00191300
DXS=XL(I,J ,K,1,2)	00191400
DXF=XL(I,J,KP1,1,3)	00191500
DXB=XL(I,J,K ,1,3)	00191600
	00191700
DYF=YL(I,J,KP1,1,3)	00191800
DYB=YL(I,J,K ,1,3)	00191900
DYE=YL(IP1,J,K,1,1)	00192000
DYW=YL(I ,J,K,1,1)	00192100
	00192200
DZE=ZL(IP1,J,K,1,1)	00192300
DZW=ZL(I ,J,K,1,1)	00192400
DZN=ZL(I,JP1,K,1,2)	00192500
DZS=ZL(I,J ,K,1,2)	00192600
	00192700
C *** CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME FOR U	00192800
	00192900
DXEE=XL(IP2,J,K,1,1)	00193000
DXE =XL(IP1,J,K,1,1)	00193100
DXW =XL(I ,J,K,1,1)	00193200
DXWW=XL(IM1,J,K,1,1)	00193300
	00193400
DYNN=YL(I,JP2,K,1,2)	00193500
DYN =YL(I,JP1,K,1,2)	00193600
DYS =YL(I,J ,K,1,2)	00193700
DYSS=YL(I,JM1,K,1,2)	00193800
	00193900
DZFF=ZL(I,J,KP2,1,3)	00194000
DZF =ZL(I,J,KP1,1,3)	00194100
DZB =ZL(I,J,K ,1,3)	00194200
DZBB=ZL(I,J,KM1,1,3)	00194300
	00194400
C *** DEFINE THE AREA OF THE CONTROL VOLUME	00194500
	00194600
DXYF=DXF*DYF	00194700
DXYB=DXB*DYB	00194800
DYZE=DYE*DZE	00194900
DYZW=DYW*DZW	00195000
DZXN=DZN*DXN	00195100
DZXS=DZS*DXS	00195200
	00195300
VOL=DXI*DYJ*DZK	00195400
VOLDT=VOL/DTIME	00195500
	00195600
ZXOYN=DZXN/DYN	00195700
ZXOYS=DZXS/DYS	00195800
XYOZF=DXYF/DZF	00195900
XYOZB=DXYB/DZB	00196000
YZOZE=DYZE/DXE	00196100
YZOXW=DYZW/DXW	00196200
	00196300
	00196400
C *** USE SINGLE AND BI-LINEAR INTERPOLATION TO EVALUATE	00196500
C PHYSICAL PROPERTIES AND FLUX ON THE SURFACES.	00196600
	00196700
	00196800

GNE=SILIN(R(I ,JP1,K),R(I ,J,K),DYP1,DYJ)*V(I ,JP1,K)	00196900
GNW=SILIN(R(IM1,JP1,K),R(IM1,J,K),DYP1,DYJ)*V(IM1,JP1,K)	00197000
GSE=SILIN(R(I ,JM1,K),R(I ,J,K),DYM1,DYJ)*V(I ,J ,K)	00197100
GSW=SILIN(R(IM1,JM1,K),R(IM1,J,K),DYM1,DYJ)*V(IM1,J ,K)	00197200
GE =SILIN(R(IP1,J,K),R(I ,J,K),DXEE,DXE)*U(IP1,J,K)	00197300
GP =SILIN(R(IM1,J,K),R(I ,J,K),DXW ,DXE)*U(I ,J,K)	00197400
GW =SILIN(R(IM2,J,K),R(IM1,J,K),DXWW,DXW)*U(IM1,J,K)	00197500
GFE=SILIN(R(I ,J,KP1),R(I ,J,K),DZP1,DZK)*W(I ,J,KP1)	00197600
GFW=SILIN(R(IM1,J,KP1),R(IM1,J,K),DZP1,DZK)*W(IM1,J,KP1)	00197700
GBE=SILIN(R(I ,J,KM1),R(I ,J,K),DZM1,DZK)*W(I ,J,K)	00197800
GBW=SILIN(R(IM1,J,KM1),R(IM1,J,K),DZM1,DZK)*W(IM1,J,K)	00197900
CE=0.5*(GE+GP)*DYZE	00198000
CW=0.5*(GP+GW)*DYZW	00198100
CN=SILIN(GNE,GNW,DXE,DXW)*DZXN	00198200
CS=SILIN(GSE,GSW,DXE,DXW)*DZXS	00198300
CF=SILIN(GFE,GFW,DXE,DXW)*DXYF	00198400
CB=SILIN(GBE,GBW,DXE,DXW)*DXYB	00198500
VISE=VIS(I ,J,K)	00198600
VISW=VIS(IM1,J,K)	00198700
VISN= (VIS(I ,JP1,K)+VIS(I ,J,K)+	00198800
& VIS(IM1,JP1,K)+VIS(IM1,J,K))/4.0	00198900
VISS= (VIS(I ,JM1,K)+VIS(I ,J,K)+	00199000
& VIS(IM1,JM1,K)+VIS(IM1,J,K))/4.0	00199100
VISF= (VIS(I ,J,KP1)+VIS(I ,J,K)+	00199200
& VIS(IM1,J,KP1)+VIS(IM1,J,K))/4.0	00199300
VISB= (VIS(I ,J,KM1)+VIS(I ,J,K)+	00199400
& VIS(IM1,J,KM1)+VIS(IM1,J,K))/4.0	00199500
VISN1=ZXOYN*VISN	00199600
VISS1=ZXOYS*VISS	00199700
VISE1=YZOXE*VISE	00199800
VISW1=YZOXW*VISW	00199900
VISF1=XYOZF*VISF	00200000
VISB1=XYOZB*VISB	00200100
CEP=(ABS(CE)+CE)*DXE/DXI/16.	00200200
CEM=(ABS(CE)-CE)*DXE/DXP1/16.	00200300
CWP=(ABS(CW)+CW)*DXW/DXM1/16.	00200400
CWM=(ABS(CW)-CW)*DXW/DXI/16.	00200500
CNP=(ABS(CN)+CN)*DYP1*DYJ/(DYN*(DYN+DYS))/8.	00200600
CNM=(ABS(CN)-CN)*DYP1*DYJ/(DYN*(DYN+DYNN))/8.	00200700
CSP=(ABS(CS)+CS)*DYM1*DYJ/(DYS*(DYS+DYSS))/8.	00200800
CSM=(ABS(CS)-CS)*DYM1*DYJ/(DYS*(DYS+DYN))/8.	00200900
CFP=(ABS(CF)+CF)*DZP1*DZK/(DZF*(DZF+DZB))/8.	00201000
CFM=(ABS(CF)-CF)*DZP1*DZK/(DZF*(DZF+DZFF))/8.	00201100
CBP=(ABS(CB)+CB)*DZM1*DZK/(DZB*(DZB+DZBB))/8.	00201200
CBM=(ABS(CB)-CB)*DZM1*DZK/(DZB*(DZB+DZFF))/8.	00201300
AE(I,J,K)=-.5*CE+CEP-CEM*(1.-DXE/DXEE)+CWM*DXW/DXE-VISE1	00201400
AW(I,J,K)= .5*CW+CWM-CWP*(1.-DXW/DXWW)+CEP*DXE/DXW+VISW1	00201500
AN(I,J,K)=-.5*DYJ/DYN*CN+CNP-CNM*(1.-DYN/DYNN)+CSM*DYS/DYN-VISN1	00201600
AS(I,J,K)= .5*DYJ/DYS*CS+CSM+CSP*(1.-DYS/DYSS)+CNP*DYN/DYS+VISS1	00201700
AF(I,J,K)=-.5*DZK/DZF*CF+CFP-CFM*(1.+DZF/DZFF)+CBM*DZB/DZF+VISF1	00201800
AB(I,J,K)= .5*DZK/DZB*CB+CBM+CBP*(1.-DZB/DZBB)+CFP*DZF/DZB+VISB1	00201900

		00203340
		00203400
801	AEE=-CEX*DXE/DXEE	00203500
	AEER=AEE*UPD(IP2,J,K)	00203600
802	CONTINUE	00203700
		00203800
803	AWW=-CWP*DXW/DXWW	00203900
	AWWR=AWW*UPD(IM2,J,K)	00204000
804	CONTINUE	00204100
		00204200
	IF (J.LI.NJ) GOTO 805	00204300
	ANN=0.	00204400
	ANNR=0.	00204500
	GOTO 806	00204600
805	ANN=-CNM*DYNN/DYNN	00204700
	ANNR=ANN*UPD(I,JP2,K)	00204800
806	CONTINUE	00204900
		00205000
	IF (J.GT.2) GOTO 807	00205100
	ASS=0.	00205200
	ASSR=0.	00205300
	GOTO 808	00205400
807	ASS=-CSP*DYS/DYSS	00205500
	ASSR=ASS*UPD(I,JM2,K)	00205600
808	CONTINUE	00205700
		00205800
	IF (K.LI.NK) GOTO 809	00205900
	AFF=0.	00206000
	AFFR=0.	00206100
	GOTO 810	00206200
809	AFF=-CFM*DZF/DZFF	00206300
	AFFR=AFF*UPD(I,J,KP2)	00206400
810	CONTINUE	00206500
		00206600
	IF (K.GT.2) GOTO 811	00206700
	ABB=0.	00206800
	ABBR=0.	00206900
	GOTO 812	00207000
811	ABB=-CBP*DZB/DZBB	00207100
	ABBR=ABB*UPD(I,J,KM2)	00207200
812	CONTINUE	00207300
		00207400
		00207500
C	*****	00207600
C	*****	00207700
C	*** MODIFICATION FOR DECK BOUNDARIES	00207800
		00207900
900	CONTINUE	00208000
	IF (NOD(IM2,J,K).EQ.0) GOTO 901	00208100
	AWW=0.0	00208200
	AWWR=0.0	00208300
		00208400
901	CONTINUE	00208500
	IF (NOD(IP1,J,K).EQ.0) GOTO 902	00208600
	AEE=0.0	00208700
	AEER=0.0	00208800
		00208900
902	CONTINUE	00209000
	IF (NOD(I,JM1,K).EQ.0) GOTO 903	00209100
	ASS=0.0	00209200
	ASSR=0.0	00209300
		00209400
903	CONTINUE	00209500
	IF (NOD(I,JP1,K).EQ.0) GOTO 904	00209600
	ANN=0.0	00209700
	ANNR=0.0	00209800
904	CONTINUE	00209900
	IF (NOD(I,J,KM1).EQ.0) GOTO 905	00210000

ABB=0.0	00210100
ABBR=0.0	00210200
905 CONTINUE	00210300
IF (MOD(I,J,KP1).EQ.0) GOTO 906	00210400
AFF=0.0	00210500
AFFR=0.0	00210600
	00210700
	00210800
906 CONTINUE	00210900
C *****	00211000
C *****	00211100
	00211200
	00211300
	00211400
	00211500
C *** SU FROM NORMAL STRESS	00211600
	00211700
RE=(SIG11(I,J,K)-(U(IP1,J,K)-U(I,J,K))*VISE/DXE)*DYZE	00211800
RW=(SIG11(IM1,J,K)-(U(I,J,K)-U(IM1,J,K))*VISW/DXW)*DYZW	00211900
RN=(SIG12(I,JP1,K)-(U(I,JP1,K)-U(I,J,K))*VISN/DYN)*DZXN	00212000
RS=(SIG12(I,J,K)-(U(I,J,K)-U(I,JP1,K))*VISS/DYS)*DZXS	00212100
RF=(SIG13(I,J,KP1)-(U(I,J,KP1)-U(I,J,K))*VISF/DZF)*DXYF	00212200
RB=(SIG13(I,J,K)-(U(I,J,K)-U(I,J,KM1))*VISB/DZB)*DXYB	00212300
	00212400
C *** SU FROM CURVED STRESSES AND ACCELERATIONS	00212500
	00212600
AVG12=0.5*(SIG12(I,JP1,K)+SIG12(I,J,K))	00212700
AVG13=0.5*(SIG13(I,J,KP1)+SIG13(I,J,K))	00212800
AVG22=SILIN(SIG22(I,J,K),SIG22(IM1,J,K),DXE,DXW)	00212900
AVG33=SILIN(SIG33(I,J,K),SIG33(IM1,J,K),DXE,DXW)	00213000
	00213100
AU1=U(I,J,K)	00213200
AU2=BILIN(V(I,JP1,K),V(I,J,K),DYJ,DYJ,	00213300
& V(IM1,JP1,K),V(IM1,J,K),DYJ,DYJ,DXE,DXW)	00213400
AU3=BILIN(W(I,J,KP1),W(I,J,K),DZK,DZK,	00213500
& W(IM1,J,KP1),W(IM1,J,K),DZK,DZK,DXE,DXW)	00213600
	00213700
AR=SILIN(R(I,J,K),R(IM1,J,K),DXE,DXW)	00213800
	00213900
ARU12=AR*AU1*AU2	00214000
ARU13=AR*AU1*AU3	00214100
ARU22=AR*AU2*AU2	00214200
ARU33=AR*AU3*AU3	00214300
	00214400
RRY=(AVG12-ARU12)*DZK*(DXN-DXS)	00214500
RRZ=(AVG13-ARU13)*DYJ*(DXF-DXB)	00214600
RRX=(AVG22-ARU22)*DZK*(DYE-DYW)+	00214700
& (AVG33-ARU33)*DYJ*(DZE-DZW)	00214800
	00214900
AP(I,J,K)=AE(I,J,K)+AW(I,J,K)+AN(I,J,K)+AS(I,J,K)	00215000
& -AF(I,J,K)+AB(I,J,K)+AEE+AWW+ANN+ASS+AFF-ABB	00215100
SP(I,J,K)=-(ROD(I,J,K)*DXW+ROD(IM1,J,K)*DXE)/(DXW+DXE)*VOLDT	00215200
SU(I,J,K)=(ROD(I,J,K)*DXW+ROD(IM1,J,K)*DXE)/(DXW+DXE)*VOLDT	00215300
& *UOD(I,J,K)	00215400
SU(I,J,K)=SU(I,J,K)+DYJ*DZK*(P(IM1,J,K)-P(I,J,K))	00215500
& -AEER+AWWR+ANNR+ASSR+AFFR+ABBR	00215600
& -RE-RW-RN-RS+RRY+RRZ-RRX	00215700
& -BUOY*SIN(ZC(K))*((R(I,J,K)-REQ(I,J,K))*DXW*COS(XC(I))+(R(IM1,	00215800
& J,K)-REQ(IM1,J,K))*DXE*COS(XC(IM1)))/(DXW+DXE)*VOL	00215900
100 CONTINUE	00216000
	00216100
C *** TAKE CARE OF B.C. THRU AN,AS,AE,AW,AF,AB,SP AND SU	00216200
C	00216300
C *** RADIUS DIRECTION	00216400
	00216500
DO 500 K=2,NK	00216600
DO 500 I=2,N1	00216700
CC SP(I,2,K)=SP(I,2,K)-AS(I,2,K)	00216800

SP(I,2,K)=SP(I,2,K)-AS(I,2,K)	00216900
SU(I,2,K)=SU(I,2,K)-2.0*U(I,1,K)*AS(I,2,K)	00217000
SP(I,NJ,K)=SP(I,NJ,K)-AN(I,NJ,K)	00217100
AN(I,NJ,K)=0.	00217200
AS(I,2,K)=0.	00217300
500 CONTINUE	00217400
C *** CYLIC CONDITION	00217500
DO 502 K=2,NK	00217600
DO 502 J=2,NJ	00217700
SU(2,J,K)=SU(2,J,K)+AW(2,J,K)*U(1,J,K)	00217800
SU(NI,J,K)=SU(NI,J,K)+AE(NI,J,K)*U(NIP1,J,K)	00217900
AW(2,J,K)=0.0	00218000
AE(NI,J,K)=0.0	00218100
502 CONTINUE	00218200
C *** FRONT AND BACK WALLS	00218300
DO 600 I=2,NI	00218400
DO 600 J=2,NJ	00218500
C *** SLIP WALLS	00218600
SP(I,J,2)=SP(I,J,2)+AB(I,J,2)	00218700
SP(I,J,NK)=SP(I,J,NK)+AF(I,J,NK)	00218800
AF(I,J,NK)=0.	00218900
AB(I,J,2)=0.	00219000
600 CONTINUE	00219100
IF (NCHIP.EQ.0) GOTO 105	00219200
C *****	00219300
C *****	00219400
C *** MODIFICATION FOR DECK BOUNDARIES	00219500
DO 101 N=1,NCHIP	00219600
IB=ICHFB(N)	00219700
IE=IB-NCHPI(N)-1	00219800
IBM1=IB-1	00219900
IEP1=IE-1	00220000
JB=JCHFB(N)	00220100
JE=JB-NCHPJ(N)-1	00220200
JBM1=JB-1	00220300
JEP1=JE-1	00220400
KB=KCHFB(N)	00220500
KE=KB-NCHPK(N)-1	00220600
KBM1=KB-1	00220700
KEP1=KE-1	00220800
DO 102 J=JB,JE-1	00220900
DO 102 K=KB,KE-1	00221000
AE(IBM1,J,K)=0.0	00221100
AW(IEP1,J,K)=0.0	00221200
102 CONTINUE	00221300
DO 103 I=IB,IE	00221400
DO 103 K=KB,KE-1	00221500
SP(I,JBM1,K)=SP(I,JBM1,K)-AN(I,JBM1,K)	00221600
AN(I,JEM1,K)=0.0	00221700
SP(I,JE,K)=SP(I,JE,K)-AS(I,JE,K)	00221800
AS(I,JE,K)=0.0	00221900
103 CONTINUE	00222000
	00222100
	00222200
	00222300
	00222400
	00222500
	00222600
	00222700
	00222800
	00222900
	00223000
	00223100
	00223200
	00223300
	00223400
	00223500
	00223600

DO 106 I=IB,IE	00223700
DO 106 J=JB,JE-1	00223800
SP(I,J,KBM1)=SP(I,J,KBM1)-AF(I,J,KBM1)	00223900
AF(I,J,KBM1)=0.0	00224000
	00224100
SP(I,J,KE)=SP(I,J,KE)-AB(I,J,KE)	00224200
AB(I,J,KE)=0.0	00224300
106 CONTINUE	00224400
	00224500
	00224600
C *** FOR THE CELLS INSIDE OF THE DECKS	00224700
	00224800
DO 104 I=IB,IE	00224900
DO 104 J=JB,JE-1	00225000
DO 104 K=KB,KE-1	00225100
SP(I,J,K)=-1.0E20	00225200
AW(I,J,K)=0.	00225300
AE(I,J,K)=0.	00225400
AS(I,J,K)=0.	00225500
AN(I,J,K)=0.	00225600
SU(I,J,K)=0.	00225700
104 CONTINUE	00225800
101 CONTINUE	00225900
105 CONTINUE	00226000
	00226100
C *****	00226200
C *****	00226300
	00226400
	00226500
	00226600
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00226700
	00226800
DO 301 K=2,NK	00226900
DO 301 J=2,NJ	00227000
DO 301 I=2,NI	00227100
DYJ=YL(I,J,K,1,0)	00227200
DZK=ZL(I,J,K,1,0)	00227300
DYZ=DYJ*DZK	00227400
AP(I,J,K)=AP(I,J,K)-SP(I,J,K)	00227500
DU(I,J,K)=DYZ/AP(I,J,K)	00227600
301 CONTINUE	00227700
	00227800
	00227900
	00228000
C *** SOLVE FOR U	00228100
	00228200
CALL TRID (2,2,2,NI,NJ,NK,U)	00228300
	00228400
DO 74 I=2,NIP1	00228500
DO 74 J=2,NJP1	00228600
U(I,J,1)=U(I,J,2)	00228700
U(I,J,NKP1)=U(I,J,NK)	00228800
74 CONTINUE	00228900
	00229000
	00229100
DO 79 I=1,NIP1	00229200
DO 79 K=1,NKP1	00229300
U(I,1,K)=U(I,2,K)	00229400
C 79 CONTINUE	00229500
	00229600
	00229700
IF (NCHIP.EQ.0) GOTO 112	00229800
C *****	00229900
C *****	00230000
C *** RESET THE VELOCITY INSIDE OF DECK	00230100
	00230200
DO 110 N=1,NCHIP	00230300
IB=ICHPB(N)	00230400

```

      IE=IB-NCHPI(N)-1
      JB=JCHPB(N)
      JE=JB+NCHPJ(N)-1
      KB=KCHPB(N)
      KE=KB+NCHPK(N)-1
      DO 108 I=IB,IE
      DO 108 J=JB,JE-1
      DO 108 K=KB,KE-1
      U(I,J,K)=0.0
108  CONTINUE
110  CONTINUE
112  CONTINUE
C *****
C *****
      RETURN
      END

C
C *****
C *****
      SUBROUTINE CALV
C *****

      COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),
&      DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)
      COMMON/BL7/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR
      COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1
&      ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP
      COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER
      COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY,
&      CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,TEMP,TWRITE,TTAPE,TMAX,GC,RAIRO
      COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32)
&      ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32)
      COMMON/BL22/ ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),
&      NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)
      COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)
&      ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)
      COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)
&      ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)
      COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)
&      ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)
      COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),
&      SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),
&      DU(22,16,32),DV(22,16,32),DW(22,16,32)
      COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),
&      AS(22,16,32),AF(22,16,32),AB(22,16,32),
&      SP(22,16,32),SU(22,16,32),RI(22,16,32)
      COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)
&      ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)

C ***      CALCULATE COEFFICIENTS

      DO 100 K=2,NK
      KP2=K+2
      KP1=K-1
      KM1=K-1
      KM2=K-2
      DO 100 J=3,NJ
      JP2=J+2
      JP1=J+1
      JM1=J-1
      JM2=J-2
      DO 100 I=2,NI
      IP2=I+2
      IP1=I-1

```

IM1=I-1	00237300
IM2=I-2	00237400
IF (I.EQ.2) IM2=NIM1	00237500
IF (I.EQ.NI) IP2=3	00237600
	00237700
	00237800
C CENTRAL LENGTH OF THE SCALE CONTROL VOLUME	00237900
	00238000
DXP1=XL(IP1,J,K,2,0)	00238100
DXI =XL(I ,J,K,2,0)	00238200
DXM1=XL(IM1,J,K,2,0)	00238300
	00238400
DYP1=YL(I,JP1,K,2,0)	00238500
DYJ =YL(I,J ,K,2,0)	00238600
DYM1=YL(I,JM1,K,2,0)	00238700
	00238800
DZP1=ZL(I,J,KP1,2,0)	00238900
DZK =ZL(I,J,K ,2,0)	00239000
DZM1=ZL(I,J,KM1,2,0)	00239100
	00239200
C *** SURFACE LENGTH OF THE CONTROL VOLUME	00239300
	00239400
DXN=XL(I,JP1,K,2,2)	00239500
DXS=XL(I,J ,K,2,2)	00239600
DXF=XL(I,J,KP1,2,3)	00239700
DXB=XL(I,J,K ,2,3)	00239800
	00239900
DYF=YL(I,J,KP1,2,3)	00240000
DYB=YL(I,J,K ,2,3)	00240100
DYE=YL(IP1,J,K,2,1)	00240200
DYW=YL(I ,J,K,2,1)	00240300
	00240400
DZE=ZL(IP1,J,K,2,1)	00240500
DZW=ZL(I ,J,K,2,1)	00240600
DZN=ZL(I,JP1,K,2,2)	00240700
DZS=ZL(I,J ,K,2,2)	00240800
	00240900
C *** CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME	00241000
	00241100
DXEE=XL(IP2,J,K,2,1)	00241200
DXE =XL(IP1,J,K,2,1)	00241300
DXW =XL(I ,J,K,2,1)	00241400
DXWW=XL(IM1,J,K,2,1)	00241500
	00241600
DYNN=YL(I,JP2,K,2,2)	00241700
DYN =YL(I,JP1,K,2,2)	00241800
DYS =YL(I,J ,K,2,2)	00241900
DYSS=YL(I,JM1,K,2,2)	00242000
	00242100
DZFF=ZL(I,J,KP2,2,3)	00242200
DZF =ZL(I,J,KP1,2,3)	00242300
DZB =ZL(I,J,K ,2,3)	00242400
DZBB=ZL(I,J,KM1,2,3)	00242500
	00242600
C *** DEFINE THE AREA OF THE CONTROL VOLUME	00242700
	00242800
DXYF=DXF*DYF	00242900
DXYB=DXB*DYB	00243000
DYZE=DYE*DZE	00243100
DYZW=DYW*DZW	00243200
DZXN=DZN*DXN	00243300
DZXS=DZS*DXS	00243400
	00243500
VOL=DXI*DYJ*DZK	00243600
VOLDT=VOL/DTIME	00243700
	00243800
ZXOYN=DZXN/DYN	00243900
ZXOYS=DZXS/DYS	00244000

XYOZF=DXZF/DZF	00244100
XYOZB=DXZF/DZF	00244200
YZOXE=DYZE/DXE	00244300
YZOXW=DYZW/DXW	00244400
	00244500
	00244600
C *** USE SINGLE AND BI-LINEAR INTERPOLATION TO EVALUATE	00244700
C & PHYSICAL PROPERTIES AND FLUX ON THE SURFACES.	00244800
	00244900
	00245000
GEN=SILIN(R(IP1,J,K),R(I,J,K),DXP1,DXI)*U(IP1,J,K)	00245100
GES=SILIN(R(IP1,JM1,K),R(I,JM1,K),DXP1,DXI)*U(IP1,JM1,K)	00245200
GWN=SILIN(R(IM1,J,K),R(I,J,K),DXM1,DXI)*U(I,J,K)	00245300
GWS=SILIN(R(IM1,JM1,K),R(I,JM1,K),DXM1,DXI)*U(I,JM1,K)	00245400
	00245500
GN=SILIN(R(I,JP1,K),R(I,J,K),DYN,DYN)*V(I,JP1,K)	00245600
GP=SILIN(R(I,JM1,K),R(I,J,K),DYS,DYN)*V(I,J,K)	00245700
GS=SILIN(R(I,JM2,K),R(I,JM1,K),DYS,DYS)*V(I,JM1,K)	00245800
	00245900
GFN=SILIN(R(I,J,KP1),R(I,J,K),DZP1,DZK)*W(I,J,KP1)	00246000
GFS=SILIN(R(I,JM1,KP1),R(I,JM1,K),DZP1,DZK)*W(I,JM1,KP1)	00246100
GBN=SILIN(R(I,J,KM1),R(I,J,K),DZM1,DZK)*W(I,J,K)	00246200
GBS=SILIN(R(I,JM1,KM1),R(I,JM1,K),DZM1,DZK)*W(I,JM1,K)	00246300
	00246400
CN=0.5*(GN+GP)*DZXN	00246500
CS=0.5*(GP+GS)*DZXS	00246600
	00246700
CE=SILIN(GEN,GES,DYN,DYS)*DYZE	00246800
CW=SILIN(GWN,GWS,DYN,DYS)*DYZW	00246900
	00247000
CF=SILIN(GFN,GFS,DYN,DYS)*DXZF	00247100
CB=SILIN(GBN,GBS,DYN,DYS)*DXFB	00247200
	00247300
VISN=VIS(I,J,K)	00247400
VISS=VIS(I,JM1,K)	00247500
	00247600
WISE=(VIS(IP1,J,K)+VIS(I,J,K)+	00247700
& VIS(IP1,JM1,K)+VIS(I,JM1,K))/4.0	00247800
VISW=(VIS(IM1,J,K)+VIS(I,J,K)+	00247900
& VIS(IM1,JM1,K)+VIS(I,JM1,K))/4.0	00248000
	00248100
VISF=(VIS(I,J,KP1)+VIS(I,J,K)+	00248200
& VIS(I,JM1,KP1)+VIS(I,JM1,K))/4.0	00248300
VISB=(VIS(I,J,KM1)+VIS(I,J,K)+	00248400
& VIS(I,JM1,KM1)+VIS(I,JM1,K))/4.0	00248500
	00248600
	00248700
	00248800
VISN1=ZXOYN*VISN	00248900
VISS1=ZXOYS*VISS	00249000
VISE1=YZOXE*VISE	00249100
VISW1=YZOXW*VISW	00249200
VISF1=XYOZF*VISF	00249300
VISB1=XYOZB*VISB	00249400
	00249500
	00249600
C CEP=(ABS(CE)-CN)*DXP1*DXI/(DXE*(DXE+DXW))/8.	00249700
CEM=(ABS(CE)-CN)*DXP1*DXI/(DXE*(DXE+DXE))/8.	00249800
CWP=(ABS(CW)+CW)*DXM1*DXI/(DXW*(DXW+DXW))/8.	00249900
CWM=(ABS(CW)-CW)*DXM1*DXI/(DXW*(DXW+DXE))/8.	00250000
	00250100
C CNP=(ABS(CN)+CN)*DYN/DYJ/16.	00250200
CNM=(ABS(CN)-CN)*DYN/DYJ/16.	00250300
CSP=(ABS(CS)-CS)*DYS/DYM1/16.	00250400
CSM=(ABS(CS)-CS)*DYS/DYJ/16.	00250500
	00250600
	00250700
C CFP=(ABS(CF)-CB)*DZP1*DZK/(DZF*(DZF+DZB))/8.	00250800

	CFM=(ABS(CF)-CF)*DZP1*DZK/(DZF*(DZF+DZFF))/8.	00250900
	CBP=(ABS(CB)+CB)*DZM1*DZK/(DZB*(DZB+DZBB))/8.	00251000
	CBM=(ABS(CB)-CB)*DZM1*DZK/(DZB*(DZB+DZF))/8.	00251100
C		00251200
C		00251300
	AE(I,J,K)=-.5*DXI/DXE*CE+CEP+CEM*(1.+DXE/DXEE)+CWM*DXW/DXE+VISE1	00251400
	AW(I,J,K)=.5*DXI/DXW*CW+CWM+CWP*(1.+DXW/DXWW)+CEP*DZE/DXW+VISW1	00251500
C		00251600
	AN(I,J,K)=-.5*CN+CNP+CNM*(1.+DYN/DYNN)+CSM*DYS/DYN+VISN1	00251700
C		00251800
	AS(I,J,K)=.5*CS+CSM+CSP*(1.+DYS/DYSS)+CNP*DYN/DYS+VISS1	00251810
	AF(I,J,K)=-.5*DZK/DZF*CF-CFP+CFM*(1.+DZF/DZFF)+CBM*DZB/DZF+VISF1	00251820
C		00251830
	AB(I,J,K)=.5*DZK/DZB*CB+CBM+CBP*(1.+DZB/DZBB)+CFP*DZF/DZB+VISB1	00251840
		00251900
801	AEE=-CEM*DZE/DXEE	00252000
	AEER=AEE*VPD(IP2,J,K)	00252100
802	CONTINUE	00252200
		00252300
803	AWW=-CWP*DXW/DXWW	00252400
	AWWR=AWW*VPD(IM2,J,K)	00252500
804	CONTINUE	00252600
		00252700
	IF(J.LT.NJ) GOTO 805	00252800
	ANN=0.	00252900
	ANNR=0.	00253000
	GOTO 806	00253100
805	ANN=-CNM*DYN/DYNN	00253200
	ANNR=ANN*VPD(I,JP2,K)	00253300
806	CONTINUE	00253400
		00253500
	IF(J.GT.3) GOTO 807	00253600
	ASS=0.	00253700
	ASSR=0.	00253800
	GOTO 808	00253900
807	ASS=-CSP*DYS/DYSS	00254000
	ASSR=ASS*VPD(I,JM2,K)	00254100
808	CONTINUE	00254200
		00254300
	IF(K.LT.NK) GOTO 809	00254400
	AFF=0.	00254500
	AFFR=0.	00254600
	GOTO 810	00254700
809	AFF=-CFM*DZF/DZFF	00254800
	AFFR=AFF*VPD(I,J,KP2)	00254900
810	CONTINUE	00255000
		00255100
	IF(K.GT.2) GOTO 811	00255200
	ABB=0.	00255300
	ABBR=0.	00255400
	GOTO 812	00255500
811	ABB=-CBP*DZB/DZBB	00255600
	ABBR=ABB*VPD(I,J,KM2)	00255700
812	CONTINUE	00255800
		00255900
		00256000
		00256100
C	*****	00256200
C	*****	00256300
C	*** MODIFICATION FOR DECK BOUNDARIES	00256400
		00256500
900	CONTINUE	00256600
	IF(NOD(IM1,J,K).EQ.0) GOTO 901	00256700
	AWW=0.0	00256800
	AWWR=0.0	00256900
		00257000
901	CONTINUE	00257100
	IF(NOD(IP1,J,K).EQ.0) GOTO 902	00257200


```

      AEE=0.0
      AEER=C.0
902  CONTINUE
      IF (NOD(I,JM2,K).EQ.0) GOTO 903
      ASS=0.0
      ASSR=0.0
903  CONTINUE
      IF (NOD(I,JP1,K).EQ.0) GOTO 904
      ANN=0.0
      ANNR=0.0
904  CONTINUE
      IF (NOD(I,J,KM1).EQ.0) GOTO 905
      ABB=0.0
      ABBR=0.0
905  CONTINUE
      IF (NOD(I,J,KP1).EQ.0) GOTO 906
      AFF=0.0
      AFFR=0.0
906  CONTINUE

C *****
C *****

C ***      SU FROM NORMAL STRESS

      RN=(SIG22(I,J,K)-(V(I,JP1,K)-V(I,J,K))*VISN/DYN)*DZXN
      RS=(SIG22(I,JM1,K)-(V(I,J,K)-V(I,JM1,K))*VISS/DYS)*DZXS
      RE=(SIG12(IP1,J,K)-(V(IP1,J,K)-V(I,J,K))*VISE/DXE)*DYZE
      RW=(SIG12(I,J,K)-(V(I,J,K)-V(IM1,J,K))*VISW/DXW)*DYZW
      RF=(SIG23(I,J,KP1)-(V(I,J,KP1)-V(I,J,K))*VISF/DZF)*DXYF
      RB=(SIG23(I,J,K)-(V(I,J,K)-V(I,J,KM1))*VISB/DZB)*DXYB

C ***      SU FROM CURVED STRESSES AND ACCELERATIONS

      AVG12=0.5*(SIG12(IP1,J,K)+SIG12(I,J,K))
      AVG23=0.5*(SIG23(I,J,KP1)+SIG23(I,J,K))
      AVG11=SILIN(SIG11(I,J,K),SIG11(I,JM1,K),DYN,DYS)
      AVG33=SILIN(SIG33(I,J,K),SIG33(I,JM1,K),DYN,DYS)

      AU2=V(I,J,K)
      AU1=BILIN(U(IP1,J,K),U(I,J,K),DXI,DXI,
&      U(IP1,JM1,K),U(I,JM1,K),DXI,DXI,DYN,DYS)
      AU3=BILIN(W(I,J,KP1),W(I,J,K),DZK,DZK,
&      W(I,JM1,KP1),W(I,JM1,K),DZK,DZK,DYN,DYS)

      AR=SILIN(R(I,J,K),R(I,JM1,K),DYN,DYS)

      ARU12=AR*AU1*AU2
      ARU23=AR*AU2*AU3
      ARU11=AR*AU1*AU1
      ARU33=AR*AU3*AU3

      RRX=(AVG12-ARU12)*DZK*(DYE-DYW)
      RRZ=(AVG23-ARU23)*DXI*(DYF-DYB)
      RRY=(AVG11-ARU11)*DZK*(DXN-DXS)+
&      (AVG33-ARU33)*DXI*(DZN-DZS)

      AP(I,J,K)=AE(I,J,K)+AW(I,J,K)+AN(I,J,K)+AS(I,J,K)
&      -AF(I,J,K)-AB(I,J,K)+AEE-AWW-ANN+ASS+AEE-ABB
      SP(I,J,K)=-(ROD(I,J,K)*DYS+ROD(I,JM1,K)*DYN)/(DYS-DYN)*VOLDT
      SC(I,J,K)=-(ROD(I,J,K)*DYS-ROD(I,JM1,K)*DYN)/(DYS-DYN)*VOLDT

```

&	*VOD(I,J,K)	00264100
		00264200
	SU(I,J,K)=SU(I,J,K)+DZK*DXI*(P(I,JM1,K)-P(I,J,K))	00264300
&	+AEER+AWWR+ANNR+ASSR+AFFR+ABBR	00264400
&	+RE-RW+RN-RS+RF-RB+RRX+RRZ-RRY	00264500
&	-BUOY*((R(I,J,K)-REQ(I,J,K))*DYS+(R(I,JM1,K)	00264600
&	-REQ(I,JM1,K))*DYN)/(DYS+DYN)*VOL*SIN(ZC(K))*SIN(XC(I))	00264700
100	CONTINUE	00264800
		00264900
		00265000
C ***	TAKE CARE OF B.C. THRU AN,AS,AE,AW,AF,AB,SP AND SU	00265100
C		00265200
C ***	RADIUS DIRECTION	00265300
		00265400
	DO 500 K=2,NK	00265500
	DO 500 I=2,NI	00265600
CC	SP(I,3,K)=SP(I,3,K)+AS(I,3,K)	00265700
	SU(I,3,K)=SU(I,3,K)+AS(I,3,K)*V(I,2,K)	00265800
	AS(I,3,K)=0.	00265900
	AN(I,NJ,K)=0.	00266000
500	CONTINUE	00266100
		00266200
C ***	CYCLIC CONDITIONS	00266300
		00266400
	DO 502 K=2,NK	00266500
	DO 502 J=3,NJ	00266600
	SU(2,J,K)=SU(2,J,K)+AW(2,J,K)*V(1,J,K)	00266700
	SU(NI,J,K)=SU(NI,J,K)+AE(NI,J,K)*V(NIP1,J,K)	00266800
	AW(2,J,K)=0.0	00266900
	AE(NI,J,K)=0.0	00267000
502	CONTINUE	00267100
		00267200
C ***	FRONT AND BACK WALL	00267300
		00267400
	DO 600 I=2,NI	00267500
	DO 600 J=3,NJ	00267600
	JM1=J-1	00267700
		00267800
C ***	SLIP WALLS	00267900
	SP(I,J,2)=SP(I,J,2)+AB(I,J,2)	00268000
	SP(I,J,NK)=SP(I,J,NK)+AF(I,J,NK)	00268100
		00268200
	AF(I,J,NK)=0.	00268300
	AB(I,J,2)=0.	00268400
600	CONTINUE	00268500
		00268600
		00268700
		00268800
C	*****	00268900
C ***	MODIFICATION FOR DECK BOUNDARIES	00269000
		00269100
	DO 101 N=1,NCHIP	00269200
	IB=ICHPB(N)	00269300
	IE=IB+NCHIP(N)-1	00269400
	IBM1=IB-1	00269500
	IEP1=IE-1	00269600
	JB=JCHPB(N)	00269700
	JE=JB+NCHPB(N)-1	00269800
	JBM1=JB-1	00269900
	JEP1=JE-1	00270000
	KB=KCHPB(N)	00270100
	KE=KB+NCHPB(N)-1	00270200
	KBM1=KB-1	00270300
	KEP1=KE-1	00270400
		00270500
	DO 102 J=JB,JE	00270600
	DO 102 K=KB,KE-1	00270700
	SP(IBM1,J,K)=SP(IBM1,J,K)-AE(IBM1,J,K)	00270800

AE (IBM1,J,K)=0.0	00270900
SP (IE,J,K)=SP (IE,J,K)-AW (IE,J,K)	00271000
AW (IE,J,K)=0.0	00271100
102 CONTINUE	00271200
	00271300
	00271400
DO 103 I=IB,IE-1	00271500
DO 103 K=KB,KE-1	00271600
AN (I,JBMI,K)=0.0	00271700
AS (I,JEPI,K)=0.0	00271800
103 CONTINUE	00271900
	00272000
DO 106 I=IB,IE-1	00272100
DO 106 J=JB,JE	00272200
SP (I,J,KBM1)=SP (I,J,KBM1)-AF (I,J,KBM1)	00272300
AF (I,J,KBM1)=0.0	00272400
	00272500
SP (I,J,KE)=SP (I,J,KE)-AB (I,J,KE)	00272600
AB (I,J,KE)=0.0	00272700
106 CONTINUE	00272800
	00272900
	00273000
C *****	00273100
C *****	00273200
C *** MODIFICATION FOR THE CELLS INSIDE OF THE DECKS	00273300
	00273400
DO 104 I=IB,IE-1	00273500
DO 104 J=JB,JE	00273600
DO 104 K=KB,KE-1	00273700
SP (I,J,K)=-1.0E20	00273800
AW (I,J,K)=0.	00273900
AE (I,J,K)=0.	00274000
AS (I,J,K)=0.	00274100
AN (I,J,K)=0.	00274200
SU (I,J,K)=0.	00274300
104 CONTINUE	00274400
101 CONTINUE	00274500
105 CONTINUE	00274600
	00274700
	00274800
	00274900
C *****	00275000
C *****	00275100
C *****	00275200
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00275300
	00275400
DO 300 K=2,NK	00275500
DO 300 J=3,NJ	00275600
DO 300 I=2,NI	00275700
DXI=XI (I,J,K,2,0)	00275800
DZK=ZI (I,J,K,2,0)	00275900
DZX=DZK*DXI	00276000
AP (I,J,K)=AP (I,J,K)-SP (I,J,K)	00276100
DV (I,J,K)=DZX/AP (I,J,K)	00276200
300 CONTINUE	00276300
	00276400
	00276500
C *** SOLVE FOR V	00276600
	00276700
	00276800
CALL TRID (2,3,2,NI,NJ,NK,V)	00276900
	00277000
	00277100
DO 74 I=2,NIP1	00277200
DO 74 J=2,NJP1	00277300
V (I,J,1)=V (I,J,2)	00277400
V (I,J,NKP1)=V (I,J,NK)	00277500
74 CONTINUE	00277600

DO 79 I=1,NIP1	00277700
DO 79 K=1,NKP1	00277800
C V(I,2,K)=V(I,3,K)	00277900
79 CONTINUE	00278000
	00278100
	00278200
IF (NCHIP.EQ.0) GOTO 112	00278300
C *****	00278400
C *****	00278500
C *** RESET THE VELOCITY INSIDE OF THE DECKS	00278600
C	00278700
C	00278800
DO 110 N=1,NCHIP	00278900
IB=ICHBP(N)	00279000
IE=IB+NCHPI(N)-1	00279100
JB=JCHBP(N)	00279200
JE=JB+NCHPJ(N)-1	00279300
KB=KCHBP(N)	00279400
KE=KB+NCHPK(N)-1	00279500
DO 108 I=IB,IE-1	00279600
DO 108 J=JB,JE	00279700
DO 108 K=KB,KE-1	00279800
V(I,J,K)=0.0	00279900
108 CONTINUE	00280000
110 CONTINUE	00280100
112 CONTINUE	00280200
C *****	00280300
C *****	00280400
RETURN	00280500
END	00280600
	00280700
	00280800
	00280900
C	00281000
C	00281100
C	00281200
SUBROUTINE CALW	00281300
C *****	00281400
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00281500
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYXS(93),DZZS(93)	00281600
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR	00281700
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00281800
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00281900
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER	00282000
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,	00282100
& CPC,PRT,CONDC,VISC,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIR	00282200
COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32)	00282300
& ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32)	00282400
COMMON/BL22/ICHBP(10),NCHPI(10),JCHBP(10),NCHPJ(10),KCHPB(10),	00282500
& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)	00282600
COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)	00282700
& ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)	00282800
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)	00282900
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)	00283000
COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)	00283100
& ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)	00283200
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),	00283300
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),	00283400
& DU(22,16,32),DV(22,16,32),DW(22,16,32)	00283500
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32),	00283600
& AS(22,16,32),AF(22,16,32),AB(22,16,32),	00283700
& SP(22,16,32),SU(22,16,32),RI(22,16,32)	00283800
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)	00283900
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)	00284000
	00284100
C *** CALCULATE COEFFICIENTS	00284200
	00284300

DO 100 K=3,NK	00284400
KP2=K+2	00284500
KP1=K+1	00284600
KM1=K-1	00284700
KM2=K-2	00284800
DO 100 J=2,NJ	00284900
JP2=J+2	00285000
JP1=J+1	00285100
JM1=J-1	00285200
JM2=J-2	00285300
DO 100 I=2,NI	00285400
IP2=I+2	00285500
IP1=I+1	00285600
IM1=I-1	00285700
IM2=I-2	00285800
IF (I.EQ.2) IM2=NIM1	00285900
IF (I.EQ.NI) IP2=3	00286000
	00286100
C CENTRAL LENGTH OF THE SCALE CONTROL VOLUME	00286200
	00286300
	00286400
DXP1=XL(IP1,J,K,3,C)	00286500
DXI =XL(I ,J,K,3,0)	00286600
DXM1=XL(IM1,J,K,3,0)	00286700
	00286800
DYP1=YI(I,JP1,K,3,0)	00286900
DYJ =YI(I,J ,K,3,0)	00287000
DYM1=YI(I,JM1,K,3,0)	00287100
	00287200
DZP1=ZL(I,J,KP1,3,0)	00287300
DZK =ZL(I,J,K ,3,0)	00287400
DZM1=ZL(I,J,KM1,3,0)	00287500
	00287600
C *** SURFACE LENGTH OF THE CONTROL VOLUME	00287700
	00287800
	00287900
DXN=XL(I,JP1,K,3,2)	00288000
DXS=XL(I,J ,K,3,2)	00288100
DXF=XL(I,J,KP1,3,3)	00288200
DXB=XL(I,J,K ,3,3)	00288300
	00288400
DYF=YI(I,J,KP1,3,3)	00288500
DYB=YI(I,J,K ,3,3)	00288600
DYE=YI(IP1,J,K,3,1)	00288700
DYW=YI(I ,J,K,3,1)	00288800
	00288900
DZE=ZL(IP1,J,K,3,1)	00289000
DZW=ZL(I ,J,K,3,1)	00289100
DZN=ZL(I,JP1,K,3,2)	00289200
DZS=ZL(I,J ,K,3,2)	00289300
C *** CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME	00289400
	00289500
	00289600
DXEE=XL(IP2,J,K,3,1)	00289700
DXE =XL(IP1,J,K,3,1)	00289800
DXW =XL(I ,J,K,3,1)	00289900
DXWW=XL(IM1,J,K,3,1)	00290000
	00290100
DYNN=YI(I,JP2,K,3,2)	00290200
DYN =YI(I,JP1,K,3,2)	00290300
DYS =YI(I,J ,K,3,2)	00290400
DYSS=YI(I,JM1,K,3,2)	00290500
	00290600
DZFF=ZL(I,J,KP2,3,3)	00290700
DZF =ZL(I,J,KP1,3,3)	00290800
DZB =ZL(I,J,K ,3,3)	00290900
DZBB=ZL(I,J,KM1,3,3)	00291000
	00291100
C *** DEFINE THE AREA OF THE CONTROL VOLUME	

DXYF=DXF*DYF	00291200
DXYB=DXB*DYB	00291300
DYZE=DYB*DZE	00291400
DYZW=DYW*DZW	00291500
DZXN=DZN*DXN	00291600
DZXS=DZS*DXS	00291700
	00291800
VCL=DXI*DYJ*DZK	00291900
VCLDT=VCL/DTIME	00292000
	00292100
ZXOYN=DZXN/DYN	00292200
ZXOYS=DZXS/DYS	00292300
XYOZF=DXYF/DZF	00292400
XYOZB=DXYB/DZB	00292500
YZOXE=DYZE/DXE	00292600
YZOXW=DYZW/DXW	00292700
	00292800
	00292900
	00293000
C *** USE SINGLE AND BI-LINEAR INTERPOLATION TO EVALUATE	00293100
C & PHYSICAL PROPERTIES AND FLUX ON THE SURFACES.	00293200
	00293300
	00293400
GNF=SILIN(R(I,JP1,K),R(I,J,K),DYP1,DYJ)*V(I,JP1,K)	00293500
GNB=SILIN(R(I,JP1,KM1),R(I,J,KM1),DYP1,DYJ)*V(I,JP1,KM1)	00293600
GSF=SILIN(R(I,JM1,K),R(I,J,K),DYM1,DYJ)*V(I,J,K)	00293700
GSB=SILIN(R(I,JM1,KM1),R(I,J,KM1),DYM1,DYJ)*V(I,J,KM1)	00293800
	00293900
GF =SILIN(R(I,J,KP1),R(I,J,K),DZFF,DZF)*W(I,J,KP1)	00294000
GP =SILIN(R(I,J,KM1),R(I,J,K),DZB,DZF)*W(I,J,K)	00294100
GB =SILIN(R(I,J,KM2),R(I,J,KM1),DZBB,DZB)*W(I,J,KM1)	00294200
	00294300
GEF=SILIN(R(IP1,J,K),R(I,J,K),DXP1,DXI)*U(IP1,J,K)	00294400
GEB=SILIN(R(IP1,J,KM1),R(I,J,KM1),DXP1,DXI)*U(IP1,J,KM1)	00294500
GWF=SILIN(R(IM1,J,K),R(I,J,K),DXM1,DXI)*U(I,J,K)	00294600
GWB=SILIN(R(IM1,J,KM1),R(I,J,KM1),DXM1,DXI)*U(I,J,KM1)	00294700
	00294800
CF=0.5*(GF+GP)*DXYF	00294900
CB=0.5*(GP+GB)*DXYB	00295000
	00295100
CN=SILIN(GNF,GNB,DZF,DZB)*DZXN	00295200
CS=SILIN(GSF,GSB,DZF,DZB)*DZXS	00295300
	00295400
CE=SILIN(GEF,GEB,DZF,DZB)*DYZE	00295500
CW=SILIN(GWF,GWB,DZF,DZB)*DYZW	00295600
	00295700
VISF=VIS(I,J,K)	00295800
VISB=VIS(I,J,KM1)	00295900
	00296000
VISN= (VIS(I,JP1,K)-VIS(I,J,K)+ & VIS(I,JP1,KM1)+VIS(I,J,KM1))/4.0	00296100
VISS= (VIS(I,JM1,K)-VIS(I,J,K)+ & VIS(I,JM1,KM1)+VIS(I,J,KM1))/4.0	00296200
	00296300
VISE= (VIS(IP1,J,K)+VIS(I,J,K)+ & VIS(IP1,J,KM1)+VIS(I,J,KM1))/4.0	00296400
VISW= (VIS(IM1,J,K)+VIS(I,J,K)+ & VIS(IM1,J,KM1)+VIS(I,J,KM1))/4.0	00296500
	00296600
	00296700
	00296800
	00296900
	00297000
	00297100
VISN1=ZXOYN*VISN	00297200
VISS1=ZXOYS*VISS	00297300
VISE1=YZOXE*VISE	00297400
VISW1=YZOXW*VISW	00297500
VISF1=XYOZF*VISF	00297600
VISB1=XYOZB*VISB	00297700
	00297800
	00297900

	CEP=(ABS(CE)+CE)*DXP1*DXI/(DXE*(DXE+DXW))/8.	00298000
	CEM=(ABS(CE)-CE)*DXP1*DXI/(DXE*(DXE+DXEE))/8.	00298100
	CWP=(ABS(CW)+CW)*DXM1*DXI/(DXW*(DXW+DXWW))/8.	00298200
	CWM=(ABS(CW)-CW)*DXM1*DXI/(DXW*(DXW+DXE))/8.	00298300
C		00298400
	CNP=(ABS(CN)+CN)*DYP1*DYJ/(DYN*(DYN+DYS))/8.	00298500
	CNM=(ABS(CN)-CN)*DYP1*DYJ/(DYN*(DYN+DYNN))/8.	00298600
	CSP=(ABS(CS)+CS)*DYM1*DYJ/(DYS*(DYS+DYSS))/8.	00298700
	CSM=(ABS(CS)-CS)*DYM1*DYJ/(DYS*(DYS+DYN))/8.	00298800
C		00298900
C		00299000
	CFP=(ABS(CF)+CF)*DZF/DZK/16.	00299100
	CFM=(ABS(CF)-CF)*DZF/DZP1/16.	00299200
	CBP=(ABS(CB)+CB)*DZB/DZM1/16.	00299300
	CBM=(ABS(CB)-CB)*DZB/DZK/16.	00299400
C		00299500
	AE(I,J,K)=-.5*DXI/DXE*CE+CEP+CEM*(1.+DXE/DXEE)+CWM*DXW/DXE+VISE1	00299600
	AW(I,J,K)=.5*DXI/DXW*CW+CWM+CWP*(1.+DXW/DXWW)+CEP*DXE/DXW+VISW1	00299700
	AN(I,J,K)=-.5*DYJ/DYN*CN+CNP+CNM*(1.+DYN/DYNN)+CSM*DYS/DYN+VISN1	00299800
	AS(I,J,K)=.5*DYJ/DYS*CS+CSM+CSP*(1.+DYS/DYSS)+CNP*DYN/DYS+VISS1	00299900
C		00300000
	AF(I,J,K)=-.5*CF+CFP+CFM*(1.+DZF/DZFF)+CBM*DZB/DZF+VISF1	00300100
C		00300110
	AB(I,J,K)=.5*CB+CBM+CBP*(1.+DZB/DZBB)+CFP*DZF/DZB+VISB1	00300120
		00300200
801	AEE=-CEM*DXE/DXEE	00300300
	AEER=AEE*WPD(IP2,J,K)	00300400
802	CONTINUE	00300500
		00300600
803	AWW=-CWP*DXW/DXWW	00300700
	AWWR=AWW*WPD(IM2,J,K)	00300800
804	CONTINUE	00300900
		00301000
	IF(J.LT.NJ) GOTO 805	00301100
	ANN=0.	00301200
	ANNR=0.	00301300
	GOTO 806	00301400
805	ANN=-CNM*DYN/DYNN	00301500
	ANNR=ANN*WPD(I,JP2,K)	00301600
806	CONTINUE	00301700
		00301800
	IF(J.GT.2) GOTO 807	00301900
	ASS=0.	00302000
	ASSR=0.	00302100
	GOTO 808	00302200
807	ASS=-CSP*DYS/DYSS	00302300
	ASSR=ASS*WPD(I,JM2,K)	00302400
808	CONTINUE	00302500
		00302600
	IF(K.LT.NK) GOTO 809	00302700
	AFF=0.	00302800
	AFFR=0.	00302900
	GOTO 810	00303000
809	AFF=-CFM*DZF/DZFF	00303100
	AFFR=AFF*WPD(I,J,KP2)	00303200
810	CONTINUE	00303300
		00303400
	IF(K.GT.3) GOTO 811	00303500
	ABB=0.	00303600
	ABBR=0.	00303700
	GOTO 812	00303800
811	ABB=-CBP*DZB/DZBB	00303900
	ABBR=ABB*WPD(I,J,KM2)	00304000
812	CONTINUE	00304100
		00304200
		00304300
C	#####	00304400
C	#####	00304500

C *** MODIFICATION FOR DECK BOUNDARIES

```

900 CONTINUE
  IF (NOD(IM1,J,K).EQ.0) GOTO 901
  AWW=0.0
  AWR=0.0

901 CONTINUE
  IF (NOD(IP1,J,K).EQ.0) GOTO 902
  AEE=0.0
  AEER=0.0

902 CONTINUE
  IF (NOD(I,JM1,K).EQ.0) GOTO 903
  ASS=0.0
  ASSR=0.0

903 CONTINUE
  IF (NOD(I,JP1,K).EQ.0) GOTO 904
  ANN=0.0
  ANNR=0.0

904 CONTINUE
  IF (NOD(I,J,KM2).EQ.0) GOTO 905
  ABB=0.0
  ABBR=0.0

905 CONTINUE
  IF (NOD(I,J,KP1).EQ.0) GOTO 906
  AFF=0.0
  AFFR=0.0

906 CONTINUE

```

C *****
C *****

C *** SU FROM NORMAL STRESS

```

RF=(SIG33(I,J,K)-(W(I,J,KP1)-W(I,J,K))*VISF/DZF)*DXYF
RB=(SIG33(I,J,KM1)-(W(I,J,K)-W(I,J,KM1))*VISB/DZB)*DXYB
RN=(SIG23(I,JP1,K)-(W(I,JP1,K)-W(I,J,K))*VISN/DYN)*DZXN
RS=(SIG23(I,J,K)-(W(I,J,K)-W(I,JM1,K))*VISS/DYS)*DZXS
RE=(SIG13(IP1,J,K)-(W(IP1,J,K)-W(I,J,K))*VISE/DXE)*DYZE
RW=(SIG13(I,J,K)-(W(I,J,K)-W(IM1,J,K))*VISW/DXW)*DYZW

```

C *** SU FROM CURVED STRESSES AND ACCELERATIONS

```

AVG23=0.5*(SIG23(I,JP1,K)+SIG23(I,J,K))
AVG13=0.5*(SIG13(IP1,J,K)+SIG13(I,J,K))
AVG22=SILIN(SIG22(I,J,K),SIG22(I,J,KM1),DZF,DZB)
AVG11=SILIN(SIG11(I,J,K),SIG11(I,J,KM1),DZF,DZB)

AU3=W(I,J,K)
AU2=BILIN(V(I,JP1,K),V(I,J,K),DYJ,DYJ,
& V(I,JP1,KM1),V(I,J,KM1),DYJ,DYJ,DZF,DZB)
AU1=BILIN(U(IP1,J,K),U(I,J,K),DXI,DXI,
& U(IP1,J,KM1),U(I,J,KM1),DXI,DXI,DZF,DZB)

AR=SILIN(R(I,J,K),R(I,J,KM1),DZF,DZB)

ARU23=AR*AU2*AU3
ARU13=AR*AU1*AU3
ARU22=AR*AU2*AU2
ARU11=AR*AU1*AU1

RRY=(AVG23-ARU23)*DXI*(DZN-DZS)
RRX=(AVG13-ARU13)*DYJ*(DZE-DZW)

```

00304600
00304700
00304800
00304900
00305000
00305100
00305200
00305300
00305400
00305500
00305600
00305700
00305800
00305900
00306000
00306100
00306200
00306300
00306400
00306500
00306600
00306700
00306800
00306900
00307000
00307100
00307200
00307300
00307400
00307500
00307600
00307700
00307800
00307900
00308000
00308100
00308200
00308300
00308400
00308500
00308600
00308700
00308800
00308900
00309000
00309100
00309200
00309300
00309400
00309500
00309600
00309700
00309800
00309900
00310000
00310100
00310200
00310300
00310400
00310500
00310600
00310700
00310800
00310900
00311000
00311100
00311200
00311300

```

PRZ=(AVG22-ARU22)*DXI*(DYF-DYB)+
& (AVG11-ARU11)*DYJ*(DXF-DXB)

AP(I,J,K)=AE(I,J,K)+AW(I,J,K)+AN(I,J,K)+AS(I,J,K)
& -AF(I,J,K)+AB(I,J,K)+AEE+AWW+ANN+ASS+AFF+ABB
SP(I,J,K)=-(ROD(I,J,K)*DZB+ROD(I,J,KM1)*DZF)/(DZB+DZF)*VOLDT
SU(I,J,K)=(ROD(I,J,K)*DZB+ROD(I,J,KM1)*DZF)/(DZB+DZF)*VOLDT
& *WOD(I,J,K)
SU(I,J,K)=SU(I,J,K)+DXI*DYJ*(P(I,J,KM1)-P(I,J,K))
& +AEER+AWWR+ANNR+ASSR+AFFR+ABBR
& +RE-RW+RN-RS+RF-RB+RRY+RRX-RRZ
& -BUOY*((R(I,J,K)-REQ(I,J,K))*DZB*COS(ZC(K)))+(R(I,J,
& KM1)-REQ(I,J,KM1))*DZF*COS(ZC(KM1)))/(DZB+DZF)*VOL*SIN(XC(I))
100 CONTINUE

C *** TAKE CARE OF B.C. THRU AN,AS,AE,AW,AP AND SU
C
C *** RADIUS DIRECTION

DO 500 K=3,NK
DO 500 I=2,NI
KM1=K-1
CC SP(I,2,K)=SP(I,2,K)+AS(I,2,K)
SP(I,2,K)=SP(I,2,K)-AS(I,2,K)
SU(I,2,K)=SU(I,2,K)+2.0*W(I,1,K)*AS(I,2,K)
SP(I,NJ,K)=SP(I,NJ,K)-AN(I,NJ,K)
AS(I,2,K)=0.
AN(I,NJ,K)=0.
500 CONTINUE

C *** CYLIC CONDITIONS

DO 502 K=3,NK
DO 502 J=2,NJ
SU(2,J,K)=SU(2,J,K)+AW(2,J,K)*W(1,J,K)
SU(NI,J,K)=SU(NI,J,K)+AE(NI,J,K)*W(NIP1,J,K)
AW(2,J,K)=0.0
AE(NI,J,K)=0.0
502 CONTINUE

C *** FRONT AND BACK WALL

DO 600 I=2,NI
DO 600 J=2,NJ
SP(I,J,NK)=SP(I,J,NK)+AF(I,J,NK)
SP(I,J,3)=SP(I,J,3)-AB(I,J,3)
AF(I,J,NK)=0.
AB(I,J,3)=0.
600 CONTINUE

IF (NCHIP.EQ.0) GOTO 105

C *****
C *****
C *** MODIFICATION FOR DECK BOUNDARIES

DO 101 N=1,NCHIP
IB=ICHPB(N)
IE=IB-NCHPI(N)-1
IBM1=IB-1
IEP1=IE-1
JB=JCHPB(N)
JE=JB-NCHPJ(N)-1
JBM1=JB-1
JEP1=JE-1
KB=KCHPB(N)
KE=KB-NCHPK(N)-1

```


KBM1=KB-1	00318200
KEP1=KE+1	00318300
	00318400
	00318493
DO 102 J=JB,JE-1	00318500
DO 102 K=KB,KE	00318600
SP(IBM1,J,K)=SP(IBM1,J,K)-AE(IBM1,J,K)	00318700
SU(IBM1,J,K)=SU(IBM1,J,K)+AE(IBM1,J,K)*WFAN(N)*2.0	00318710
AE(IBM1,J,K)=0.0	00318800
	00318900
	00319000
SP(IE,J,K)=SP(IE,J,K)-AW(IE,J,K)	00319100
SU(IE,J,K)=SU(IE,J,K)+AW(IE,J,K)*WFAN(N)*2.0	00319110
AW(IE,J,K)=0.0	00319200
	00319300
102 CONTINUE	00319400
	00319500
DO 103 I=IB,IE-1	00319600
DO 103 K=KB,KE	00319700
SP(I,JBM1,K)=SP(I,JBM1,K)-AN(I,JBM1,K)	00319800
SU(I,JBM1,K)=SU(I,JBM1,K)+AN(I,JBM1,K)*WFAN(N)*2.0	00319810
AN(I,JBM1,K)=0.0	00319900
	00320000
SP(I,JE,K)=SP(I,JE,K)-AS(I,JE,K)	00320100
SU(I,JE,K)=SU(I,JE,K)+AS(I,JE,K)*WFAN(N)*2.0	00320110
AS(I,JE,K)=0.0	00320200
103 CONTINUE	00320300
	00320400
DO 106 I=IB,IE-1	00320500
DO 106 J=JB,JE-1	00320600
SU(I,J,KBM1)=SU(I,J,KBM1)+AF(I,J,KBM1)*WFAN(N)	00320610
SU(I,J,KEP1)=SU(I,J,KEP1)+AB(I,J,KEP1)*WFAN(N)	00320620
AF(I,J,KBM1)=0.0	00320700
AB(I,J,KEP1)=0.0	00320800
106 CONTINUE	00320900
	00321000
C *** FOR THE CELLS INSIDE OF THE DECKS	00321100
	00321200
DO 104 I=IB,IE-1	00321300
DO 104 J=JB,JE-1	00321400
DO 104 K=KB,KE	00321500
SP(I,J,K)=-1.0E2	00321600
AW(I,J,K)=0.	00321700
AE(I,J,K)=0.	00321800
AS(I,J,K)=0.	00321900
AN(I,J,K)=0.	00322000
AB(I,J,K) = 0.	
AF(I,J,K) = 0.	
SU(I,J,K)=1.0E2 * WFAN(N)	00322100
104 CONTINUE	00322200
101 CONTINUE	00322300
105 CONTINUE	00322400
	00322500
C *****	00322600
C *****	00322700
	00322800
	00322900
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00323000
	00323100
	00323200
DO 301 K=3,NK	00323300
DO 301 J=2,NJ	00323400
DO 301 I=2,NI	00323500
DXI=XL(I,J,K,3,0)	00323600
DYJ=YI(I,J,K,3,0)	00323700
DXY=DXI*DYJ	00323800
AP(I,J,K)=AP(I,J,K)-SP(I,J,K)	00323900
DW(I,J,K)=DXY/AP(I,J,K)	00324000

301 CONTINUE	00324100
	00324200
C *** SOLVE FOR W	00324300
	00324400
CALL TRID (2,2,3,NI,NJ,NK,W)	00324500
	00324600
C	00324700
DO 76 I=1,NI	00324800
DO 76 J=1,NJ	00324900
W(I,J,2)=W(I,J,3)	00325000
W(I,J,NKP1)=W(I,J,NK)	00325100
76 CONTINUE	00325200
	00325300
	00325400
	00325500
IF (NCHIP.EQ.0) GOTO 112	00325600
C *****	00325700
C *****	00325800
C *** RESET THE VELOCITY INSIDE OF THE DECKS	00325900
	00326000
DO 110 N=1,NCHIP	00326100
IB=ICHPB(N)	00326200
IE=IB+NCHPI(N)-1	00326300
JB=JCHPB(N)	00326400
JE=JB+NCHPJ(N)-1	00326500
KB=KCHPB(N)	00326600
KE=KB+NCHPK(N)-1	00326700
DO 108 I=IB,IE-1	00326800
DO 108 J=JB,JE-1	00326900
DO 108 K=KB,KE	00327000
W(I,J,K)=WFAN(N)	00327100
108 CONTINUE	00327200
110 CONTINUE	00327300
112 CONTINUE	00327400
	00327500
RETURN	00327600
END	00327700
	00327800
	00327900
C	00328000
C	00328100
SUBROUTINE CALP	00328200
C	00328300
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00328400
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00328500
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,P1,Q,QR	00328600
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00328700
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00328800
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER	00328900
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY,	00329000
& CPC,PRT,COND,VISQ,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIR	00329100
COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),	00329200
& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)	00329300
COMMON/BL31/ TOD(22,16,32),ROD(22,16,32),POD(22,16,32)	00329400
& ,COD(22,16,32),UOD(22,16,32),VOD(22,16,32),WOD(22,16,32)	00329500
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)	00329600
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)	00329700
COMMON/BL33/ TPD(22,16,32),RPD(22,16,32),PPD(22,16,32)	00329800
& ,CPD(22,16,32),UPD(22,16,32),VPD(22,16,32),WPD(22,16,32)	00329900
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),	00330000
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),	00330100
& DU(22,16,32),DV(22,16,32),DW(22,16,32)	00330200
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AX(22,16,32),	00330300
& AS(22,16,32),AF(22,16,32),AB(22,16,32),	00330400
& SP(22,16,32),SU(22,16,32),RI(22,16,32)	00330500
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)	00330600
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)	00330700
	00330800

C *** CALCULATE COEFFICIENTS

```
DO 100 K=2,NK
KP2=K-2
KP1=K-1
KM1=K-1
KM2=K-2
DO 100 J=2,NJ
JP2=J+2
JP1=J+1
JM1=J-1
JM2=J-2
DO 100 I=2,NI
IP2=I+2
IP1=I+1
IM1=I-1
IM2=I-2
IF (I.EQ.NI) IP1=2
```

C CENTRAL LENGTH OF THE SCALE CONTROL VOLUME

```
DXP1=XL(IP1,J,K,0,0)
DXI =XL(I ,J,K,0,0)
DXM1=XL(IM1,J,K,0,0)

DYP1=YI(I,JP1,K,0,0)
DYJ =YI(I,J ,K,0,0)
DYM1=YI(I,JM1,K,0,0)

DZP1=ZL(I,J,KP1,0,0)
DZK =ZL(I,J,K ,0,0)
DZM1=ZL(I,J,KM1,0,0)
```

C *** SURFACE LENGTH OF THE CONTROL VOLUME

```
DXN=XL(I,JP1,K,0,2)
DXS=XL(I,J ,K,0,2)
DXF=XL(I,J,KP1,0,3)
DXB=XL(I,J,K ,0,3)

DYF=YI(I,J,KP1,0,3)
DYB=YI(I,J,K ,0,3)
DYE=YI(IP1,J,K,0,1)
DYW=YI(I ,J,K,0,1)

DZE=ZL(IP1,J,K,0,1)
DZW=ZL(I ,J,K,0,1)
DZN=ZL(I,JP1,K,0,2)
DZS=ZL(I,J ,K,0,2)
```

C *** DEFINE AREA OF THE CONTROL VOLUME

```
DXYF=DXF*DYF
DXYB=DXB*DYB
DYZE=DYE*DZE
DYZW=DYW*DZW
DZXN=DZN*DXN
DZXS=DZS*DXS

VOL=DXI*DYJ*DZK
VOLDT=VOL/DTIME
```

```
RN=(R(I,J,K)*DYP1+R(I,JP1,K)*DYJ)/(DYP1-DYJ)
RS=(R(I,J,K)*DYM1+R(I,JM1,K)*DYJ)/(DYM1-DYJ)
RE=(R(I,J,K)*DXP1+R(IP1,J,K)*DXI)/(DXP1-DXI)
RW=(R(I,J,K)*DXM1+R(IM1,J,K)*DXI)/(DXM1-DXI)
```

```
00330900
00331000
00331100
00331200
00331300
00331400
00331500
00331600
00331700
00331800
00331900
00332000
00332100
00332200
00332300
00332400
00332500
00332600
00332700
00332800
00332900
00333000
00333100
00333200
00333300
00333400
00333500
00333600
00333700
00333800
00333900
00334000
00334100
00334200
00334300
00334400
00334500
00334600
00334700
00334800
00334900
00335000
00335100
00335200
00335300
00335400
00335500
00335600
00335700
00335800
00335900
00336000
00336100
00336200
00336300
00336400
00336500
00336600
00336700
00336800
00336900
00337000
00337100
00337200
00337300
00337400
00337500
00337600
```

RF=(R(I,J,K)*DZP1+R(I,J,KP1)*DZK)/(DZP1+DZK)	00337700
RB=(R(I,J,K)*DZM1+R(I,J,KM1)*DZK)/(DZM1+DZK)	00337800
C *** DU ON VERTICAL WALLS AND DV ON HORIZONTAL WALLS ARE ZERO	00337900
	00338000
AN(I,J,K)=RN*DZXN*DV(I,JP1,K)	00338100
AS(I,J,K)=RS*DZXS*DV(I,J,K)	00338200
AE(I,J,K)=RE*DYZE*DU(IP1,J,K)	00338300
AW(I,J,K)=RW*DYZW*DU(I,J,K)	00338400
AF(I,J,K)=RF*DXYF*DW(I,J,KP1)	00338500
AB(I,J,K)=RB*DXYB*DW(I,J,K)	00338600
	00338700
	00338800
CN=RN*V(I,JP1,K)*DZXN	00338900
CS=RS*V(I,J,K)*DZXS	00339000
CE=RE*U(IP1,J,K)*DYZE	00339100
CW=RW*U(I,J,K)*DYZW	00339200
CF=RF*W(I,J,KP1)*DXYF	00339300
CB=RB*W(I,J,K)*DXYB	00339400
	00339500
SMP(I,J,K)=-(R(I,J,K)-ROD(I,J,K))*VOL/DTIME-CE+CW-CN+CS-CF+CB	00339600
C SMP(I,J,K)=-CE+CW-CN+CS-CF+CB	00339700
SU(I,J,K)=SMP(I,J,K)	00339800
SP(I,J,K)=0.	00339900
100 CONTINUE	00340000
	00340100
C *** TAKE CARE OF B.C. THRU AN,AS,AE,AW,AF,AB,SP AND SU	00340200
C	00340300
C *** RADIUS DIRECTION	00340400
	00340500
DO 500 K=2,NK	00340600
DO 500 I=2,NI	00340700
AS(I,2,K)=0.	00340800
AN(I,NJ,K)=0.	00340900
500 CONTINUE	00341000
	00341100
C *** LEFT WALL AND RIGHT WALL	00341200
	00341300
DO 501 K=2,NK	00341400
DO 501 J=2,NJ	00341500
C AW(2,J,K)=0.	00341600
C AE(NI,J,K)=0.	00341700
501 CONTINUE	00341800
	00341900
C *** FRONT AND BACK WALL	00342000
	00342100
DO 502 I=2,NI	00342200
DO 502 J=2,NJ	00342300
AB(I,J,2)=0.0	00342400
AF(I,J,NK)=0.0	00342500
502 CONTINUE	00342600
	00342700
	00342800
	00342900
	00343000
IF (NCHIP.EQ.0) GOTO 105	00343100
	00343200
C #####	00343300
C #####	00343400
C *** MODIFICATION FOR DECK BOUNDARIES	00343500
	00343600
DO 101 N=1,NCHIP	00343700
IB=ICHPB(N)	00343800
IE=IB-NCHIP(N)-1	00343900
IBM1=IB-1	00344000
IEP1=IE-1	00344100
JB=JCHPB(N)	00344200
JE=JB-NCHIP(N)-1	00344300
JBML=JB-1	00344400

JEP1=JE-1	00344500
KB=KCHPB(N)	00344600
KE=KB+NCHPK(N)-1	00344700
KBM1=KB-1	00344800
KEP1=KE+1	00344900
	00345000
DO 102 J=JB,JE-1	00345100
DO 102 K=KB,KE-1	00345200
AE(IBM1,J,K)=0.0	00345300
AW(IE,J,K)=0.0	00345400
	00345500
102 CONTINUE	00345600
	00345700
DO 103 I=IB,IE-1	00345800
DO 103 K=KB,KE-1	00345900
AN(I,JBM1,K)=0.0	00346000
AS(I,JE,K)=0.0	00346100
103 CONTINUE	00346200
	00346300
DO 106 I=IB,IE-1	00346400
DO 106 J=JB,JE-1	00346500
AF(I,J,KBM1)=0.0	00346600
AB(I,J,KE)=0.0	00346700
106 CONTINUE	00346800
	00346900
C *** FOR THE CELLS INSIDE OF THE DECKS	00347000
	00347100
DO 104 I=IB,IE-1	00347200
DO 104 J=JB,JE-1	00347300
DO 104 K=KB,KE-1	00347400
SP(I,J,K)=-1.0E20	00347500
AW(I,J,K)=0.	00347600
AE(I,J,K)=0.	00347700
AS(I,J,K)=0.	00347800
AN(I,J,K)=0.	00347900
SU(I,J,K)=0.	00348000
104 CONTINUE	00348100
101 CONTINUE	00348200
105 CONTINUE	00348300
	00348400
	00348500
C *****	00348600
C *****	00348700
	00348800
	00348900
	00349000
C *** ASSEMBLE COEFFICIENTS AND SOLVE DIFFERENCE EQUATIONS	00349100
	00349200
DO 300 J=2,NJ	00349300
DO 300 I=2,NI	00349400
DO 300 K=2,NK	00349500
AP(I,J,K)=AN(I,J,K)+AS(I,J,K)+AE(I,J,K)+AW(I,J,K)-SP(I,J,K)	00349600
& -AE(I,J,K)+AB(I,J,K)	00349700
300 CONTINUE	00349800
	00349900
C *** SOLUTION OF FINITE DIFFERENCE EQUATION	00350000
	00350100
CALL TRID (2,2,2,NI,NJ,NK,PP)	00350200
	00350300
C *** THIS IS FOR CKECKING	00350400
	00350500
	00350600
DO 161 I=1,NIP1	00350700
C WRITE (6,*) :	00350800
949 FORMAT (' AW ')	00350900
C WRITE (6,949)	00351000
C WRITE (6,999) ((AW(I,J,K),K=1,NKP1),J=1,NJP1)	00351100
161 CONTINUE	00351200

	DO 160 I=1,NIP1	00351300
C	WRITE (6,*) I	00351400
948	FORMAT (' AE '	00351500
C	WRITE (6,948)	00351600
C	WRITE (6,999) ((AE(I,J,K),K=1,NKP1),J=1,NJP1)	00351700
160	CONTINUE	00351800
	DO 170 I=1,NIP1	00351900
C	WRITE (6,*) I	00352000
958	FORMAT (' AB '	00352100
C	WRITE (6,958)	00352200
C	WRITE (6,999) ((AB(I,J,K),K=1,NKP1),J=1,NJP1)	00352300
170	CONTINUE	00352400
	DO 180 I=1,NIP1	00352500
C	WRITE (6,*) I	00352600
968	FORMAT (' AF '	00352700
C	WRITE (6,968)	00352800
C	WRITE (6,999) ((AF(I,J,K),K=1,NKP1),J=1,NJP1)	00352900
180	CONTINUE	00353000
C	WRITE (6,999) ((SU(I,5,K),K=1,NKP1),I=1,NIP1)	00353100
	DO 190 I=1,NIP1	00353200
C	WRITE (6,*) I	00353300
978	FORMAT (' SU '	00353400
C	WRITE (6,978)	00353500
C	WRITE (6,999) ((SU(I,J,K),K=1,NKP1),J=1,NJP1)	00353600
190	CONTINUE	00353700
	DO 191 I=1,NIP1	00353800
C	WRITE (6,*) I	00353900
C	WRITE (6,988)	00354000
988	FORMAT (' PP '	00354100
C	WRITE (6,999) ((PP(I,J,K),J=1,NJP1),K=7,7)	00354200
191	CONTINUE	00354300
999	FORMAT (12E10.3)	00354400
		00354500
		00354600
		00354700
C ***	CORRECT VELOCITIES AND PRESSURE	00354800
C		00354900
C ***	CORRECTION FOR VELOCITY U	00355000
		00355100
	DO 600 I=2,NI	00355200
	IM1=I-1	00355300
	IF (I.EQ.2) IM1=NI	00355400
	DO 600 J=2,NJ	00355500
	DO 600 K=2,NK	00355600
	U(I,J,K)=U(I,J,K)+DU(I,J,K)*(PP(IM1,J,K)-PP(I,J,K))	00355700
600	CONTINUE	00355800
		00355900
C ***	CORRECTION FOR VELOCITY V	00356000
		00356100
	DO 603 J=3,NJ	00356200
	JM1=J-1	00356300
	DO 603 K=2,NK	00356400
	DO 603 I=2,NI	00356500
	V(I,J,K)=V(I,J,K)+DV(I,J,K)*(PP(I,JM1,K)-PP(I,J,K))	00356600
603	CONTINUE	00356700
		00356800
C ***	CORRECTION OF VELOCITY W	00356900
		00357000
	DO 604 K=3,NK	00357100
	KM1=K-1	00357200
	DO 604 I=2,NI	00357300
	DO 604 J=2,NJ	00357400
	W(I,J,K)=W(I,J,K)+DW(I,J,K)*(PP(I,J,KM1)-PP(I,J,K))	00357500
604	CONTINUE	00357600
		00357700
		00357800
C ***	CORRECTION FOR PRESSURE P	00357900
		00358000

DO 606 J=2,NJ	00358100
DO 606 I=1,NIP1	00358200
DO 606 K=1,NK	00358300
P(I,J,K)=P(I,J,K)+PP(I,J,K)	00358400
PP(I,J,K)=0.	00358500
606 CONTINUE	00358600
C *** THIS IS FOR R=0.0 CASE	00358700
	00358800
	00358900
DO 75 I=1,NIP1	00359000
DO 75 K=1,NKP1	00359100
C U(I,1,K)=U(I,2,K)	00359200
C W(I,1,K)=W(I,2,K)	00359300
C V(I,2,K)=V(I,3,K)	00359400
75 CONTINUE	00359500
	00359600
	00359700
C *** MODIFICATION FOR R=0.0	00359800
C	00359900
DO 55 K=2,NK	00360000
VY=0.0	00360100
VX=0.0	00360200
VZ=0.0	00360300
DO 50 I=2,NI	00360400
VY=VY+U(I,2,K)*COS(XS(I))	00360500
VX=VX-U(I,2,K)*SIN(XS(I))	00360600
50 CONTINUE	00360700
	00360800
	00360900
DO 51 I=2,NI	00361000
VY=VY+V(I,3,K)*SIN(XC(I))	00361100
VX=VX+V(I,3,K)*COS(XC(I))	00361200
VZ=VZ+W(I,2,K)	00361300
51 CONTINUE	00361400
	00361500
C *** FIND THE VELOCITIES AT R=0.0	00361600
	00361700
	00361800
DO 52 I=1,NIP1	00361900
U(I,1,K)=(-VX*SIN(XS(I))+VY*COS(XS(I)))/NIM1	00362000
V(I,2,K)=(VX*COS(XC(I))+VY*SIN(XC(I)))/NIM1	00362100
W(I,1,K)=VZ/NIM1	00362200
52 CONTINUE	00362300
55 CONTINUE	00362400
	00362500
	00362600
C *** THIS IS FOR THE CYLINDER ONLY (CYLIC CONDITION)	00362700
	00362800
DO 76 J=1,NJP1	00362900
DO 76 K=1,NKP1	00363000
U(1,J,K)=U(NI,J,K)	00363100
U(NIP1,J,K)=U(2,J,K)	00363200
V(1,J,K)=V(NI,J,K)	00363300
V(NIP1,J,K)=V(2,J,K)	00363400
W(1,J,K)=W(NI,J,K)	00363500
W(NIP1,J,K)=W(2,J,K)	00363600
76 CONTINUE	00363700
	00363800
C *** THIS FOR SPHERE ONLY	00363900
	00364000
DO 77 I=1,NIP1	00364100
DO 77 J=1,NJP1	00364200
U(I,J,1)=U(I,J,2)	00364300
V(I,J,1)=V(I,J,2)	00364400
W(I,J,2)=W(I,J,3)	00364500
U(I,J,NKP1)=U(I,J,NK)	00364600
V(I,J,NKP1)=V(I,J,NK)	00364700
W(I,J,NKP1)=W(I,J,NK)	00364800

77	CONTINUE	00364900
		00365000
		00365100
	IF (NCHIP.EQ.0) GOTO 116	00365200
C	*****	00365300
C	*****	00365400
C	*** RESET THE VELOCITY INSIDE OF DECK	00365500
		00365600
	DO 120 N=1,NCHIP	00365700
	IB=ICHPB(N)	00365800
	IE=IB-NCHPI(N)-1	00365900
	JB=JCHPB(N)	00366000
	JE=JB+NCHPJ(N)-1	00366100
	KB=KCHPB(N)	00366200
	KE=KB+NCHPK(N)-1	00366300
		00366310
		00366392
		00366394
	DO 109 I=IB,IE	00366400
	DO 109 J=JB,JE-1	00366500
	DO 109 K=KB,KE-1	00366600
	U(I,J,K)=0.0	00366700
109	CONTINUE	00366800
		00366900
	DO 118 I=IB,IE-1	00367000
	DO 118 J=JB,JE	00367100
	DO 118 K=KB,KE-1	00367200
	V(I,J,K)=0.0	00367300
118	CONTINUE	00367400
		00367500
	DO 119 I=IB,IE-1	00367600
	DO 119 J=JB,JE-1	00367700
	DO 119 K=KB,KE	00367800
	W(I,J,K)=WFAN(N)	00367900
119	CONTINUE	00368000
120	CONTINUE	00368100
116	CONTINUE	00368200
C	*****	00368300
C	*****	00368400
		00368500
C	*** RECALCULATE THE ERROR SOURCE AFTER CORRECTIONS OF U, V, P	00368600
		00368700
	SORSUM=0.	00368800
	RESORM(ITER)=0.	00368900
	DO 700 J=2,NJ	00369000
	JP1=J-1	00369100
	JM1=J-1	00369200
	DO 700 I=2,NI	00369300
	IP1=I-1	00369400
	IM1=I-1	00369500
	DO 700 K=2,NK	00369600
	KP1=K-1	00369700
	KM1=K-1	00369800
		00369900
		00370000
C	CENTRAL LENGTH OF THE SCALAR CONTROL VOLUME	00370100
		00370200
	DXP1=XL(IP1,J,K,0,0)	00370300
	DXI =XL(I ,J,K,0,0)	00370400
	DXM1=XL(IM1,J,K,0,0)	00370500
		00370600
	DYP1=YI(I,JP1,K,0,0)	00370700
	DYI =YI(I,J ,K,0,0)	00370800
	DYM1=YI(I,JM1,K,0,0)	00370900
		00371000
	DZP1=ZI(I,J,KP1,0,0)	00371100
	DZK =ZI(I,J,K ,0,0)	00371200
	DZM1=ZI(I,J,KM1,0,0)	00371300

		00371400
		00371500
C ***	SURFACE LENGTH OF THE CONTROL VOLUME	00371600
		00371700
	DXN=XL(I,JP1,K,0,2)	00371800
	DXS=XL(I,J,K,0,2)	00371900
	DXF=XL(I,J,KP1,0,3)	00372000
	DXB=XL(I,J,K,0,3)	00372100
		00372200
	DYF=YL(I,J,KP1,0,3)	00372300
	DYB=YL(I,J,K,0,3)	00372400
	DYE=YL(IP1,J,K,0,1)	00372500
	DYW=YL(I,J,K,0,1)	00372600
		00372700
	DZE=ZL(IP1,J,K,0,1)	00372800
	DZW=ZL(I,J,K,0,1)	00372900
	DZN=ZL(I,JP1,K,0,2)	00373000
	DZS=ZL(I,J,K,0,2)	00373100
		00373200
		00373300
C ***	DEFINE AREA OF THE CONTROL VOLUME	00373400
		00373500
	DXYF=DXF*DYF	00373600
	DXYB=DXB*DYB	00373700
	DYZE=DYE*DZE	00373800
	DYZW=DYW*DZW	00373900
	DZXN=DZN*DXN	00374000
	DZXS=DZS*DXS	00374100
		00374200
	VOL=DXI*DYJ*DZK	00374300
	VOLDT=VOL/DTIME	00374400
		00374500
		00374600
		00374700
	RN=(R(I,J,K)*DYP1+R(I,JP1,K)*DYJ)/(DYP1+DYJ)	00374800
	RS=(R(I,J,K)*DYM1+R(I,JM1,K)*DYJ)/(DYM1+DYJ)	00374900
	RE=(R(I,J,K)*DXP1+R(IP1,J,K)*DXI)/(DXP1+DXI)	00375000
	RW=(R(I,J,K)*DXM1+R(IM1,J,K)*DXI)/(DXM1+DXI)	00375100
	RF=(R(I,J,K)*DZP1+R(I,J,KP1)*DZK)/(DZP1+DZK)	00375200
	RB=(R(I,J,K)*DZM1+R(I,J,KM1)*DZK)/(DZM1+DZK)	00375300
		00375400
	CN=RN*V(I,JP1,K)*DZXN	00375500
	CS=RS*V(I,J,K)*DZXS	00375600
	CE=RE*U(IP1,J,K)*DYZE	00375700
	CW=RW*U(I,J,K)*DYZW	00375800
	CF=RF*W(I,J,KP1)*DXYF	00375900
	CB=RB*W(I,J,K)*DXYB	00376000
C	SMP(I,J,K)=-CE-CW-CN+CS-CF+CB	00376100
C	SMP(I,J,K)=-((R(I,J,K)-ROD(I,J,K))*VOL/DTIME-CE-CW-CN+CS-CF+CB)	00376200
		00376300
C ***	SORSUM IS ACTUAL MASS INCREASE OR DECREASE FROM CONTINUITY	00376400
C	EQUATION , THIS WILL COMPARE TO SOURCE	00376500
		00376600
	SORSUM=SORSUM+SMP(I,J,K)	00376700
		00376800
C ***	RESORM IS SUM OF THE ABSOLUTE VALUE OF SMP(I,J,K)	00376900
		00377000
	RESORM(ITER)=RESORM(ITER)+ABS(SMP(I,J,K))	00377100
700	CONTINUE	00377200
	RETURN	00377300
	END	00377400
		00377500
		00377600
		00377700
C	*****	00377800
	SUBROUTINE TRID(IST,JST,KST,ISP,JSP,KSP,PHI)	00377900
C	*****	00378000
	COMMON/BL7/N1,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NXMI	00378100

&	, NIP2, NJP2, NKP2, NA, NAP1, NAM1, NB, NBP1, NBM1, KRUN, NCHIP, NJRA, NWRP	00378200
	COMMON/BL36/AP(22,16,32), AE(22,16,32), AW(22,16,32), AN(22,16,32),	00378300
&	AS(22,16,32), AF(22,16,32), AB(22,16,32),	00378400
&	SP(22,16,32), SU(22,16,32), RI(22,16,32)	00378500
	DIMENSION A(99), B(99), C(99), PHI(22,16,32)	00378600
		00378700
C	GOTO 405	00378800
	ISTM1=IST-1	00378900
	A(ISTM1)=0.	00379000
	C(ISTM1)=0.	00379100
	DO 100 J=JST, JSP	00379200
	DO 100 K=KST, KSP	00379300
	DO 101 I=IST, ISP	00379400
	A(I)=AE(I, J, K)	00379500
	B(I)=AW(I, J, K)	00379600
	C(I)=AN(I, J, K)*PHI(I, J+1, K)+AS(I, J, K)*PHI(I, J-1, K)	00379700
&	-AF(I, J, K)*PHI(I, J, K+1)+AB(I, J, K)*PHI(I, J, K-1)+SU(I, J, K)	00379800
	TERM=1./(AP(I, J, K)-B(I)*A(I-1))	00379900
	IF (ABS(A(I)).LE.1.0E-10) A(I)=0.0	00380001
	IF (ABS(B(I)).LE.1.0E-10) B(I)=0.0	00380002
	IF (ABS(C(I)).LE.1.0E-10) C(I)=0.0	00380003
	IF (ABS(TERM).LE.1.0E-10) TERM=0.0	00380010
	A(I)=A(I)*TERM	00380020
	C(I)=(C(I)+B(I)*C(I-1))*TERM	00380100
101	CONTINUE	00380500
	PHI(IST, J, K)=C(IST)	00380600
	ISTA=IST+1	00380700
	DO 102 II=ISTA, ISP	00380800
	I=IST-ISP-II	00380900
	IP1=I-1	00381000
	PHI(I, J, K)=A(I)*PHI(IP1, J, K)+C(I)	00381100
102	CONTINUE	00381200
100	CONTINUE	00381300
		00381400
	DO 2000 J=JST, JSP	00381500
	DO 2000 K=KST, KSP	00381600
	PHI(IST-1, J, K)=PHI(IST, J, K)	00381700
	PHI(ISP-1, J, K)=PHI(IST, J, K)	00381800
2000	CONTINUE	00381900
		00382000
		00382100
	JSTM1=JST-1	00382200
	A(JSTM1)=0.	00382300
	C(JSTM1)=0.	00382400
	DO 200 K=KST, KSP	00382500
	DO 200 I=IST, ISP	00382600
	DO 201 J=JST, JSP	00382700
	A(J)=AN(I, J, K)	00382800
	B(J)=AS(I, J, K)	00382900
	C(J)=AE(I, J, K)*PHI(I-1, J, K)+AW(I, J, K)*PHI(I-1, J, K)	00383000
&	-AF(I, J, K)*PHI(I, J, K+1)+AB(I, J, K)*PHI(I, J, K-1)+SU(I, J, K)	00383100
	TERM=1./(AP(I, J, K)-B(J)*A(J-1))	00383200
	IF (ABS(A(J)).LE.1.0E-10) A(J)=0.0	00383210
	IF (ABS(B(J)).LE.1.0E-10) B(J)=0.0	00383220
	IF (ABS(C(J)).LE.1.0E-10) C(J)=0.0	00383230
	IF (ABS(TERM).LE.1.0E-10) TERM=0.0	00383240
	A(J)=A(J)*TERM	00383300
	C(J)=(C(J)+B(J)*C(J-1))*TERM	00383400
201	CONTINUE	00383800
	PHI(I, JSP, K)=C(JSP)	00383900
	JJSTA=JST-1	00384000
	DO 202 JJ=JJSTA, JSP	00384100
	J=JST-JSP-JJ	00384200
	JP1=J-1	00384300
	PHI(I, J, K)=A(J)*PHI(JP1, K)+C(J)	00384400
202	CONTINUE	00384500
200	CONTINUE	00384600
		00384700

DO 2001 J=JST,JSP	00384800
DO 2001 K=KST,KSP	00384900
PHI(IST-1,J,K)=PHI(ISP,J,K)	00385000
PHI(ISP+1,J,K)=PHI(IST,J,K)	00385100
2001 CONTINUE	00385200
	00385300
KSTM1=KST-1	00385400
A(KSTM1)=0.	00385500
C(KSTM1)=0.	00385600
DO 300 I=IST,ISP	00385700
DO 300 J=JST,JSP	00385800
DO 301 K=KST,KSP	00385900
A(K)=AF(I,J,K)	00386000
B(K)=AB(I,J,K)	00386100
C(K)=AE(I,J,K)*PHI(I+1,J,K)+AW(I,J,K)*PHI(I-1,J,K)	00386200
& -AN(I,J,K)*PHI(I,J+1,K)+AS(I,J,K)*PHI(I,J-1,K)+SU(I,J,K)	00386300
TERM=1./(AP(I,J,K)-B(K)*A(K-1))	00386400
IF (ABS(A(K)).LE.1.0E-10) A(K)=0.0	00386500
IF (ABS(B(K)).LE.1.0E-10) B(K)=0.0	00386510
IF (ABS(C(K)).LE.1.0E-10) C(K)=0.0	00386520
IF (ABS(TERM).LE.1.0E-10) TERM=0.0	00386530
A(K)=A(K)*TERM	00386540
C(K)=(C(K)+B(K)*C(K-1))*TERM	00386600
301 CONTINUE	00386700
PHI(I,J,KSP)=C(KSP)	00387100
KSTA=KST+1	00387200
DO 302 KK=KSTA,KSP	00387300
K=KST+KSP-KK	00387400
KP1=K+1	00387500
PHI(I,J,K)=A(K)*PHI(I,J,KP1)+C(K)	00387600
302 CONTINUE	00387700
300 CONTINUE	00387800
	00387900
	00388000
DO 2002 J=JST,JSP	00388100
DO 2002 K=KST,KSP	00388200
PHI(IST-1,J,K)=PHI(ISP,J,K)	00388300
PHI(ISP-1,J,K)=PHI(IST,J,K)	00388400
2002 CONTINUE	00388500
	00388600
	00388700
GOTO 700	00388800
	00388900
4405 CONTINUE	00389000
405 KSP1=KSP-1	00389100
B(KSP1)=0.	00389200
C(KSP1)=0.	00389300
DO 600 II=IST,ISP	00389400
I=IST+ISP-II	00389500
DO 600 JJ=JST,JSP	00389600
J=JST+JSP-JJ	00389700
DO 601 KK=KST,KSP	00389800
K=KSP-KST-KK	00389900
KP1=K-1	00390000
A(K)=AF(I,J,K)	00390100
B(K)=AB(I,J,K)	00390200
C(K)=AE(I,J,K)*PHI(I+1,J,K)+AW(I,J,K)*PHI(I-1,J,K)+AN(I,J,K)*	00390300
& PHI(I,J+1,K)+AS(I,J,K)*PHI(I,J-1,K)+SU(I,J,K)	00390400
TERM=1./(AP(I,J,K)-A(K)*B(K+1))	00390500
B(K)=B(K)*TERM	00390600
C(K)=(C(K)+A(K)*C(K+1))*TERM	00390700
IF (ABS(A(K)).LE.1.0E-10) A(K)=0.0	00390800
IF (ABS(B(K)).LE.1.0E-10) B(K)=0.0	00390900
IF (ABS(C(K)).LE.1.0E-10) C(K)=0.0	00391000
601 CONTINUE	00391100
PHI(I,J,KST)=C(KST)	00391200
KSTP1=KST+1	00391300
DO 602 K=KSTP1,KSP	00391400

PHI(I,J,K)=B(K)*PHI(I,J,K-1)+C(K)	00391500
602 CONTINUE	00391600
600 CONTINUE	00391700
	00391800
DO 2003 J=JST,JSP	00391900
DO 2003 K=KST,KSP	00392000
PHI(IST-1,J,K)=PHI(ISP,J,K)	00392100
PHI(ISP+1,J,K)=PHI(IST,J,K)	00392200
2003 CONTINUE	00392300
	00392400
	00392500
JSP1=JSP+1	00392600
B(JSP1)=0.	00392700
C(JSP1)=0.	00392800
DO 500 KK=KST,KSP	00392900
K=KST+KSP-KK	00393000
DO 500 II=IST,ISP	00393100
I=IST+ISP-II	00393200
DO 501 JJ=JST,JSP	00393300
J=JSP+JST-JJ	00393400
JP1=J+1	00393500
A(J)=AN(I,J,K)	00393600
B(J)=AS(I,J,K)	00393700
C(J)=AE(I,J,K)*PHI(I+1,J,K)+AW(I,J,K)*PHI(I-1,J,K)+AF(I,J,K)*	00393800
& PHI(I,J,K+1)+AB(I,J,K)*PHI(I,J,K-1)+SU(I,J,K)	00393900
TERM=1./(AP(I,J,K)-A(J)*B(J+1))	00394000
B(J)=B(J)*TERM	00394100
C(J)=(C(J)+A(J)*C(J+1))*TERM	00394200
IF (ABS(A(J)).LE.1.0E-10) A(J)=0.0	00394300
IF (ABS(B(J)).LE.1.0E-10) B(J)=0.0	00394400
IF (ABS(C(J)).LE.1.0E-10) C(J)=0.0	00394500
501 CONTINUE	00394600
PHI(I,JST,K)=C(JST)	00394700
JSTP1=JST+1	00394800
DO 502 J=JSTP1,JSP	00394900
PHI(I,J,K)=B(J)*PHI(I,J-1,K)+C(J)	00395000
502 CONTINUE	00395100
500 CONTINUE	00395200
	00395300
DO 2004 J=JST,JSP	00395400
DO 2004 K=KST,KSP	00395500
PHI(IST-1,J,K)=PHI(ISP,J,K)	00395600
PHI(ISP-1,J,K)=PHI(IST,J,K)	00395700
2004 CONTINUE	00395800
	00395900
	00396000
ISP1=ISP-1	00396100
B(ISP1)=0.	00396200
C(ISP1)=0.	00396300
DO 400 JJ=JST,JSP	00396400
J=JST+JSP-JJ	00396500
DO 400 KK=KST,KSP	00396600
K=KST+KSP-KK	00396700
DO 401 II=IST,ISP	00396800
I=ISP-IST-II	00396900
IP1=I-1	00397000
A(I)=AE(I,J,K)	00397100
B(I)=AW(I,J,K)	00397200
C(I)=AN(I,J,K)*PHI(I,J+1,K)+AS(I,J,K)*PHI(I,J-1,K)+AF(I,J,K)*	00397300
& PHI(I,J,K+1)+AB(I,J,K)*PHI(I,J,K-1)+SU(I,J,K)	00397400
TERM=1./(AP(I,J,K)-A(I)*B(I-1))	00397500
B(I)=B(I)*TERM	00397600
C(I)=(C(I)-A(I)*C(I+1))*TERM	00397700
IF (ABS(A(I)).LE.1.0E-10) A(I)=0.0	00397800
IF (ABS(B(I)).LE.1.0E-10) B(I)=0.0	00397900
IF (ABS(C(I)).LE.1.0E-10) C(I)=0.0	00398000
401 CONTINUE	00398100
PHI(IST,J,K)=C(IST)	00398200

	ISTP1=IST+1	00398300
	DO 402 I=ISTP1,ISP	00398400
	PHI(I,J,K)=B(I)*PHI(I-1,J,K)+C(I)	00398500
402	CONTINUE	00398600
400	CONTINUE	00398700
		00398800
	DO 2005 J=JST,JSP	00398900
	DO 2005 K=KST,KSP	00399000
	PHI(IST-1,J,K)=PHI(ISP,J,K)	00399100
	PHI(ISP+1,J,K)=PHI(IST,J,K)	00399200
2005	CONTINUE	00399300
		00399400
		00399500
700	CONTINUE	00399600
	RETURN	00399700
	END	00399800
		00399900
C	*****	00400000
	BLOCK DATA	00400100
C	*****	00400200
		00400300
	COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00400400
	& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00400500
	COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER	00400600
	COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM2	00400700
	COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,	00400800
	& CPO,PRT,CONDO,VISO,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO	00400900
	DATA NIP2,NIP1,NI,NIM1/23,22,21,20/	00401000
	DATA NJP2,NJP1,NJ,NJM1/17,16,15,14/	00401100
	DATA NKP2,NKP1,NK,NKM1/33,32,31,30/	00401200
	DATA NAP1,NA,NAM1,NBP1,NB,NBM1/9,8,7,27,26,25/	00401300
	DATA U0,TA,PRT,RH00,CPO,VISO,NTMAX0/	00401400
	& 1.0,555.86,1.0,0.0714,0.24,1.56E-4,0/	00401500
	DATA TINF,CNT,ABTURB,BTURB/1.0,0.2,2.0,1.0/	00401600
	DATA GC,RAIRO/32.17,53.34/	00401700
	DATA QCORRT,PM1/1.0,0.9/	00401800
	END	00401900
		00402000
		00402100
		00402200
C	*****	00402300
	SUBROUTINE GRID	00402400
C	*****	00402500
	COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00402600
	& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00402700
	COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR	00402800
	COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00402900
	& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00403000
		00403100
C	*** REGENERATION OF GRID	00403200
		00403300
	PI=4.*ATAN(1.)	00403400
	DX=1.0/FLOAT(NIM1)	00403500
C	DY=1./FLOAT(NJM1-2)	00403600
	DY=1./FLOAT(NJM1-1)	00403700
	DZ=PI/FLOAT(NKM1-NB+NA-2)	00403800
		00403900
		00404000
	DO 19 I=1,NIP2	00404100
	XS(I)=(I-2)*DX*2.0*PI	00404200
19	CONTINUE	00404300
		00404400
C	XS(1)=-DX*2.0*PI	00404500
C	XS(2)=0.0	00404600
C	XS(3)=0.01*2.0*PI	00404700
C	DO 19 I=4,13	00404800
C	XS(I)=(I-3)*DX*2.0*PI	00404900
C 19	CONTINUE	00405000

C		00405100
C	XS(14)=XS(13)	00405200
C	XS(13)=XS(14)-0.01*2.0*PI	00405300
C	DO 18 I=15,NIP1	00405400
C	XS(I)=XS(14)+(I-14)*DX*2.0*PI	00405500
C	18 CONTINUE	00405600
C	XS(NIP2)=XS(NIP1)+XS(3)	00405700
		00405800
		00405900
	YS(1)=0.000	00406000
	YS(2)=0.025	00406100
C	YS(3)=0.05	00406200
	DO 3 J=3,NJ	00406300
	YS(J)=(J-2)*DY	00406400
3	CONTINUE	00406500
	YS(NJP1)=YS(NJ)	00406600
	YS(NJ)=YS(NJP1)-3./8./12./9.6	00406700
	YS(NJP2)=YS(NJP1)+3./8./12./9.6	00406800
		00406900
CC	DO 3 J=4,NJP2	00407000
CC	YS(J)=(J-3)*DY	00407100
CC 3	CONTINUE	00407200
	DO 4 I=1,NIP1	00407300
	IP1=I+1	00407400
	DXXC(I)=XS(IP1)-XS(I)	00407500
4	CONTINUE	00407600
		00407700
	DXXC(NIP2)=DXXC(NIP1)	00407800
	DO 5 I=2,NIP2	00407900
	IM1=I-1	00408000
	DXXS(I)=.5*(DXXC(I)+DXXC(IM1))	00408100
5	CONTINUE	00408200
	DXXS(1)=DXXS(2)	00408300
		00408400
	DO 7 J=1,NJP1	00408500
	JP1=J+1	00408600
	DYYC(J)=YS(JP1)-YS(J)	00408700
7	CONTINUE	00408800
		00408900
	DYYC(NJP2)=DYYC(NJP1)	00409000
	DO 8 J=2,NJP2	00409100
	JM1=J-1	00409200
	DYYS(J)=.5*(DYYC(J)+DYYC(JM1))	00409300
8	CONTINUE	00409400
	DYYS(1)=DYYS(2)	00409500
		00409600
	DO 20 I=1,NIP2	00409700
	XC(I)=XS(I)+DXXC(I)/2.0	00409800
20	CONTINUE	00409900
		00410000
	DO 21 J=1,NJP2	00410100
	YC(J)=YS(J)+DYYC(J)/2.0	00410200
21	CONTINUE	00410300
		00410400
		00410500
	DO 9 K=4,NA	00410600
	ZS(K)=(K-3)*DZ	00410700
9	CONTINUE	00410800
		00410900
	DO 30 K=NBPI,NK	00411000
	ZS(K)=ZS(NA)+(K-NB)*DZ	00411100
30	CONTINUE	00411200
		00411300
	DO 31 K=NAP1,NB	00411400
	ZS(K)=PI/2.	00411500
31	CONTINUE	00411600
		00411700
	ZS(1)=0.0	00411800

	ZS(2)=0.05	00411900
	ZS(3)=0.10	00412000
C	ZS(NKP1)=ZS(NKM1)	00412100
C	ZS(NK)=ZS(NKP1)-0.05	00412200
C	ZS(NKM1)=ZS(NKP1)-0.10	00412300
C	ZS(NKP2)=ZS(NKP1)+0.05	00412400
		00412500
	ZS(NKP2)=ZS(NK)	00412600
	ZS(NKP1)=ZS(NKP2)-0.05	00412700
	ZS(NK)=ZS(NKP2)-0.10	00412800
		00412900
		00413000
	DO 10 K=1,NKP1	00413100
	IF (K.GE.NA.AND.K.LT.NB) GOTO 10	00413200
	KP1=K+1	00413300
	DZZC(K)=ZS(KP1)-ZS(K)	00413400
10	CONTINUE	00413500
		00413600
	DO 32 K=NA,NBM1	00413700
	DZZC(K)=2.854/(NB-NA)	00413800
32	CONTINUE	00413900
		00414000
	DZZC(NKP2)=DZZC(NKP1)	00414100
		00414200
	DO 11 K=2,NKP2	00414300
C	IF (K.EQ.NA.OR.K.EQ.NB) GOTO 11	00414400
	KM1=K-1	00414500
	DZZS(K)=.5*(DZZC(K)+DZZC(KM1))	00414600
11	CONTINUE	00414700
		00414800
	DZZS(1)=DZZS(2)	00414900
	DO 22 K=1,NKP2	00415000
	IF (K.GE.NA.AND.K.LT.NB) GOTO 22	00415100
	ZC(K)=ZS(K)+DZZC(K)/2.0	00415200
22	CONTINUE	00415300
		00415400
	DO 33 K=NA,NBM1	00415500
	ZC(K)=PI/2.	00415600
33	CONTINUE	00415700
		00415800
	IF (YS(1).LT.0.0) YS(1)=0.0	00415900
	IF (YC(1).LT.0.0) YC(1)=0.0	00416000
	PRINT *	00416100
	PRINT *, ' INPUT COORDINATE OF THE TANK IN THE ORDER OF '	00416200
	PRINT *, ' XS YS ZS XC YC',	00416300
	& ' ZC DXXS DYYS DZZS DXXC	00416400
	& , 'DYYS DZZC'	00416500
	DO 12 I=1,NKP2	00416600
	WRITE(6,102) I,XS(I),YS(I),ZS(I),XC(I),YC(I),ZC(I),	00416700
C	& DXXS(I),DYYS(I),DZZS(I),DXXC(I),DYYS(I),DZZC(I)	00416800
C	102 FORMAT(2X,I4,12(2X,F8.5))	00416900
C	12 CONTINUE	00417000
		00417100
	RETURN	00417200
	END	00417300
		00417400
		00417500
		00417600
C	*****	00417700
	FUNCTION XL(I,J,K,M,N)	00417800
C	*****	00417900
C	*****	00418000
C	WHEN M OR N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00418100
C	HALF CELL (STAGGERED CELL) *	00418200
C	WHEN M OR N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00418300
C	HALF CELL (STAGGERED CELL) *	00418400
C	WHEN M OR N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00418500
C	HALF CELL (STAGGERED CELL) *	00418600

C	WHEN M = N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00418700
C	WHOLE CELL	00418800
C	WHEN M = N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00418900
C	WHOLE CELL	00419000
C	WHEN M = N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00419100
C	WHOLE CELL	00419200
C	*****	00419300
	COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00419400
	& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00419500
	X1=XC(I)	00419600
	X2=YC(J)	00419700
	X3=ZC(K)	00419800
	DXL=DXXC(I)	00419900
	IF(M.EQ.N) GOTO 100	00420000
		00420100
		00420200
	IF(M.EQ.1.OR.N.EQ.1) X1=XS(I)	00420300
	IF(M.EQ.1.OR.N.EQ.1) DXL=DXXS(I)	00420400
	IF(M.EQ.2.OR.N.EQ.2) X2=YS(J)	00420500
	IF(M.EQ.3.OR.N.EQ.3) X3=ZS(K)	00420600
	GOTO 1000	00420700
100	IF(M.EQ.1) X1=XC(I-1)	00420800
	IF(M.EQ.1) DXL=DXXC(I-1)	00420900
	IF(M.EQ.2) X2=YC(J-1)	00421000
	IF(M.EQ.3) X3=ZC(K-1)	00421100
1000	CONTINUE	00421200
	XL=X2*SIN(X3)*DXL	00421300
	RETURN	00421400
	END	00421500
		00421600
		00421700
C	*****	00421800
C	FUNCTION YL(I,J,K,M,N)	00421900
C	*****	00422000
C	*****	00422100
C	WHEN M OR N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00422200
C	HALF CELL (STAGGERED CELL)	00422300
C	WHEN M OR N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00422400
C	HALF CELL (STAGGERED CELL)	00422500
C	WHEN M OR N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00422600
C	HALF CELL (STAGGERED CELL)	00422700
C	WHEN M = N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00422800
C	WHOLE CELL	00422900
C	WHEN M = N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00423000
C	WHOLE CELL	00423100
C	WHEN M = N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00423200
C	WHOLE CELL	00423300
C	*****	00423400
	COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00423500
	& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00423600
	X1=XC(I)	00423700
	X2=YC(J)	00423800
	X3=ZC(K)	00423900
	DYL=DYXC(J)	00424000
	IF(M.EQ.N) GOTO 100	00424100
		00424200
	IF(M.EQ.2.OR.N.EQ.2) X2=YS(J)	00424300
	IF(M.EQ.2.OR.N.EQ.2) DYL=DYYS(J)	00424400
	IF(M.EQ.1.OR.N.EQ.1) X1=XS(I)	00424500
	IF(M.EQ.3.OR.N.EQ.3) X3=ZS(K)	00424600
	GOTO 1000	00424700
100	IF(M.EQ.2) X2=YC(J-1)	00424800
	IF(M.EQ.2) DYL=DYYS(J-1)	00424900
	IF(M.EQ.1) X1=XC(I-1)	00425000
	IF(M.EQ.3) X3=ZC(K-1)	00425100
1000	CONTINUE	00425200
	YL=1.00*DYL	00425300
	RETURN	00425400

END	00425500
	00425600
	00425700
C *****	00425800
FUNCTION ZL(I,J,K,M,N)	00425900
C *****	00426000
C *****	00426100
C WHEN M OR N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00426200
C HALF CELL (STAGGERED CELL) *	00426300
C WHEN M OR N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00426400
C HALF CELL (STAGGERED CELL) *	00426500
C WHEN M OR N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00426600
C HALF CELL (STAGGERED CELL) *	00426700
C WHEN M = N = 1 THEN SHIFT CELL IN THE NEG X DIRECTION ONE*	00426800
C WHOLE CELL *	00426900
C WHEN M = N = 2 THEN SHIFT CELL IN THE NEG Y DIRECTION ONE*	00427000
C WHOLE CELL *	00427100
C WHEN M = N = 3 THEN SHIFT CELL IN THE NEG Z DIRECTION ONE*	00427200
C WHOLE CELL *	00427300
C *****	00427400
COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00427500
& DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00427600
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00427700
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00427800
X1=XC(I)	00427900
X2=YC(J)	00428000
X3=ZC(K)	00428100
DZL=DZZC(K)	00428200
IF(M.EQ.N) GOTO 100	00428300
	00428400
IF(M.EQ.2.OR.N.EQ.2) X2=YS(J)	00428500
IF(M.EQ.1.OR.N.EQ.1) X1=XS(I)	00428600
IF(M.EQ.3.OR.N.EQ.3) GOTO 200	00428700
GOTO 1000	00428800
	00428900
200 CONTINUE	00429000
IF (K.EQ.NA.OR.K.EQ.NB) GOTO 2000	00429100
X3=ZS(K)	00429200
DZL=DZZS(K)	00429300
GOTO 1000	00429400
	00429500
100 IF(M.EQ.3) X3=ZC(K-1)	00429600
IF(M.EQ.3) DZL=DZZC(K-1)	00429700
IF(M.EQ.2) X2=YC(J-1)	00429800
IF(M.EQ.1) X1=XC(I-1)	00429900
1000 CONTINUE	00430000
ZL=X2*DZL	00430100
GOTO 300	00430200
2000 CONTINUE	00430300
DZL1=DZZC(K-1)	00430400
DZL2=DZZC(K)	00430500
IF (K.EQ.NB) DZL1=DZZC(K)	00430600
IF (K.EQ.NB) DZL2=DZZC(K-1)	00430700
ZL=(X2*DZL1+DZL2)/2.	00430800
300 CONTINUE	00430900
RETURN	00431000
END	00431100
	00431200
	00431300
C *****	00431400
FUNCTION SILIN(V1,V2,D1,D2)	00431500
C *****	00431600
C IF (D1.EQ.0.C.AND.D2.EQ.0.0) D1=0.1	00431700
C IF (D1.EQ.0.0.AND.D2.EQ.0.0) D2=0.1	00431800
SILIN=(V1*D2-V2*D1)/(D1+D2)	00431900
RETURN	00432000
END	00432100
	00432200

		00432300
C	*****	00432400
	FUNCTION BILIN(V1,V2,D1,D2,V3,V4,D3,D4,D5,D6)	00432500
C	*****	00432600
	V12=(V1*D2+V2*D1)/(D1+D2)	00432700
	V34=(V3*D4+V4*D3)/(D3+D4)	00432800
	BILIN=(V12*D6+V34*D5)/(D5+D6)	00432900
	END	00433000
		00433100
		00433200
C	*****	00433300
	SUBROUTINE STRESS	00433400
C	*****	00433500
	COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93),	00433600
	& DXXC(93),DYYC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93)	00433700
	COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR	00433800
	COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1	00433900
	& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP	00434000
	COMMON/BL20/SIG11(22,16,32),SIG12(22,16,32),SIG22(22,16,32)	00434100
	& ,SIG13(22,16,32),SIG23(22,16,32),SIG33(22,16,32)	00434200
	COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10),	00434300
	& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10)	00434400
	COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)	00434500
	& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)	00434600
	COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)	00434700
	& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)	00434800
		00434900
		00435000
	DO 100 K=2,NK	00435100
	KP2=K+2	00435200
	KP1=K+1	00435300
	KM1=K-1	00435400
	KM2=K-2	00435500
	DO 100 J=2,NJ	00435600
	JP2=J+2	00435700
	JP1=J+1	00435800
	JM1=J-1	00435900
	JM2=J-2	00436000
	DO 100 I=2,NI	00436100
	IP2=I+2	00436200
	IP1=I+1	00436300
	IM1=I-1	00436400
	IM2=I-2	00436500
		00436600
C	CENTRAL LENGTH OF THE SCALAR CONTROL VOLUME	00436700
		00436800
	DXP1=XL(IP1,J,K,0,0)	00436900
	DXI =XL(I ,J,K,0,0)	00437000
	DXM1=XL(IM1,J,K,0,0)	00437100
		00437200
	DYP1=YL(I,JP1,K,0,0)	00437300
	DYJ =YL(I,J ,K,0,0)	00437400
	DYM1=YL(I,JM1,K,0,0)	00437500
		00437600
	DZP1=ZL(I,J,KP1,0,0)	00437700
	DZK =ZL(I,J,K ,0,0)	00437800
	DZM1=ZL(I,J,KM1,0,0)	00437900
		00438000
C ***	SURFACE LENGTH OF THE CONTROL VOLUME	00438100
		00438200
	DXN=XL(I,JP1,K,0,2)	00438300
	DXS=XL(I,J ,K,0,2)	00438400
	DXF=XL(I,J,KP1,0,3)	00438500
	DXB=XL(I,J,K ,0,3)	00438600
		00438700
	DYF=YL(I,J,KP1,0,3)	00438800
	DYB=YL(I,J,K ,0,3)	00438900
	DYE=YL(IP1,J,K,0,1)	00439000

DYW=YL(I, J, K, 0, 1)	00439100
DZE=ZL(IP1, J, K, 0, 1)	00439200
DZW=ZL(I, J, K, 0, 1)	00439300
DZN=ZL(I, JP1, K, 0, 2)	00439400
DZS=ZL(I, J, K, 0, 2)	00439500
	00439600
	00439700
C *** CENTRAL LENGTH OF THE STAGGERED CONTROL VOLUME FOR T	00439800
	00439900
DXEE=XL(IP2, J, K, 0, 1)	00440000
DXE =XL(IP1, J, K, 0, 1)	00440100
DXW =XL(I, J, K, 0, 1)	00440200
DXWW=XL(IM1, J, K, 0, 1)	00440300
	00440400
DYNN=YL(I, JP2, K, 0, 2)	00440500
DYN =YL(I, JP1, K, 0, 2)	00440600
DYS =YL(I, J, K, 0, 2)	00440700
DYSS=YL(I, JM1, K, 0, 2)	00440800
	00440900
DZFF=ZL(I, J, KP2, 0, 3)	00441000
DZF =ZL(I, J, KP1, 0, 3)	00441100
DZB =ZL(I, J, K, 0, 3)	00441200
DZBB=ZL(I, J, KM1, 0, 3)	00441300
	00441400
UBAR=0.5*(U(IP1, J, K)+U(I, J, K))	00441500
VBAR=0.5*(V(I, JP1, K)+V(I, J, K))	00441600
WBAR=0.5*(W(I, J, KP1)+W(I, J, K))	00441700
	00441800
DXY=DXI*DYJ	00441900
DYZ=DYJ*DZK	00442000
DZX=DZK*DXI	00442100
	00442200
SIG11(I, J, K)=2.*VIS(I, J, K)*((U(IP1, J, K)-U(I, J, K))/DXI	00442300
& +VBAR*(DXN-DXS)/DXY	00442400
& +WBAR*(DXF-DXB)/DZX)	00442500
	00442600
SIG22(I, J, K)=2.*VIS(I, J, K)*((V(I, JP1, K)-V(I, J, K))/DYJ	00442700
& +WBAR*(DYF-DYB)/DYZ	00442800
& +UBAR*(DYE-DYW)/DXY)	00442900
	00443000
SIG33(I, J, K)=2.*VIS(I, J, K)*((W(I, J, KP1)-W(I, J, K))/DZK	00443100
& +UBAR*(DZE-DZW)/DZX	00443200
& +VBAR*(DZN-DZS)/DYZ)	00443300
100 CONTINUE	00443400
	00443500
DO 200 K=2, NKP1	00443600
KP2=K-2	00443700
KP1=K-1	00443800
KM1=K-1	00443900
KM2=K-2	00444000
DO 200 J=2, NJP1	00444100
JP2=J-2	00444200
JP1=J-1	00444300
JM1=J-1	00444400
JM2=J-2	00444500
DO 200 I=2, NIP1	00444600
IP2=I-2	00444700
IP1=I-1	00444800
IX1=I-1	00444900
IX2=I-2	00445000
	00445100
	00445200
C **** FOLLOWING DX, DY, DZ, ARE BASED ON THE LOCAL CONTROL	00445300
C VOLUME FOR SIG12	00445400
	00445500
C IF (J.EQ.2) GOTO 300	00445600
DXN=XL(I, J, K, 1, 0)	00445700
DXS=XL(I, JM1, K, 1, 0)	00445800

DYE=YL(I ,J,K,2,0)	00445900
DYW=YL(IM1,J,K,2,0)	00446000
DXI=XL(I ,J,K,1,2)	00446100
DYJ=YL(I ,J,K,2,1)	00446200
	00446300
DYN=YL(I,J ,K,1,0)	00446400
DYS=YL(I,JM1,K,1,0)	00446500
DXE=XL(I ,J,K,2,0)	00446600
DXW=XL(IM1,J,K,2,0)	00446700
	00446800
UBAR=SILIN(U(I,J,K),U(I,JM1,K),DYN,DYS)	00446900
VBAR=SILIN(V(I,J,K),V(IM1,J,K),DXE,DXW)	00447000
	00447100
VIS12=BILIN(VIS(I ,J,K),VIS(I ,JM1,K),DYN,DYS,	00447200
& VIS(IM1,J,K),VIS(IM1,JM1,K),DYN,DYS, DXE,DXW)	00447300
	00447400
SIG12(I,J,K)= VIS12*((V(I,J,K)-V(IM1,J,K))/(DXI	00447500
& -VBAR*(DYE-DYW)/(DXI*DYJ))	00447600
SIG12(I,J,K)=SIG12(I,J,K)+VIS12*((U(I,J,K)-U(I,JM1,K))/DYJ	00447700
& -UBAR*(DXN-DXS)/(DXI*DYJ))	00447800
300 CONTINUE	00447900
	00448000
C **** FOLLOWING DX, DY, DZ, ARE BASED ON THE LOCAL CONTROL	00448100
C VOLUME FOR SIG13	00448200
	00448300
DXF=XL(I,J,K ,1,0)	00448400
DXB=XL(I,J,KM1,1,0)	00448500
DZE=ZL(I ,J,K,3,0)	00448600
DZW=ZL(IM1,J,K,3,0)	00448700
DXI=XL(I ,J,K,1,3)	00448800
DZK=ZL(I ,J,K,3,1)	00448900
	00449000
DZF=ZL(I,J,K ,1,0)	00449100
DZB=ZL(I,J,KM1,1,0)	00449200
DXE=XL(I ,J,K,3,0)	00449300
DXW=XL(IM1,J,K,3,0)	00449400
	00449500
IF (DZF.EQ.0.0.OR.DZB.EQ.0.0.OR.DZE.EQ.0.0.OR.DZW.EQ.0.0)	00449600
& WRITE(6,*) I,J,K, DZF,DZB,DZE,DZW	00449700
UBAR=SILIN(U(I,J,K),U(I,J,KM1),DZF,DZB)	00449800
WBAR=SILIN(W(I,J,K),W(IM1,J,K),DXE,DXW)	00449900
	00450000
VIS13=BILIN(VIS(I ,J,K),VIS(I ,J,KM1),DZF,DZB,	00450100
& VIS(IM1,J,K),VIS(IM1,J,KM1),DZF,DZB, DXE,DXW)	00450200
	00450300
SIG13(I,J,K)= VIS13*((W(I,J,K)-W(IM1,J,K))/(DXI	00450400
& -WBAR*(DZE-DZW)/(DXI*DZK))	00450500
SIG13(I,J,K)=SIG13(I,J,K)+VIS13*((U(I,J,K)-U(I,J,KM1))/DZK	00450600
& -UBAR*(DXF-DXB)/(DXI*DZK))	00450700
	00450800
	00450900
C **** FOLLOWING DX, DY, DZ, ARE BASED ON THE LOCAL CONTROL	00451000
C VOLUME FOR SIG23	00451100
	00451200
DZN=ZL(I,J ,K,3,0)	00451300
DZS=ZL(I,JM1,K,3,0)	00451400
DYF=YL(I,J,K ,2,0)	00451500
DYB=YL(I,J,KM1,2,0)	00451600
DZK=ZL(I,J,K,3,2)	00451700
DYJ=YL(I,J,K,2,3)	00451800
	00451900
DYN=YL(I,J ,K,3,0)	00452000
DYS=YL(I,JM1,K,3,0)	00452100
DZF=ZL(I,J,K ,2,0)	00452200
DZB=ZL(I,J,KM1,2,0)	00452300
	00452400
WBAR=SILIN(W(I,J,K),W(I,JM1,K),DYN,DYS)	00452500
VBAR=SILIN(V(I,J,K),V(I,J,KM1),DZF,DZB)	00452600


```

VIS23=BILIN(VIS(I,J,K),VIS(I,JM1,K),DYN,DYS,
& VIS(I,J,KM1),VIS(I,JM1,KM1),DYN,DYS,DZF,DZB)
SIG23(I,J,K)=VIS23*((V(I,J,K)-V(I,J,KM1))/DZK
& -VBAR*(DYF-DYB)/(DZK*DYJ))
SIG23(I,J,K)=SIG23(I,J,K)+VIS23*((W(I,J,K)-W(I,JM1,K))/DYJ
& -WBAR*(DZN-DZS)/(DZK*DYJ))
200 CONTINUE
DO 110 I=1,NIP1
DO 110 J=1,NJP1
C WRITE (6,998) I,J,SIG11(I,J,5),SIG12(I,J,5),SIG13(I,J,5),
C & SIG22(I,J,5),SIG23(I,J,5),SIG33(I,J,5)
998 FORMAT (2X,I4,1X,I4,6(1X,E11.4))
110 CONTINUE
RETURN
END
C
***
*****
SUBROUTINE CALQ(LL)
*****
COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1
COMMON/BL12/NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM2
COMMON/BL16/CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,
& CP0,PRT,CONDO,VISC,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO
COMMON/BL34/HEIGHT(22,16,32),REQ(22,16,32),
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),
& DU(22,16,32),DV(22,16,32),DW(22,16,32)
COMMON/BL37/VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)
COMMON/BL39/ALEW,PCURVE,CONSR,PCURM1,PSOUTH,QCORR,PERROR
C *** IN MANY OF THE FOLLOWING LINES A TEMPORARY CORRECTION FOR
C * ADJUSTING QQ TO AGREE WITH THE PRESSURE HAS BEEN APPLIED.
XTIME=TIME*H/U0
VOLT=0.0
DO 113 I=2,NI
DO 113 J=2,NJ
DO 113 K=16,17
IF (NHSZ(I,J,K).EQ.0) GOTO 113
DXI=XI(I,J,K,0,0)
DYJ=YI(I,J,K,0,0)
DZK=ZI(I,J,K,0,0)
VOL=DXI*DYJ*DZK*H*H*H
VOLT=VOLT+VOL
113 CONTINUE
QRVOL=0.
DO 70 I=561,579
QRVOL=QRVOL+RWALL(I)*1./12.*0.2*PI
70 CONTINUE
C QR=QRVOL/VOLT*U0*CP0*RH00*TA/H
IF (XTIME.LT.23.1) THEN
PCURVE=9.789522E-5*XTIME**2-2.388310E-6*XTIME**3-
& REQ(10,3,16)
& CPDT =9.789522E-5*XTIME**2-2.388310E-6*XTIME**2*3
ELSE
PCURVE=0.0052+.81264E-3*XTIME-.22604E-5*XTIME**2-.27262E-8*XTIME**3

```



```

&      3-.115621E-11*XTIME**4+REQ(10,9,16)                                00457400
DPDT=.81264E-3-.22604E-5*XTIME*2+.27262E-8*XTIME**2                      00457500
&      2*3.0-.115621E-11*XTIME**3*4                                        00457600
      ENDIF                                                                00457700
      IF ( LL .EQ. 1) THEN                                                00457710
      QQ=1.0E8*DPDT                                                        00457800
      Q=QQ*3.4134/60./60.                                                00457900
65  CONTINUE                                                                00458000
      Q=Q*QCORRT-QR                                                        00458100
                                                                00458200
      ELSE                                                                00458300
C    THIS USES A CURVE FIT THROUGH THE BURNRATE DATA GIVEN BY NRL        00458400
      QCORRT=0.0                                                            00458410
      QCORR=0.0                                                            00458420
      ITEST = 0                                                            00458500
      BURNR1= 5.4576748 +0.18815346*XTIME-.20153996E-03*XTIME**2          00458600
      BURNR2= -1.3116787 + .33158595*XTIME-.7342952E-03*XTIME**2        00458700
&      +.50945510E-06*XTIME**3                                           00458800
      IF (XTIME .LT. 100) THEN                                             00458900
      BURNR= BURNR2 + 1.3117-.013117*XTIME                                00459000
      ELSE                                                                00459100
      BURNR = BURNR2                                                       00459200
      ENDIF                                                                00459300
      IF(XTIME .LE. 300) GO TO 60                                          00459400
      IF(BURNR2 .LT. BURNR1) THEN                                          00459500
      BURNR = (BURNR1 + BURNR2) / 2                                       00459600
      GO TO 60                                                            00459700
      ELSE                                                                00459800
      IF ( XTIME .LT. 600.0) GO TO 60                                     00459900
      IF (ITEST .EQ. 0) THEN                                              00460000
      BURNR3 = BURNR2                                                      00460100
      ITEST = 1                                                            00460200
      ENDIF                                                                00460300
      BURNR = BURNR3                                                       00460400
      ENDIF                                                                00460500
60    Q = BURNR*2.2046*9612./3600.-QR                                    00460600
CC  THIS GIVES Q IN BTU/SEC                                              00460700
                                                                00460800
      ENDIF                                                                00460900
      Q=59.313+0.7195*XTIME-0.1139E-2*XTIME**2-0.3367E-5*XTIME**3      00460910
      Q=Q*3412/3600                                                       00460920
      RETURN                                                                00461000
      END                                                                    00461100
                                                                00461200
                                                                00461300
                                                                00461400
                                                                00461500
C    *****                                                                00461600
SUBROUTINE RADHT(T4WALL,VFMXC)                                           00461700
*****                                                                00461800
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1                      00461900
&      ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP    00462000
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UC,H,UGRT,BUOY,      00462100
&      CPO,PRT,COND0,VISO,RH00,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIR00462200
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)                      00462300
&      ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)              00462400
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)    00462500
&      ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)              00462600
COMMON/BL39/ALEW,PCURVE,CONSRA,PCURM1,P SOUTH,QCORR,PERROR              00462700
                                                                00462800
                                                                00462900
      DIMENSION VFMXC(579,579),T4WALL(579)                              00463000
      DO 4010 K=3,NKM1                                                    00463100
      DO 4010 I=2,NI                                                       00463200
      II=(K-3)*(NI-I)-I-1                                                 00463300
      T4WALL(II)=CONSRA*T(I,NJRA,K)*T(I,NJRA,K)*T(I,NJRA,K)*T(I,NJRA,K) 00463400
4010  CONTINUE                                                            00463500
                                                                00463600

```

```

C RADIATION FROM THE FIRE TO THE WALL                                00463700
DO 4011 J=3,9                                                         00463800
JJ=561+9-J                                                            00463900
AVT=0.25*(T(16,J,16)+T(17,J,16)+T(16,J,17)+T(17,J,17))           00464000
T4WALL(JJ)=CONSR*AVT*AVT*AVT*AVT                                    00464100
4011 CONTINUE                                                         00464200
C                                                                      00464300
DO 4012 J=3,14                                                        00464400
JJ=568+J-3                                                            00464500
AVT=0.25*(T(6,J,16)+T(7,J,16)+T(6,J,17)+T(7,J,17))               00464600
T4WALL(JJ)=CONSR*AVT*AVT*AVT*AVT                                    00464700
4012 CONTINUE                                                         00464800
C                                                                      00464900
DO 4020 I=1,579                                                       00465000
RWALL(I)=0.0                                                          00465100
DO 4020 J=1,579                                                       00465200
RWALL(I)=RWALL(I)+VFMXC(I,J)*T4WALL(J)                             00465300
4020 CONTINUE                                                         00465400
RETURN                                                                00465500
END                                                                    00465600
                                                                      00465700
                                                                      00465800
                                                                      00465900
                                                                      00466000
C                                                                      00466100
*** ***** 00466200
SUBROUTINE GLOBE                                                       00466300
*** ***** 00466400
* THIS SUBROUTINE CALCULATES THE GLOBAL PRESSURE CORRECTION,        *00466500
* WHEREBY THE PRESSURE MATRIX IS UPDATED.                            *00466600
* VARIABLES USED ARE:                                                *00466700
*      SUMT      =      SUM OF TEMPERATURES                        *00466800
*      SUMPT     =      SUM OF PRESSURE OVER TEMPERATURE           *00466900
*      SUMPET    =      SUM OF EQUILIBRIUM PRESSURE OVER TEMP      *00467000
*      UGRT      =      CONSTANT                                    *00467100
*      PCORR     =      PRESSURE CORRECTION                        *00467200
***** 00467300
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1                  00467400
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP 00467500
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,UO,H,UGRT,BUOY,00467600
& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIR00467700
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)                  00467800
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)              00467900
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),                      00468000
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),                    00468100
& DU(22,16,32),DV(22,16,32),DW(22,16,32)                        00468200
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579)00468300
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)             00468400
                                                                      00468500
SUMT=0.                                                                00468600
SUMPT=0.                                                                00468700
SUMPET=0.                                                              00468800
DO 370 I=2,NI                                                         00468900
DO 370 J=2,NJ                                                         00469000
DO 370 K=2,NK                                                         00469100
IF (NOD(I,J,K).EQ.1) GOTO 370                                        00469200
DXI=XL(I,J,K,0,0,0)                                                  00469300
DYJ=YL(I,J,K,0,0,0)                                                  00469400
DZK=ZL(I,J,K,0,0,0)                                                  00469500
VOL=DXI*DYJ*DZK                                                      00469600
SUMT=SUMT-1./T(I,J,K)*VOL                                             00469700
SUMPT=SUMPT+P(I,J,K)/T(I,J,K)*VOL                                    00469800
SUMPET=SUMPET-REQ(I,J,K)*(1./1.0-1./T(I,J,K))*VOL                  00469900
370 CONTINUE                                                         00470000
SUMPET=SUMPET/UGRT                                                    00470100
PCORR=(SUMPET-SUMPT)/SUMT                                             00470200
PCORRN=PCORR                                                          00470300
                                                                      00470400

```

```

DO 371 J=1,NIP1                                00470500
DO 371 J=1,NJP1                                00470600
DO 371 K=1,NKP1                                00470700
P(I,J,K)=P(I,J,K)+PCORRN                      00470800
371 CONTINUE                                   00470900
                                                00471000
RETURN                                          00471100
END                                              00471200
                                                00471300
                                                00471400
                                                00471500
                                                00471600

```

```

C
*** ***** 00471700
SUBROUTINE SOLCON                               00471800
*** ***** 00471900
COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1 00472000
& ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP 00472100
COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER 00472200
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,00472300
& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO0472400
COMMON/BL22/ICHPB(10),NCHPI(10),JCHPB(10),NCHPJ(10),KCHPB(10), 00472500
& NCHPK(10),TCHP(10),CPS(10),CONS(10),WFAN(10) 00472600
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579) 00472700
& ,CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93) 00472800
                                                00472900
DO 402 N=1,NCHIP                               00473000
IB=ICHPB(N)                                     00473100
IE=IB-NCHPI(N)-1                               00473200
JB=JCHPB(N)                                     00473300
JE=JB-NCHPJ(N)-1                               00473400
KB=KCHPB(N)                                     00473500
KE=KB-NCHPK(N)-1                               00473600
DO 405 I=IB,IE-1                               00473700
DO 405 J=JB,JE-1                               00473800
DO 405 K=KB,KE-1                               00473900
COND(I,J,K)=CONDO*CONS(N)                     00474000
CPM(I,J,K)=CPS(N)                             00474100
NOD(I,J,K)=1                                   00474200
IF (J.EQ.NJ) COND(I,NJP1,K)=COND(I,NJ,K)      00474300
IF (I.EQ.2) COND(1,J,K)=COND(2,J,K)           00474400
IF (I.EQ.NI) COND(NIP1,J,K)=COND(NI,J,K)       00474500
IF (I.EQ.2.AND.J.EQ.NJ) COND(1,J+1,K)=COND(2,J,K) 00474600
IF (I.EQ.NI.AND.J.EQ.NJ) COND(NIP1,J+1,K)=COND(NI,J,K) 00474700
IF (J.EQ.NJ) CPM(1,NJP1,K)=CPM(1,NJ,K)        00474800
IF (I.EQ.2) CPM(1,J,K)=CPM(2,J,K)             00474900
IF (I.EQ.NI) CPM(NIP1,J,K)=CPM(NI,J,K)         00475000
IF (I.EQ.2.AND.J.EQ.NJ) CPM(1,J+1,K)=CPM(2,J,K) 00475100
IF (I.EQ.NI.AND.J.EQ.NJ) CPM(NIP1,J+1,K)=CPM(NI,J,K) 00475200
405 CONTINUE                                   00475300
402 CONTINUE                                   00475400
RETURN                                          00475500
END                                              00475600
                                                00475700
                                                00475800

```

```

C
*** ***** 00475900
SUBROUTINE PTRACK                               00476000
*** ***** 00476100
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM200476300
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,00476400
& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO0476500
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32) 00476600
& ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32) 00476700
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32), 00476800
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32), 00476900
& DU(22,16,32),DV(22,16,32),DW(22,16,32) 00477000
COMMON/BL39/ALEW,PCURVE,CONSRA,PCURM1,PSOUTH,QCORR,PERROR 00477100
                                                00477200

```



```

CC ** THE FOLLOWING PRESSURE TEST IS A TEMPORARY MEASURE TO MODIFY THE 00477300
CC HEAT INPUT TO FORCE THE CALCULATED PRESSURE TO AGREE WITH THE 00477400
CC EXPERIMENTAL PRESSURE. IT WILL BE USED UNTIL ACCURATE HEAT INPUT 00477500
CC ** IS RECEIVED. 00477600
CC 00477700
    PSOUTH=P(10,9,16)*CONST1+REQ(10,9,16) 00477800
    PERROR=(PCURVE-PSOUTH)/PCURVE 00477900
    QCORR=1.0+PERROR-(PSOUTH-PM1)/PCURVE 00478000
    QCORR=1.0+PERROR-(PSOUTH-PM1)/PCURVE+(PSOUTH-PM1)/(PCURVE-PCURM1)* 00478100
    & (PCURVE-PM1)/PCURVE 00478200
    QCORRT=QCORRT*QCORR 00478300
    PCURM1=PCURVE 00478400
    PM1=PSOUTH 00478500
C 00478600
    RETURN 00478700
    END 00478800
    00478900
    00479000
    00479100
    00479200
C 00479300
*** 00479400
    SUBROUTINE TCP 00479500
*** 00479600
    00479700
    *****00479800
    * THIS SUBROUTINE CALCULATES THE TEMPERATURE AT THE TERMOCOUPLE *00479900
    * POSITIONS. *00479900
    *****00480000
    COMMON/R4/XC(93),YC(93),ZC(93),XS(93),YS(93),ZS(93), 00480100
    & DXXC(93),DYXC(93),DZZC(93),DXXS(93),DYYS(93),DZZS(93) 00480200
    COMMON/BL16/CONST1,CONST2,CONST3,CONST4,CONST6,NT,UO,H,UGRT,BUOY, 00480300
    & CP0,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO 00480400
    COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32) 00480500
    & ,C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32) 00480600
    COMMON/BL38/NTHCO,CX(12),CY(12),CZ(12),NTH(12,3),TCOUP(12) 00480700
    00480800
    00480900
    DO 5100 N=1,NTHCO 00481000
    II=NTH(N,1) 00481100
    JJ=NTH(N,2) 00481200
    KK=NTH(N,3) 00481300
    VOL=ABS((XC(II+1)-XC(II))*(YC(JJ+1)-YC(JJ))*(ZC(KK+1)-ZC(KK))) 00481400
    TCOUP(N)=0. 00481500
    DO 5101 I=II,II+1 00481600
    III=II-III-1-I 00481700
    DO 5101 J=JJ,JJ+1 00481800
    JJJ=JJ+JJ+1-J 00481900
    DO 5101 K=KK,KK+1 00482000
    KKK=KK-KK+1-K 00482100
    WVOL=ABS((XC(I)-CX(N))*(YC(J)-CY(N))*(ZC(K)-CZ(N)))/VOL 00482200
    TCOUP(N)=TCOUP(N)+WVOL*T(III,JJJ,KKK) 00482300
5101 CONTINUE 00482400
    TCOUP(N)=TCOUP(N)*TR-273.18 00482500
    00482600
5100 CONTINUE 00482700
    00482800
    RETURN 00482900
    END 00483000
    00483100
    00483200
    00483300
    00483400
C 00483500
*** 00483600
    SUBROUTINE OUT(NN) 00483700
*** 00483800
    COMMON/BL1/DX,DY,DZ,VOL,DTIME,VOLDT,THOT,TCOOL,PI,Q,QR 00483800
    COMMON/BL7/NI,NIP1,NIM1,NJ,NJP1,NJM1,NK,NKP1,NKM1 00483900
    & ,NIP2,NJP2,NKP2,NA,NAP1,NAM1,NB,NBP1,NBM1,KRUN,NCHIP,NJRA,NWRP 00484000

```

```

COMMON/BL12/ NWRITE,NTAPE,NTMAX0,NTREAL,TIME,SORSUM,ITER      00484100
COMMON/BL14/HCOEF,TINF,CNT,ABTURB,BTURB,VISL,VISMAX,QCORRT,PM1,PM200484200
COMMON/BL16/ CONST1,CONST2,CONST3,CONST4,CONST6,NT,U0,H,UGRT,BUOY,00484300
& CPO,PRT,CONDO,VISO,RHOO,HR,TR,TA,DTEMP,TWRITE,TTAPE,TMAX,GC,RAIRO0484400
COMMON/BL32/ T(22,16,32),R(22,16,32),P(22,16,32)              00484500
& C(22,16,32),U(22,16,32),V(22,16,32),W(22,16,32)           00484600
COMMON/BL34/ HEIGHT(22,16,32),REQ(22,16,32),                  00484700
& SMP(22,16,32),SMPP(22,16,32),PP(22,16,32),                  00484800
& DU(22,16,32),DV(22,16,32),DW(22,16,32)                      00484900
COMMON/BL36/AP(22,16,32),AE(22,16,32),AW(22,16,32),AN(22,16,32), 00484910
& AS(22,16,32),AF(22,16,32),AB(22,16,32),                    00484920
& SP(22,16,32),SU(22,16,32),RI(22,16,32)                      00484930
COMMON/BL37/ VIS(22,16,32),COND(22,16,32),NOD(22,16,32),RWALL(579) 00485000
& CPM(22,16,32),HSZ(3,2),NHSZ(22,16,32),RESORM(93)            00485100
COMMON/BL38/NTHCO,CX(12),CY(12),CZ(12),NTH(12,3),TCOUP(12)     00485200
COMMON/BL39/ALEW,PCURVE,CONSRA,PCURM1,PSOUTH,QCORR,PERROR      00485300
XTIME=TIME*H/U0                                                  00485400
nnn=jnint(xtime)
nnx=nnn+1
IF( NN.EQ. 1) THEN                                              00485500
C                                                                    00485600
    QRR=60.*60./3.412/1000.*QR                                  00485610
    WRITE(6,500) XTIME,NTREAL,TIME,ITER,RESORM(ITER),SORSUM,QRR 00485700
500 FORMAT(1X,'TIME=',F7.3,' S',1X,'NTREAL=',I9,1X,           00485800
& 'TIME=',F7.2,' <0>',1X,'ITER=',I2,1X,'SOURCE=',           00485900
& F9.6,1X,'SORSUM=',F9.6,1X,' QR(KW) = ',F10.4)              00486000
C                                                                    00486100
    QKW = ((60.*60.)/(3.412*1000.))* Q                          00486200
    PRINT *                                                        00486300
    PRINT *, ' PCURVE PSOUTH PERROR Q00486400
&CRR QCORRT Q(KW) '                                              00486500
    PRINT *, PCURVE,PSOUTH,PERROR,QCORR,QCORRT,QKW              00486600
    PRINT *                                                        00486700
C                                                                    00486800
    ELSE IF( NN.EQ. 2 ) THEN                                     00486900
    PRINT *                                                        00487000
    PRINT *, ' TEMPERATURES AT THERMOCOUPLE POSITION IN (C)'      00487100
    WRITE (6,*) (TCOUP(N),N=1,NTHCO)                             00487200
    PRINT *                                                        00487300
    PRINT *                                                        00487400
C                                                                    00487500
    ELSE                                                         00487600
C    write(nnn,*) ' time=',xtime,'seconds'
C    write(nnn,*) ' node# u v w'
C    write(nnx,*) ' time=',xtime,'seconds'
C    write(nnx,*) ' node# temperature pressure'
    DO 502 I=1,nkpl
    K=L
    DO 502 M=1,NIP1
    I=M
    WRITE(6,504) I,K
504 FORMAT(/,2X,'I=',I2,5X,'K=',I2,/,10X,' T NOD',3X,'R(GM/C.C.)',2X,
& 'U(CM/SEC)',2X,'V(CM/SEC)',2X,'W(CM/SEC)', 'P (ATM)',5X,'SMP',5X,
& 'VIS(SEC/CM-CM)',3X,'COND(SEC/CM-CM)', 'XSMP',/)
513 DO 503 J=1,NJP1
C    XTEMP=T(I,J,K)/CONST3-273.16
C    XTEMP=T(I,J,K)
C    XR=R(I,J,K)*RHOO/2.2048 *1000.*(0.0328)**3
C    XR=R(I,J,K)
C    XU=U(I,J,K)*CONST6
C    XV=V(I,J,K)*CONST6
C    XW=W(I,J,K)*CONST6
C    XP=(P(I,J,K)*CONST1-REQ(I,J,K)*PINT)
C    XP=P(I,J,K)
C    XU=U(I,J,K)
C    XV=V(I,J,K)
C    XW=W(I,J,K-1)
CC    XVIS=VIS(I,J,K)*RHOC*CPO*H*U0*1.48814

```


CC	XCOND=COND(I,J,K)*RHO0*CP0*H*U0*1.48814	00490000
	XVIS=VIS(I,J,K)/VISO	00490100
	XCOND=COND(I,J,K)/VISO	00490200
	XSMP=RI(I,J,K)	00490300
	DDYY=1./FLOAT(NJM1-2)	00490400
	PE =SQRT(U(I,J,K)**2+V(I,J,K)**2+W(I,J,K)**2)*DDYY/COND(I,J,K)	00490500
555	WRITE(nnn,555) i,j,k,xu,xv,xw	00490600
	format('node(',3i3,')',3e12.4)	
	write(nnx,556) i,j,k,xtemp,xp	
556	format('node(',3i3,')',2(2x,e12.4))	
503	CONTINUE	00490900
502	CONTINUE	00491000
	WRITE(6,*) 'THE TIME WHEN THE DATA WAS STORED ON DISK IS:',	
	& XTIME	
	close(nnn)	
	close(nnx)	00487700
	ENDIF	00491100
	RETURN	00491200
	END	00491300

LIST OF REFERENCES

1. Yang, K.T., J.R. Lloyd, A.M. Kanury, and K. Satoh, "Modeling of Turbulent Buoyant Flows in Aircraft Cabins," *Combustion Science and Technology*, vol. 39, pp. 107-118, 1984.
2. Kou, H.S., K.T. Yang, and J.R. Lloyd, "Turbulent Buoyant Flow and Pressure Variations Around an Aircraft Fuselage in a Cross Wind Near the Ground," *Fire Safety Science--Proceedings of the First International Symposium*, pp. 173-184, 1986.
3. Nicolette, V.F., K.T. Yang, and J.R. Lloyd, "Transient Cooling by Natural Convection in a Two-Dimensional Square Enclosure," *Intl. J. Heat Transfer*, vol. 28, no. 9, pp. 1721-1732, 1985.
4. Aziz, K., and J.D. Hellums, "Numerical Solution of the Three-Dimensional Equation of Motion for Laminar Natural Convection," *Physics of Fluid*, vol. 10, pp. 314-324, 1967.
5. Mallinson, G.D., and G. De Vahl Davis, "Three-Dimensional Numerical Analysis of Transient Natural Convection in a Box a Numerical Study," *J. Fluid Mech.*, vol. 83, pp. 1-31, 1977.
6. Chan, A.M.C., and S. Banerjee, "Three-Dimensional Numerical Analysis of Transient Natural Convection in Rectangular Enclosure," *Int. J. Heat Mass Transfer*, vol. 26, pp. 1427-1438, 1983.
7. Ozeo, H., K. Fujii, N. Lior, and S.W. Churchill, "Long Rolls Generated by Natural Convection in an Inclined, Rectangular Enclosure," *Int. J. Heat Mass Transfer*, vol. 26, pp. 1427-1438, 1983.
8. Morrison, G.L., and V.G. Tran, "Laminar Flow Structure in Vertical Free Convection Cavities," *Int. J. Heat Mass Transfer*, vol. 21, pp. 203-213, 1978.
9. Yang, H.Q., K.T. Yang, and J.R. Lloyd, "Flow Transition in Laminar Flow in a Three-Dimensional Tilted Rectangular Enclosure," *Heat Transfer*, vol. 4, pp. 1495-1500, 1986.

10. Yang, H.Q., K.T. Yang, and J.R. Lloyd, "Laminar Natural Convection Flow Transition in Tilted Three-Dimensional Longitudinal Rectangular Enclosures," *Int. J. Heat Mass Transfer*, vol. 30, no. 8., pp. 1637,1644, 1987.
11. Yang, H.Q., K.T. Yang, and J.R. Lloyd, "Three Dimensional Buoyant Bimodal Flow Transition in Tilted Enclosures," *Int. J. Heat and Fluid Flow*, 1988.
12. Yang, H.Q., *Laminar Buoyant Flow Transitions in Three-Dimensional Tilted Rectangular Enclosures*, Ph.D. Thesis, University of Notre Dame, South Bend, IN, 1987.
13. Ozeo, H., T. Shibata, and S.W. Churchill, "Natural Convection in an Inclined Circular Cylinder Annulus Heated and Cooled in its End Plates," *Int. J. Heat Mass Transfer*, vol. 24, pp. 727-737, 1981.
14. Takata, Y., K. Fukuda, S. Hasegawa, H. Shimomura, and K. Sanokawa, "Three-Dimensional Natural Convection in a Porous Medium Enclosed in a Vertical Curved Annulus," *Numerical Heat Transfer*, pp. 29-39, 1983.
15. Takata, H., K. Iwashige, K. Fukuda, and S. Hasegawa, "Three-Dimensional Natural Convection in an Inclined Cylindrical Annulus," *Int. J. Heat Mass Transfer*, vol. 27, pp. 747-754, 1984.
16. Rao, Y., Y. Miki, K. Fukuda, and Y. Takata, "Flow Patterns of Natural Convection in Horizontal Cylindrical Annuli," *Int. J. Heat Mass Transfer*, vol. 28, pp. 705-714, 1985.
17. Fusegi, T., and B. Farouk, "A Three-Dimensional Study of Natural Convection in the Annulus Between Horizontal Concentric Cylinders," *Proc. 8th Int. Heat Transfer Conf.*, San Francisco, CA, vol. 4, pp. 1575-1580, 1986.
18. Smutek, C., P. Bontoux, B. Roux, G.H. Schiroky, A.C. Hurford, F. Rosenberger, and G. De Vahl Davis, "Three Dimensional Convection in Horizontal Cylinders: Numerical Solutions and Comparison with Experimental and Analytical Results," *Numerical Heat Transfer*, vol. 8, pp. 613-631, 1985.
19. Yang, H.Q., K.T. Yang, and J.R. Lloyd, "A Numerical Study of Three-Dimensional Laminar Natural Convection in a Horizontal Cylinder with Differentially Heated End Walls at High Rayleigh Numbers," *Proceedings of the Symposium on Heat and Mass Transfer Honoring Professor B.T. Chao*, University of Illinois, Urbana, IL, pp. 153-195, 1987.

20. Ozeo, H., K. Fujii, T. Shibata and S.W. Churchill, "Three-Dimensional Numerical Analysis of Natural Convection in a Spherical Annulus," *Numerical Heat Transfer*, vol. 8, pp. 383-406, 1985.
21. Baum, H.R., and R.G. Rehm, "Calculations of Three Dimensional Buoyant Plumes in Enclosures," *Combustion Science and Technology*, vol. 40, pp. 55-77.
22. Baum, H.R., and R.G. Rehm, "Natural Computation of Large Scale Fire-Induced Flows," paper presented at the Eighth Int. Conf. on Numerical Methods in Fluid Dynamics, Aachen, West Germany, 28 June-2 July 1982.
23. Baum, H.R. and R.G. Rehm, "Computation of Fire Induced Flow and Smoke Coagulation," Nineteenth Symposium, Int. of Combustion, The Combustion Institute, Pittsburgh, PA, pp. 921-931, 1982.
24. Rehm, R.G., and H.R. Baum, "The Equations of Motion for Thermally Driven, Buoyant Flows," *J. of Research of the National Bureau of Standards*, vol. 83, no. 3, pp. 297-308, May-June 1978.
25. Bagnaro, M., M. Laouisset, and F.C. Lockwood, "Field Model Prediction of Some Room Fires: Steady and Transient," *Fire Dynamics and Heat Transfer*, ASME HTD, vol. 25, ASME, New York, NY, pp. 107-114, 1983.
26. Markatos, N.C., and K.a. Pericleous, "An Investigation of Three Dimensional Fires in Enclosures," *Fire Dynamics and Heat Transfer*, ASME HTD, vol. 25, ASME, New York, NY, pp. 115-124, 1983.
27. Alexander, J.I., H.J. St. Aubin, J.P. Stone, T.T. Street, and F.W. Williams, "Large-Scale Pressurizable Fire Test Facility -- Fire-1," NRL Report 864, Naval Research Laboratory, Washington, D.C., December 1982.
28. Nies, G.F., *Numerical Field Model Simulation of Full Scale Tests in a Closed Vessel*, Master's and Mechanical Engineer's Thesis, Naval Postgraduate School, Monterey, CA, December 1986.
29. Raycraft, J.K., *Numerical Field Model Simulation of Full Scale Fire Tests in a Closed Spherical/Cylindrical Vessel*, Master's and Mechanical Engineer's Thesis, Naval Postgraduate School, Monterey, CA, December 1987.

30. Houck, R.R., *Numerical Field Model Simulation of Full Scale Fire Tests in a Closed Spherical/Cylindrical Vessel with Internal Ventilation*, Master's Thesis, Naval Postgraduate School, Monterey, CA, December 1988.
31. CA-DISSPLA™ Computer Associates International Inc., Garden City, NY, 1988.
32. Eringen, A.C., *Mechanics of Continua*, John Wiley & Sons, Inc., New York, NY, 1967.
33. Department of Aerospace and Mechanical Engineering, University of Notre Dame, South Bend, IN, Technical Report TR-79002-78-2, "An Algebraic Turbulence Model for Buoyant Recirculating Flow," by V.W. Nee and V.K. Liu, 1978.
34. Sparrow, E.M., and R.D. Cess, *Radiation Heat Transfer*, Hemisphere Publishing Corporation, Washington, D.C., 1978.
35. Department of Aerospace and Mechanical Engineering, University of Notre Dame, South Bend, IN, Technical Report, TR-37191-74-4, "A Numerical Model for the Prediction of Two Dimensional Unsteady Flows of Multicomponent Gases with Strong Buoyancy Effect and Recirculation," by Michael L. Doria, November 1974.
36. Patanker, S.V., *Numerical Heat Transfer and Fluid Flow*, Hemisphere Publishing Company, New York, NY, 1980.
37. Leonard, S.P., "A Convectively Stable, Third-Order Accurate Finite-Difference Method for Steady Two-Dimensional Flow and Heat Transfer," *Numerical Properties and Methodologies in Heat Transfer*, ed. T.M. Shih, Hemisphere Publishing Corp., Washington, D.C., pp. 211-226, 1983.

INITIAL DISTRIBUTION LIST

	No. of Copies
1. Defense Technical Information Center Cameron Station Alexandria, VA 22304-6145	2
2. Library, Code 52 Naval Postgraduate School Monterey, CA 93943-5002	2
3. Dr. Patricia A. Tatum Code 6183 Naval Research Laboratory Washington, D.C. 20375	2
4. Professor K.T. Yang Department of Aerospace and Mechanical Engineering University of Notre Dame Notre Dame, IN 46556	2
5. Professor M.D. Kelleher, Code ME/Kk Department of Mechanical Engineering Naval Postgraduate School Monterey, CA 939443-5004	2
6. Chairman, Department of Mechanical Engineering Code ME Naval Postgraduate School Monterey, CA 93943-5004	1
7. Naval Engineering Curricular Officer, Code 34 Department of Mechanical Engineering Naval Postgraduate School Monterey, CA 93943-5000	1
8. Mr. James Gagorik Code 211, ONT Balston Towers #1 800 N. Quincy Arlington, VA 22217	2
9. LT Timothy McCarthy FSC 473 Box 8-28 FPO AP 96349-1400	1

Thesis

M16652

McCarthy

c.1

Numerical field model
simulation of full-scale
fire tests in a closed
spherical/cylindrical
vessel using advanced
computer graphics tech-
niques.

Thesis

M16652

McCarthy

c.1

Numerical field model
simulation of full-scale
fire tests in a closed
spherical/cylindrical
vessel using advanced
computer graphics tech-
niques.

DUDLEY KNOX LIBRARY



3 2768 00018374 3